

IMP-C1000-SFP Series

Compact Industrial Gigabit PoE+ Ethernet-to-Fiber Media Converter, 1*10/100/1000TX (PSE: 30W) to 1*100/1000 SFP Slot



Features


- ▶ Compact Industrial Grade Design
- ▶ UTP to Fiber Media Converter
- ▶ Embedded 1 Port PoE Injector Function
- ▶ RJ-45 Port Support Auto MDI/MDI-X Function
- ▶ Auto Negotiation Speed, Half/Full Duplex
- ▶ Store-and-Forward Switching Architecture
- ▶ Built-in Link Fault Pass Through & Far End Fault
- ▶ Jumbo Frame Support: 10k bytes
- ▶ Wide-Range Redundant Power Design
- ▶ Redundant Power Input: 48~55VDC
- ▶ Power Polarity Reverse Protection
- ▶ Overload Current Protection
- ▶ DIN-Rail or Wall Mountable
- ▶ IP30 Protection
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' IMP-C1000-SFP series is a compact IP-30 rated gigabit Ethernet-to-Fiber media converter featuring a 10/100/1000TX Ethernet port that supports IEEE 802.3at high power PoE supplying up to 30 watts, and has a dual rate 100/1000 SFP slot. It is perfectly designed to fulfill industrial applications that require distance extension and high bandwidth capabilities. This small form factor is ideal for saving space in outdoor applications such as factory automation, security, ITS transportation, power/utility, water wastewater treatment plants, and any other extreme ambient weather environments.

The IMP-C1000-SFP series has a built-in "Link Fault Pass Through" (LFP) and "Far End Fault" (FEF) function with 48~55VDC redundant power inputs with reverse polarity and overload current protection. This product series supports DIN-rail as well as wall mountable orientations and there are two operating temperature range models in STD: -10°C to 70°C and EOT: -40°C to 80°C.

DIMENSIONS

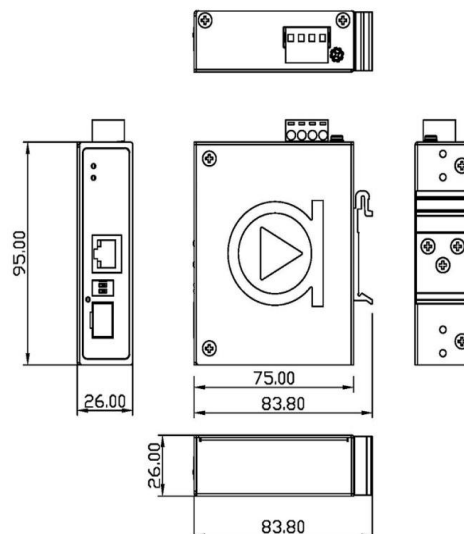

SPECIFICATIONS

Technology		Power Requirements	
Standards	IEEE 802.3 10Base-T Ethernet	Input Voltage	48 to 55VDC, Redundant Inputs
	IEEE 802.3u 100Base-TX Fast Ethernet	Power Connection	1 removable 4-contact terminal block
	IEEE 802.3ab 1000Base-T Gigabit Ethernet	Power Consumption	3 Watts for System
	IEEE 802.3z 1000Base-X Gigabit Fiber	Max. PoE Power Budget	30 Watts
	IEEE 802.3af/at Power over Ethernet	Mechanical Characteristics	
Processing Type	Store and Forward	Housing	Metal, IP30 protection
Protocol	CSMA/CD	Dimensions	26 x 95 x 75 mm (W x H x D)
Flow Control	IEEE 802.3x back pressure flow control	Weight	Unit 0.55lbs.; Shipping Weight 0.99 lbs.
Switch Properties		Mounting	DIN-Rail Mounting, Wall Mounting
Memory Buffer	1Mbits	Environmental Limits	
Jumbo Frame	10Kbytes	Operating Temperature	STD: -10°C to 70°C EOT: -40°C to 80°C
MAC Table Size	8K	Storage Temperature	-40°C to 85°C
Interface		Ambient Relative Humidity	5% to 95%, (non-condensing)
Ethernet Port	1*RJ45 Port w/10/100/1000TX with PoE+, auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection	Regulatory Approvals	
PoE Pin Out	V+, V+, V-, V- for pin1,2,3,6 Endspan, MDI Alternative A	EMI	FCC Part 15 Subpart B Class A, CE EN 55022 Class A
Fiber Port	1*100/1000 SFP Slot	EMS	IEC61000-4-2 (ESD) IEC61000-4-3 (RS) IEC61000-4-4 (EFT) IEC61000-4-5 (Surge) IEC61000-4-6 (CS) IEC61000-4-8 (Magnetic Field)
Fiber Wavelength	Depends on SFP modules		
DIP Switch	DIP Switch 1: LFP(Link Fault Pass) Enable/Disable		
	DIP Switch 2: SFP 100Mbps/ 1000Mbps		
LED Indicators	Unit: PWR, PoE		
	TX: Link/Act/Speed Fiber: Link/Act/Speed		
		Free Fall	IEC60068-2-32
		Shock	IEC60068-2-27
		Vibration	IEC60068-2-6
		Green	RoHS Compliant
		Certifications	FCC, CE, UL 61010-1, UL 61010-2-201
		Warranty	5 Years

ORDERING INFO

IMP-C1000-SFP	Compact Industrial Gigabit PoE+ Ethernet-to-Fiber Media Converter, 1*10/100/1000TX (PSE: 30W) to 1*100/1000 SFP Slot
IMP-C1000-SFP-T	Compact Industrial Gigabit PoE+ Ethernet-to-Fiber Media Converter, 1*10/100/1000TX (PSE: 30W) to 1*100/1000 SFP Slot; EOT: -40°C to 80°C
Optional Accessories	
DR-75-48	75 Watt Series / 48 VDC / 1.6 Amps Industrial Single Output DIN Rail Power Supply
DR-120-48	120 Watt Series / 48 VDC / 2.5 Amps Industrial Single Output DIN Rail Power Supply
SDR-120-48	120 Watt Series / 48 VDC / 2.5 Amps Industrial Slim High-Efficiency Single Output DIN Rail Power Supply
SDR-240-48	240 Watt Series / 48 VDC / 5.0 Amps Industrial Slim High-Efficiency Single Output DIN Rail Power Supply
SDR-480-48	480 Watt Series / 48 VDC / 10.0 Amps Industrial Slim High-Efficiency Single Output DIN Rail Power Supply

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660