




## SFP-100WA20 100BASE-BX-ONU Transceiver

SFP BIDI, Single LC Connector, 1310nm FP LD for Single Mode Fiber, RoHS Compliant



### Features



- 1310nm FP LD
- Data Rate: 125~155Mbps, NRZ
- Single +3.3V Power Supply
- RoHS Compliant and Lead-free
- AC/AC Differential Electrical Interface
- Compliant with Multi-Source Agreement (MSA) Small Form Factor Pluggable (SFP)
- Single LC Connector
- Compliance with specifications for IEEE-802.3ah 100BASE-BX10-U
- Compliance with FDDI PMD Standard
- Compliance with ATM Standard

### Applications

- Fast Ethernet
- FDDI
- ATM/SONET OC-3/SDH STM-1
- Single mode fiber links
- Optical-Electrical Interface Conversion

### Description

The SFP-100WA20 from AAXEON is the high performance and cost-effective module for serial optical data communication applications specified for single mode of 125 Mb/s. It operates on +3.3V power. The module is intended for Single-mode fiber, operates at a nominal wavelength of Tx: 1310nm / Rx: 1550nm, and complies with Multi-Source Agreement (MSA) Small Form Factor Pluggable (SFP). Each module consists of a bi-directional optical subassembly that combines a transmitter with a receiver and an electrical subassembly. All are housed in a metal package and the combination produces a reliable component.

The module is a single fiber connector transceiver designed for use in Ethernet applications and to provide IEEE-802.3ah compliant link for 125Mb/s intermediate reach applications. The characteristics are performed in accordance with Telcordia Specification GR-468-CORE.

### EMC

Most equipment utilizing high-speed transceivers will be required to meet the following requirements:

- 1) FCC in the United States
- 2) CENELEC EN55022 (CISPR 22) in Europe

To assist the customer in managing the overall equipment EMC performance, the transceivers have been designed to satisfy FCC class B limits and provide good immunity to radio-frequency electromagnetic fields.

### Eye Safety

The transceivers have been designed to meet Class 1 eye safety and comply with EN 60825-1.



## SFP-100WA20 100BASE-BX-ONU Transceiver

### Product Information

| Model Number | Operating Voltage & SD Output | Distance | LD Type & Wavelength | Output Power | Sensitivity |
|--------------|-------------------------------|----------|----------------------|--------------|-------------|
| SFP-100WA20  | 3.3V TTL AC/AC                | 20 km    | 1310 nm FP / 1550 nm | -14 ~ -8 dBm | ≤-32 dBm    |

### ABSOLUTE MAX RATINGS

| PARAMETER           | SYMBOL          | MIN | MAX             | UNIT | NOTE |
|---------------------|-----------------|-----|-----------------|------|------|
| Storage Temperature | T <sub>S</sub>  | -40 | 85              | °C   |      |
| Supply Voltage      | V <sub>CC</sub> | 0   | 6               | V    |      |
| Data Input Voltage  | ---             | 0   | V <sub>CC</sub> | V    |      |

### OPERATING CONDITIONS

| PARAMETER                  | SYMBOL          | MIN. | TYP. | MAX. | UNIT | NOTE |
|----------------------------|-----------------|------|------|------|------|------|
| Case Operating Temperature | T <sub>A</sub>  | 0    |      | 70   | °C   |      |
| Supply Voltage             | V <sub>CC</sub> | 3.1  |      | 3.5  | V    |      |
| Data Input Voltage Swing   | V <sub>ID</sub> | 400  |      | 1600 | mV   |      |

### ELECTRICAL CHARACTERISTICS

| PARAMETER                                 | SYMBOL            | MIN                   | MAX                   | UNIT | NOTE |
|-------------------------------------------|-------------------|-----------------------|-----------------------|------|------|
| <b>Transmitter</b>                        |                   |                       |                       |      |      |
| Transmitter Supply Current                | I <sub>CC</sub> T |                       | 200                   | mA   |      |
| Tx_Disable Input Voltage - Low            | V <sub>IL</sub>   | 0                     | 0.8                   | V    |      |
| Tx_Disable Input Voltage - High           | V <sub>IH</sub>   | 2.0                   | V <sub>CC</sub>       | V    |      |
| Tx_Fault Output Voltage - Low             | V <sub>OL</sub>   | 0                     | 0.8                   | V    |      |
| Tx_Fault Output Voltage - High            | V <sub>OH</sub>   | 2.0                   | V <sub>CC</sub>       | V    |      |
| <b>Receiver</b>                           |                   |                       |                       |      |      |
| Receiver Supply Current                   | I <sub>CC</sub> R |                       | 100                   | mA   |      |
| Receiver Data Output Differential Voltage | V <sub>OD</sub>   | 0.4                   | 1.3                   | V    |      |
| Rx_LOS Output Voltage - Low               | V <sub>OL</sub>   | 0                     | 0.8                   | V    |      |
| Rx_LOS Output Voltage - High              | V <sub>OH</sub>   | 2.0                   | V <sub>CC</sub>       | V    |      |
| MOD_DEF (1) , MOD_DEF (2) - Low           | V <sub>IL</sub>   | -0.6                  | V <sub>CC</sub> × 0.3 | V    |      |
| MOD_DEF (1) , MOD_DEF (2) - High          | V <sub>IH</sub>   | V <sub>CC</sub> × 0.7 | V <sub>CC</sub> + 0.5 | V    |      |

### TRANSMITTER ELECTRO-OPTICAL CHARACTERISTICS

| PARAMETER                     | SYMBOL                                                  | MIN  | TYP. | MAX  | UNIT | NOTE |
|-------------------------------|---------------------------------------------------------|------|------|------|------|------|
| Optical Output Power          | P <sub>O</sub>                                          | -14  |      | -8   | dBm  | 1    |
| Extinction Ratio              | ER                                                      | 8.2  |      |      | dB   |      |
| Center Wavelength             | λ <sub>c</sub>                                          | 1260 | 1310 | 1360 | nm   |      |
| Spectral Width (RMS)          | Δλ                                                      |      |      | 4    | nm   |      |
| Optical Rise time ( 10%-90% ) | t <sub>r</sub>                                          |      |      | 2.0  | ns   |      |
| Optical Fall time ( 10%-90% ) | t <sub>f</sub>                                          |      |      | 2.0  | ns   |      |
| Output Eye                    | Compliant with IEEE802.3ah and ITU recommendation G.957 |      |      |      |      |      |



## SFP-100WA20 100BASE-BX-ONU Transceiver

### RECEIVER ELECTRO-OPTICAL CHARACTERISTICS

| PARAMETER                   | SYMBOL      | MIN         | TYP. | MAX  | UNIT | NOTE |
|-----------------------------|-------------|-------------|------|------|------|------|
| Maximum Input Optical Power | $P_{max}$   | -3          |      |      | dBm  | 2    |
| Receiver Sensitivity        | $P_{min}$   |             |      | -32  | dBm  | 2    |
| Operating Wavelength        | $\lambda$   | 1480        |      | 1600 | nm   |      |
| Optical Return Loss         | ORL         | 14          |      |      | dB   |      |
| Loss of Signal - Asserted   | $P_A$       | -45         |      |      | dBm  |      |
| Loss of Signal - Deasserted | $P_D$       | $P_A + 0.5$ |      | -31  | dBm  |      |
| Loss of Signal - Hysteresis | $P_D - P_A$ | 0.5         |      | 4    | dB   |      |


#### Notes:

1. Measured average power coupled into 9/125 $\mu$ m single mode fiber.
2. Measured with  $2^{23}-1$  PRBS at BER<10<sup>-10</sup> and 155Mbps.

### TIMING CHARACTERISTICS

| PARAMETER                                       | SYMBOL          | MIN | TYP. | MAX | UNIT    | NOTE |
|-------------------------------------------------|-----------------|-----|------|-----|---------|------|
| TX_DISABLE Assert Time                          | $t_{off}$       |     |      | 10  | $\mu$ s |      |
| TX_DISABLE Negate Time                          | $t_{on}$        |     |      | 1   | ms      |      |
| Time to initialize, include reset of TX_FAULT   | $t_{init}$      |     |      | 300 | ms      |      |
| TX_FAULT from fault to assertion                | $t_{fault}$     |     |      | 100 | $\mu$ s |      |
| TX_DISABLE time to start reset                  | $t_{reset}$     | 10  |      |     | $\mu$ s |      |
| Receiver Loss of Signal Assert Time (off to on) | $t_{A,RX\_LOS}$ |     |      | 100 | $\mu$ s |      |
| Receiver Loss of Signal Assert Time (on to off) | $t_{D,RX\_LOS}$ |     |      | 100 | $\mu$ s |      |


### BLOCK DIAGRAM OF TRANSCEIVER

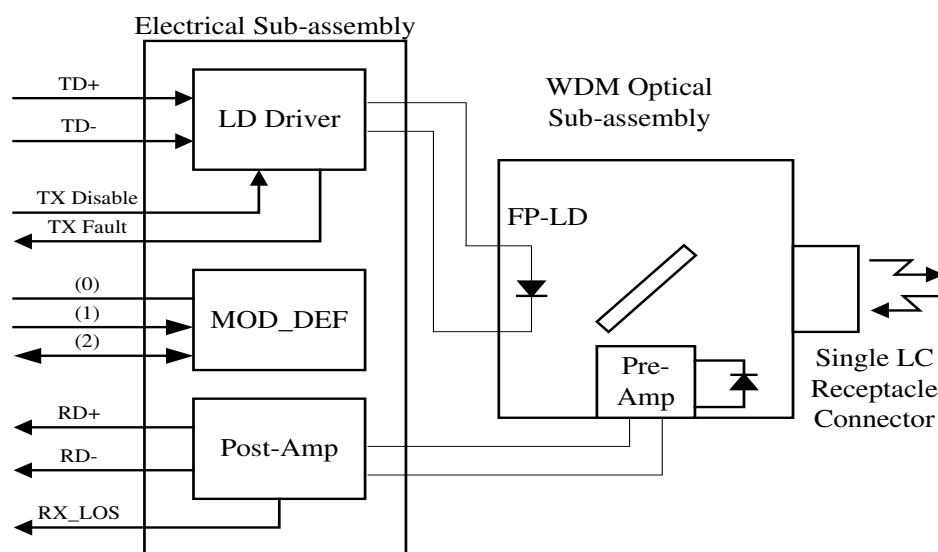


**antaira™**

## SFP-100WA20 100BASE-BX-ONU Transceiver

### PIN OUT DIAGRAM OF TRANSCEIVER

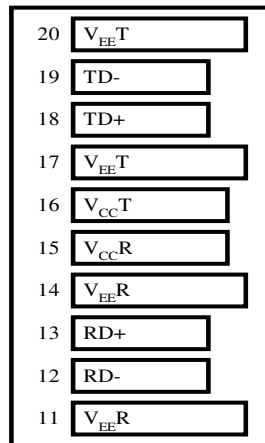

Top of Board

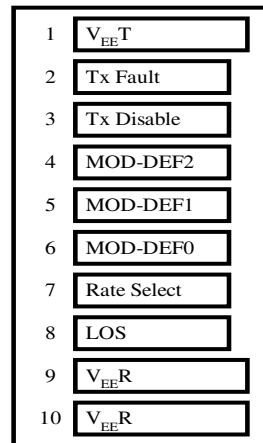

Bottom of Board (As Viewed  
through Top of Board)


### PIN OUT TABLE

| Pin | Symbol      | Functional Description                                |
|-----|-------------|-------------------------------------------------------|
| 1   | VeeT        | Transmitter Ground                                    |
| 2   | TX Fault    | Transmitter Fault Indication                          |
| 3   | TX Disable  | Transmitter Disable – Module disables on high or open |
| 4   | MOD-DEF(2)  | Module Definition 2 – Two wire serial ID interface    |
| 5   | MOD-DEF(1)  | Module Definition 1 – Two wire serial ID interface    |
| 6   | MOD-DEF(0)  | Module Definition 0 – Grounded in module              |
| 7   | Rate Select | Not Connected                                         |
| 8   | LOS         | Loss of Signal                                        |
| 9   | VeeR        | Receiver Ground                                       |
| 10  | VeeR        | Receiver Ground                                       |
| 11  | VeeR        | Receiver Ground                                       |
| 12  | RD-         | Inverse Received Data Out                             |
| 13  | RD+         | Received Data Out                                     |
| 14  | VeeR        | Receiver Ground                                       |
| 15  | VccR        | Receiver Power                                        |
| 16  | VccT        | Transmitter Power                                     |
| 17  | VeeT        | Transmitter Ground                                    |
| 18  | TD+         | Transmitter Data In                                   |
| 19  | TD-         | Inverse Transmitter Data In                           |
| 20  | VeeT        | Transmitter Ground                                    |

**antaira**<sup>TM</sup>


## SFP-100WA20 100BASE-BX-ONU Transceiver

### RECOMMENDED CIRCUIT SCHEMATIC

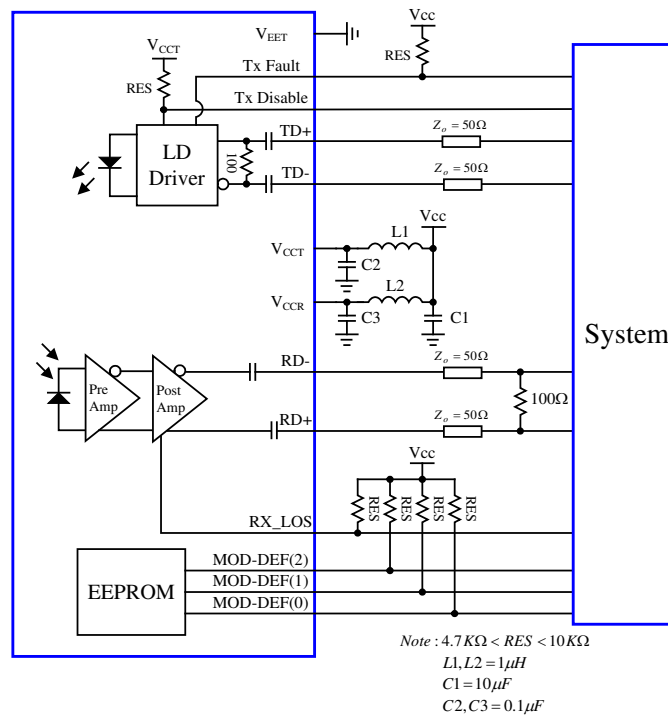

### MECHANICAL DIMENSIONS

Units in mm

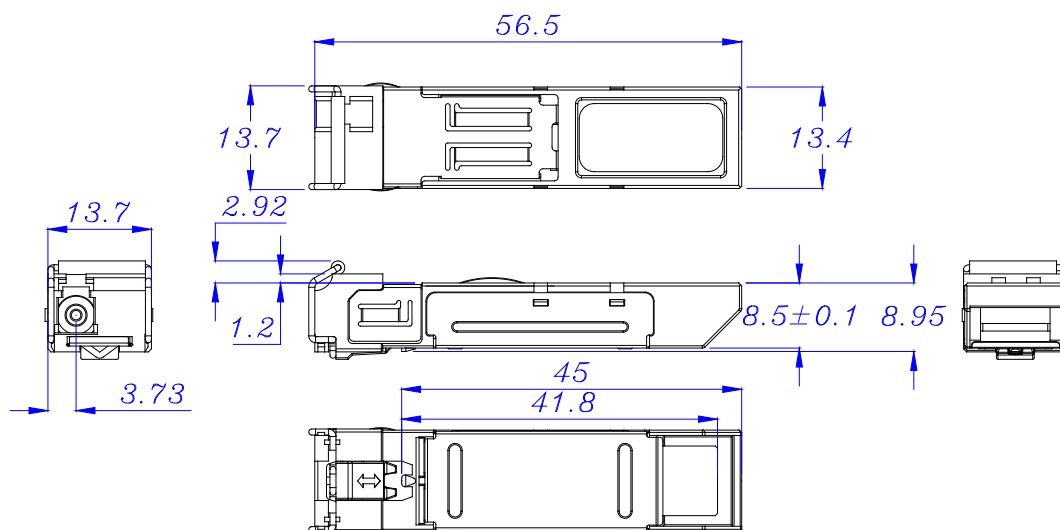

All dimensions are  $\pm 0.2\text{mm}$  unless otherwise specified.

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660