

## SFP-C1-TAA

1000BASE-T Copper Ethernet SFP Transceiver, 0°C ~ 70°C, TAA Compliant



### FEATURES


- ▶ Up to 1.25Gb/s bi-directional data links
- ▶ Hot-pluggable SFP footprint
- ▶ Extended temperature range (0°C to 70°C)
- ▶ Metallic enclosure for low EMI
- ▶ Low power dissipation (1.05W typical)
- ▶ Compact RJ45 connector assembly
- ▶ Access to physical layer IC via 2-wire serial bus
- ▶ 10/100/1000Mbps compliant in host systems with SGMII interface
- ▶ Trade Agreements Act (TAA) compliant
- ▶ 5-Year Warranty



### INTRODUCTION

Antaira Technologies' SFP-C1-TAA Copper Small Form Pluggable (SFP) transceivers are a high performance, cost effective module compliant with the Gigabit Ethernet and 1000BASE-T standards as specified in IEEE 802.3-2002 and IEEE 802.3ab, which supports 1000 Mbps data-rate up to 100 meters over unshielded twisted-pair category 5 cable. The module supports 1000 Mbps full duplex data-links with 5-level Pulse Amplitude Modulation (PAM) signals. All four pairs in the cable are used with a 250Mbps signal rate on each pair. The module provides standard serial ID information compliant with SFP MSA, which can be accessed by the address of A0h via the 2 wire serial CMOS EEPROM protocol. The physical IC can also be accessed via a 2 wire serial bus at address A0h. These SFP transceivers are Trade Agreements Act (TAA) compliant.

### DIMENSIONS

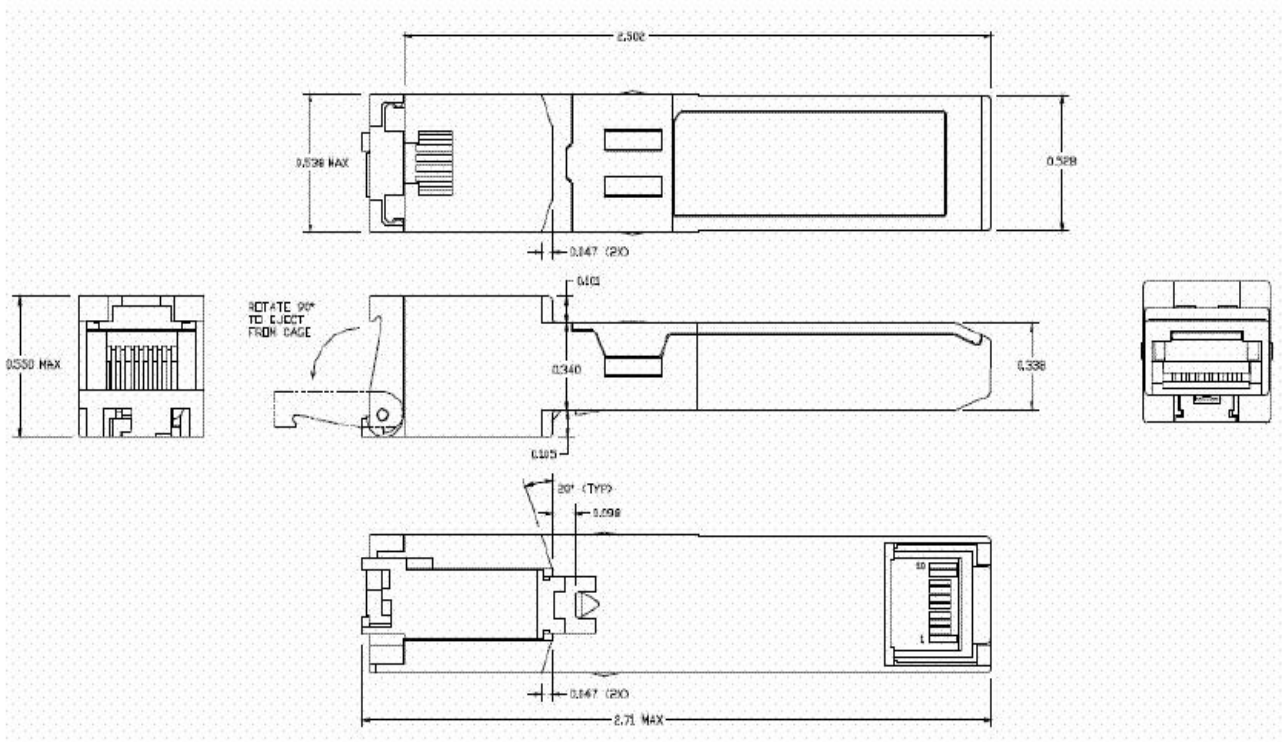

## ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	NOTES/CONDITION
Operating Temperature	Top	0		70	°C	Case temperature
Storage Temperature	Tsto	-40		85	°C	Ambient temperature

## GENERAL SPECIFICATION

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	NOTES/CONDITION
Data Rate	BR	10		1,000	Mb/sec	IEEE 802.3 compatible See Notes 2 through 4 below
Cable Length	L			100	m	Category 5 UTP. BER <10 <sup>-12</sup>

### Notes:

1. Clock tolerance is +/- 50 ppm
2. By default, the SFP-C1-TAA is a full duplex device in preferred master mode.
3. Automatic crossover detection is enabled. External crossover cable is not required.
4. 1000BASE-T operation requires the host system to have an SGMII interface with no clocks, and the module PHY to be configured.

## +3.3V VOLT ELECTRICAL POWER INTERFACE

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	NOTES/CONDITION
Supply Current	Is		320	375	mA	1.2W max power over full range of voltage and temperature. See caution note below
Input Voltage	Vcc	3.13	3.3	3.47	V	Referenced to GND
Maximum Voltage	Vmax			4	V	
Surge Current	Isurge			30	mA	Hot plug above steady state current. See caution note below

**Caution:** Power consumption and surge current are higher than the specified values in the SFP MSA

## LOW-SPEED SIGNALS (ELECTRONIC CHARACTERISTICS)

MOD\_DEF(1) (SCL) and MOD\_DEF(2) (SDA), are open drain CMOS signals (see section VII, "Serial Communication Protocol"). Both MOD\_DEF(1) and MOD\_DEF(2) must be pulled up to host\_Vcc.

PARAMETER	SYMBOL	MIN	MAX	UNIT	NOTES/CONDITION
SFP Output LOW	VOL	0	0.5	V	4.7k to 10k pull-up to host_Vcc, measured at host side of connector
SFP Output HIGH	VOH	host_Vcc - 0.5	host_Vcc + 0.3	V	4.7k to 10k pull-up to host_Vcc, measured at host side of connector
SFP Input LOW	VIL	0	0.8	V	4.7k to 10k pull-up to Vcc, measured at SFP side connector

SFP Input HIGH	VIH	2	Vcc + 0.3	V	4.7k to 10k pull-up to Vcc, measured at SFP side connector
----------------	-----	---	-----------	---	------------------------------------------------------------

## HIGH-SPEED ELECTRICAL INTERFACE (TRANSMISSION LINE-SFP)


All high-speed signals are AC-coupled internally.

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	NOTES/CONDITION
Line Frequency	fL		125		MHz	5-level encoding, per IEEE 802.3
Tx Output Impedance	Zout,TX		100		Ohm	Differential, for all Frequencies between 1MHz and 125MHz
Rx Input Impedance	Zin,RX		100		Ohm	Differential, for all Frequencies between 1MHz and 125MHz

## HIGH-SPEED ELECTRICAL INTERFACE (HOST-SFP)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	NOTES/CONDITION
Single ended data input swing	Vinsing	250		1200	mV	Single ended
Single ended data output swing	Voutsing	350		800	mV	Single ended
Rise/Fall Time	Tr,Tf		175		psec	20%-80%
Tx Input Impedance	Zin		50		Ohm	Single ended
Rx Output Impedance	Zout		50		Ohm	Single ended

## PIN ASSIGNMENT

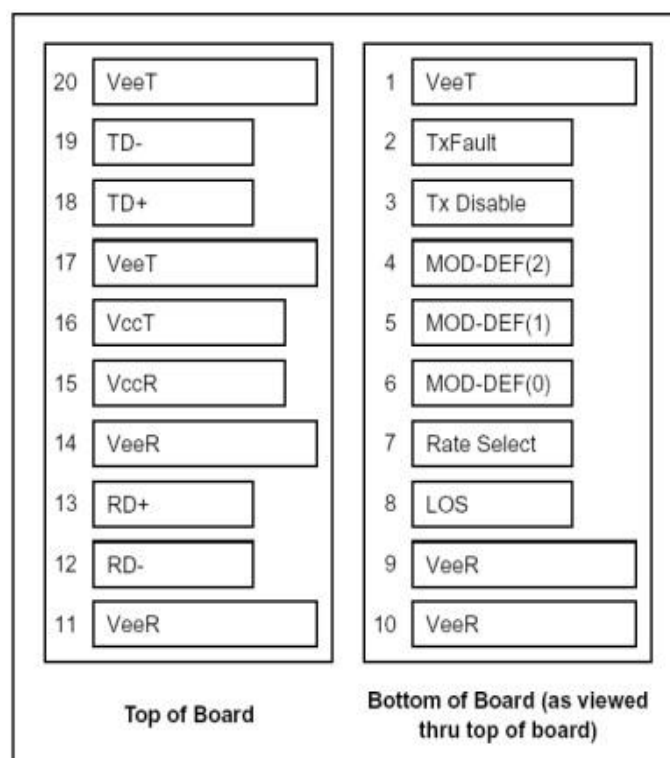

## PIN DESCRIPTIONS

PIN	SIGNAL NAME	DESCRIPTION	PLUG SEQ.	NOTE
1	VEET	Transmitter Ground	1	
2	TX FAULT	Transmitter Fault Indication	3	Note 1
3	TX DISABLE	Transmitter Disable	3	Note 2
4	MOD_DEF(2)	SDA Serial Data Signal	3	Note 3
5	MOD_DEF(1)	SCL Serial Clock Signal	3	Note 3
6	MOD_DEF(0)	TTL Low	3	Note 3
7	Rate Select	Not Connected	3	
8	LOS	Loss of Signal	3	Note 4
9	VEER	Receiver Ground	1	
10	VEER	Receiver Ground	1	
11	VEER	Receiver Ground	1	
12	RX-	Inv. Received Data Out	3	Note 5
13	RX+	Received Data Out	3	Note 5
14	VEER	Receiver Ground	1	
15	VCCR	Receiver Power Supply	2	
16	VcCT	Transmitter Power Supply	2	
17	VEET	Transmitter Ground	1	
18	TX+	Transmit Data In	3	Note 6
19	TX-	Inv. Transmit Data In	3	Note 6
20	VEET	Transmitter Ground	1	

### Notes:

Plug Seq.: Pin engagement sequence during hot plugging.

- TX Fault is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor on the host board to a voltage between 2.0V and Vcc+0.3V. Logic 0 indicates normal operation; logic 1 indicates a laser fault of some kind. In the low state, the output will be pulled to less than 0.8V.
- TX Disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7 kΩ 10 K resistor. Its states are:
 

Low (0 to 0.8V):	Transmitter on
(>0.8, < 2.0V):	Undefined
High (2.0 to 3.465V):	Transmitter Disabled
Open:	Transmitter Disabled
- Mod-Def 0,1,2. These are the module definition pins. They should be pulled up with a 4.7K to 10K resistor on the host board. The pull-up voltage shall be VccT or VccR  
Mod-Def 0 is grounded by the module to indicate that the module is present

Mod-Def 1 is the clock line of two wire serial interface for serial ID

Mod-Def 2 is the data line of two wire serial interface for serial ID

4. LOS (Loss of Signal) is an open collector/drain output, which should be pulled up with a 4.7K to 10K resistor. Pull up voltage between 2.0V and  $V_{ccT}$ ,  $R+0.3V$ . When high, this output indicates the received optical power is below the worst-case receiver sensitivity (as defined by the standard in use). Low indicates normal operation. In the low state, the output will be pulled to  $<0.8V$ .
5. RD-/+ : These are the differential receiver outputs. They are AC coupled 100 differential lines which should be terminated with 100 (differential).
6. TD-/+ : These are the differential transmitter inputs. They are AC-coupled, differential lines with 100 differential termination inside the module.

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660