

PRELIMINARY

DO SERIES

DO861LR4

86" 3500 nits 4K UHD Waterproof
Outdoor Ultra-High Brightness Digital Signage Display



**SUNLIGHT
VIEWABLE IMAGE**



**VANDAL
RESISTANT**



**VIEWABLE WITH
POLARIZED LENSES**



**WEATHER
PROOF**



**4K UHD
RESOLUTION**

Android is a trademark of Google LLC.
The Android robot is reproduced or modified from work created and shared by Google and used according to terms described in the Creative Commons 3.0 Attribution License.

Intel is a trademark of Intel Corporation or its subsidiaries.
Intel® SDM not included.

FOR MORE INFORMATION

For more information about DynaScan, visit our website at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.


DynaScan

V0.06

SPECIFICATION

MODEL	DO861LR4	
PANEL	LCD Panel Size	85.6 inches LCD
	Native Resolution	3840 x 2160
	Brightness	3,500 nits
	Color Depth	10 bits
	Contrast Ratio	3000 : 1
	Response Time (Typ.)	8 ms
	Viewing Angle	178° / 178°
	Light Lifetime (Typ.)	100,000 hrs
POWER	Blackening Defect Free	Up to 110°C (230°F)
	Polarized Sunglasses Support	Yes
	Power Supply	Internal
MECHANICAL SPECS	Rated Voltage	200-240V ~ 50/60Hz
	Power Consumption (Typ./ Max.)	1000 W / 1500 W
	AC Out	< 100 W
FEATURE	Bezel Width (T/B/L/R)	Even Bezel 68.0 mm
	Cabinet Color	Black
	Monitor Dimension (LxHxD)	2035.0 x 1205.0 x 155.0 mm
	Monitor Weight	222 kg
	Orientation	Portrait / Landscape
	Mounting (LxH)	1500 x 440 ; 1500 x 500 mm
	Carrying Handles	Yes
	Language	English
EXPANSION SLOT FOR INTEL® SDM	Support SNMP (Up to V3.0)	Yes
	Image Retention Protection	Yes
	Auto Orientation Sensor	Yes
INPUT	Ambient Light Sensor	Yes
	Power On/Off Scheduling	Yes
	OSD Menu Rotation	Yes
OUTPUT	SDM Slot	SDM-S (support with DynaScan extended board) & SDM-L Compatible
	Power Support	Up to 45 W
	HDMI 2.1d (HDCP 2.3)	x2 (2160p)
EXTERNAL CONTROL	DisplayPort 1.2	x1
	USB 3.0	x1
	Micro SD Slot	x1
INTERNAL PLAYER	Audio	x1
	RS-232	In x1
	RJ-45	x2 (LAN)
ENVIRONMENT	Operating System	Android™ 8.0.0
	Processor	Dual-core A73 and dual-core A53
	Clock Speed	1.5GHz
	Main Memory Interface	DDR4, 2G
	Graphics	Quad-core MaliG51
	Storage	Internal: 16GB eMMC Flash External: Support Micro SD , 128GB(FAT32)
	Multimedia	4K 10bits VP9/H265/H264 video decoders, up to 60fps 1080P other video decoders (VC-1, MPEG-1/2/4, VP8)
	Operating Temperature	-30°~ 50° C
CERTIFICATION	Storage Temperature	-20°~ 60° C
	Humidity	10% ~ 100% RH Non-condensing
	Water and Dust resistant design	IP56



INTERFACE

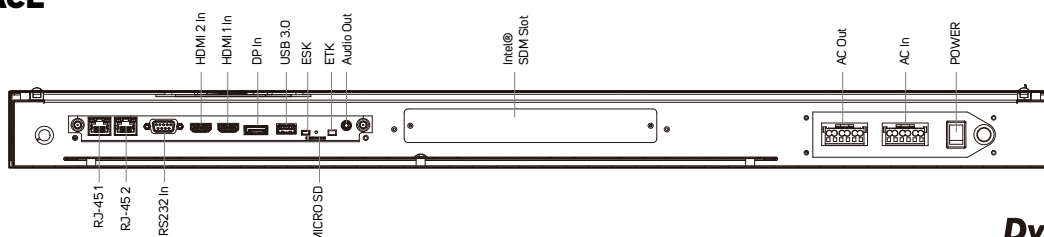

DIMENSIONS

PRELIMINARY

Unit: mm [inch]

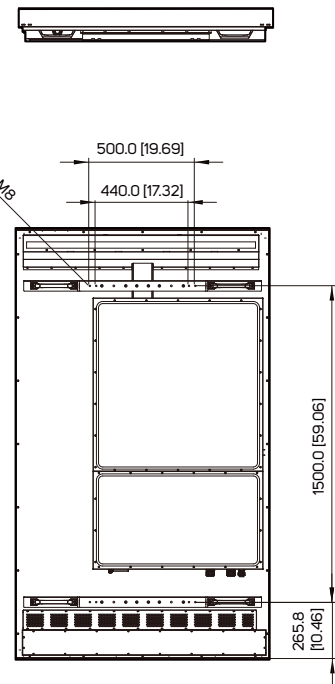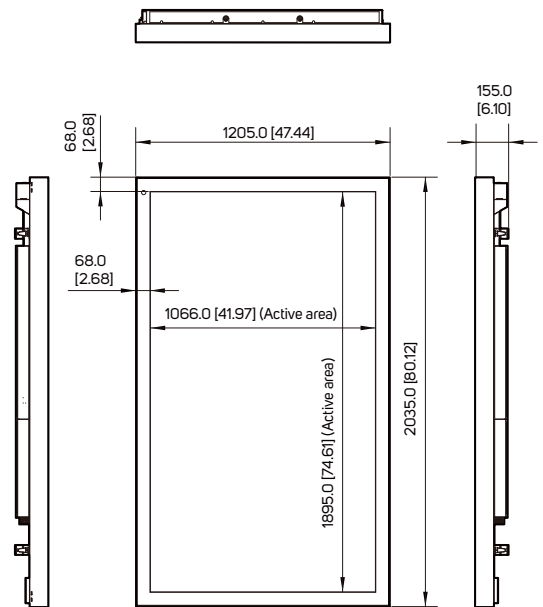

DynaScan

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660