


EPBC 2000

Intel® Amston Lake Atom® Ultra-Slim
2.5" Pico-ITX Embedded Single Board Computer



▲ UAV Data Transmission

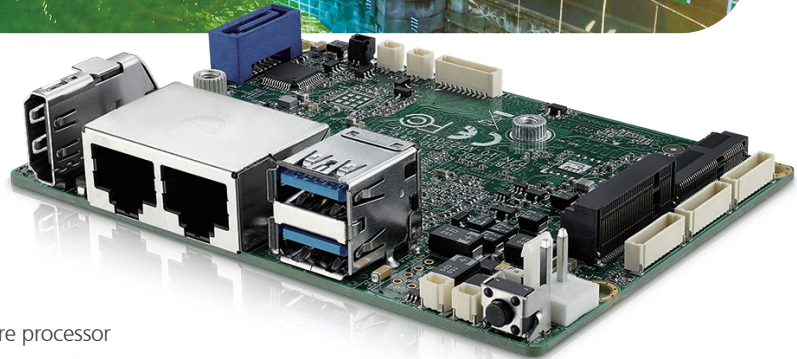

- Intel® Amston Lake Atom® x7211RE dual-core processor delivers notable improvements in CPU and GPU performance
- Small form factor, ultra-compact design
- Fanless, -40°C to 70°C Operating Temperature
- 2 2.5 GigE LAN, 2 USB 3.2, 2 COM, M.2 Key B
- HDMI 2.0 support up to 4K @60Hz resolution
- SIM Socket for WiFi/4G/5G/LTE/GPRS/UMTS
- Optional VHub One-Stop AIoT Solution Service supports OpenVINO based AI accelerator and advanced Edge AI applications

▼ Education Assistive Technology



▲ Intelligent Control

intel
partner
Gold
IoT Solutions



Vecow

Specifications

System

Processor	Intel® Amston Lake Atom® x7211RE
Chipset	Intel® SoC
BIOS	AMI
SIO	IT8659E
Memory	1 DDR5 4800MHz SO-DIMM, up to 16GB, In-band ECC
OS	Windows 11, Windows 10, Linux

I/O Interface

Front I/O	- 2 RJ45 2.5G LAN - 2 USB 3.2 Gen 2 - 1 HDMI 2.0 - 1 SIM Card Socket - 1 Power button - 1 Reset button - 1 Power LED - 1 HDD LED - 1 WLAN LED - 1 WWAN LED
Internal I/O	- 1 DDR5 SO-DIMM Socket - 1 M.2 Key B Connector (2280/3042/3052, PCIe2/USB3/default USB2) - 1 M.2 Key E Connector (2230, PCIe1/USB2) - 1 SATA Data Connector - 1 SATA Power Connector - 1 DC-IN Connector - 2 COM Header (RS-232/422/485) - 1 10-pin USB 2.0 x2 Header - 1 10-pin GPIO header - 1 Audio Mic in and Line out Header - 1 power LED header - 1 storage LED header - 1 Reset Header - 1 Clear CMOS Header

Expansion

M.2	- 1 M.2 Key B (2280/3042/3052, PCIe2/USB3/default USB2) - 1 M.2 Key E (2230, PCIe1/USB2)
-----	---

Graphics

Graphics Processor	Intel® UHD Graphics
Interface	1 HDMI2.0: Up to 4096 x 2160 @60Hz

Storage

SATA	1 SATA III (6Gbps)
M.2	1 M.2 Key B (2280/3042/3052, PCIe2, share with expansion)

Ethernet

LAN 1	Realtek® RTL8125BI-CG 2.5G LAN
LAN 2	Realtek® RTL8125BI-CG 2.5G LAN

Power

Power Input	12V DC-in
Power Interface	2-pin : V-, V+

Others

Watchdog Timer	Reset: 1 to 255 sec./min. Per Step
Smart Management	Wake on LAN, PXE supported
HW Monitor	Monitoring temperature, voltages. Auto throttling control when CPU overheats.

Mechanical

Dimensions	100.0mm x 72.0mm (9.34" x 2.83")
------------	----------------------------------

Environment

Operating Temperature	-40°C to 70°C with air flow
Storage Temperature	-40°C to 85°C
Humidity	5% to 95% Humidity, Non-condensing
Relative Humidity	95% at 70°C
EMC	CE, FCC, ICES

Packing List

EPBC-2000	x1
Cable Kit	
- COM Port Cable	x2
- SATA Data Cable	x1
- SATA Power Cable	x1
- USB 2.0 Cable	x1
- Audio Cable	x1

Order Information

Model	2.5 GigE LAN	USB 3.2	HDMI 2.0	SIM	COM
EPBC-2000	2	2	1	1	2

Optional Software




VHub AI Developer	AI Development Kit
VHub ROS	AMR Development Kit
VHub EtherCAT	I/O Control Platform

Accessories

62-M010026-S0A	Heat sink for EPBC-2000
61-13Q1009-0DA	COM Port Cable
61-1470022-005	PBC-1000/2000 SATA Power Cable
61-13B0707-3BA	PBC-1000/2000 SATA data cable
61-193102U-156	USB 2.0 Cable
61-1300024-39A	Audio Cable

Dimensions & Drawing

Unit : mm (inch)

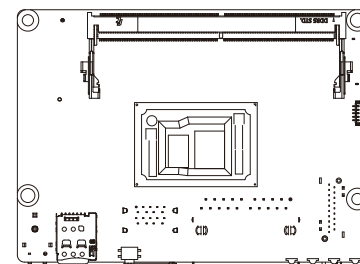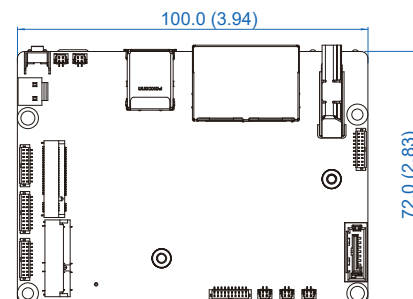

* All product information may subject to change without prior notice.
 * The rights of all brand names, product names and trademarks belong to their respective owners.
 Copyright © 2025 Vecow Co., Ltd. All rights reserved.

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660