

Modbus / TCP Remote Digital I/O Module

RIO-2018



Features

- Remote thermocouple input module with web access AJAX and Modbus / TCP
- 1 x 10/100Mbps Ethernet port
- 3 channels J or K type thermocouple input with cold junction compensation
- 2 x 5000Vrms isolated digital input (bipolar input photocoupler)
- 1 x Form C relay with contact rating 30VDC@1A or 125VAC@0.5A
- Support web-based temperature monitoring and DIO control
- Optional DIN RAIL mounting kit (DK-35A)
- Windows configuration utility included

H/W Specifications

CPU / Memory

- CPU: NXP Arm Cortex-M3 LPC1768 100MHz
- Memory: 512KB on-chip Flash, 64KB SRAM

Network Interface

- Type: 1 x 10/100Mbps Ethernet, RJ45 connector
- Protection: 1.5KV magnetic isolation
- Protocol: Modbus / TCP, UDP, HTTP, DHCP

Thermocouple Input

- J type: Maxim MAX31855J converter with CJC
Range: -210°C~+1200°C
- K type: Maxim MAX31855K converter with CJC
Range: -200°C~+1350°C
- Resolution: 14-bit, 0.25°C
- Connector: OMEGA PCC-SMP Thermocouple connector
Thermocouple fault detection

Relay Output

- No. of Channels: 1 x Form C
- Contact Rating: 30VDC@1A or 125VAC@0.5A

Isolated Digital Input

- No. of Channels: 2
- Logic High: 5~24VDC
- Logic Low: 0~1.5VDC
- Opto-Isolation: 5000Vrms
- Response Time: 20µs

General


- Power Input: +9~+48VDC (Terminal Block)
- Protection: Auto polarity and surge protect
- Dimensions (W x H x D): 78 x 108 x 24mm (3. (3.0x4.25x0.94in))

Front View




Thermocouple Input

- The thermocouple input is connected to MAX31855 Cold Junction Compensated Thermocouple to Digital Converter. The connector is OMEGA PCC-SMP. Please make sure the type of thermocouple matches the model of RIO-2018. Please refer to datasheet of MAX31855
- for the technical specification of thermocouple measurement.

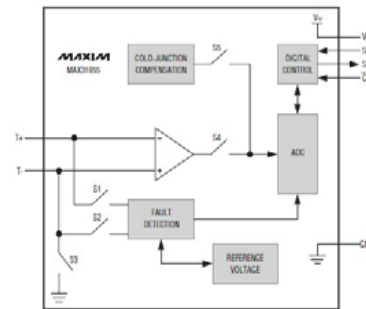

Thermocouple

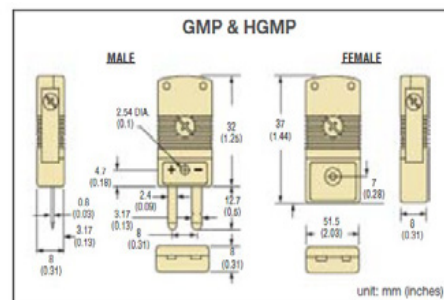

The following two items are available from www.omega.com.

- J type Thermocouple: 5SRTC-GG-J-24-36
- K type Thermocouple: 5SRTC-GG-K-24-36

Ordering Information

RIO-2018J

- Analog Input Remote I/O Module with J type Thermocouple input channel

RIO-2018K

- Analog Input Remote I/O Module with K type Thermocouple input channel

DK-35A (36-DK35A-000)

- DIN RAIL Mounting Kit

PWR-12V-1A

- 100~240VAC to 12VDC 1A Power Adapter

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660