

GPU Computing



Nuvo-9160GC Series

Ruggedized AI Inference Platform supporting 130W NVIDIA® RTX GPU and Intel® 13th/ 12th-Gen Core™ Processor



Key Features

- Supports Intel® 13th/ 12th-Gen Core™ up to 24C/ 32T 35W/ 65W CPU
- Support NVIDIA® RTX series GPU card up to 130W TDP
- -25°C to 60°C wide temperature rugged operation
- 5x 2.5GbE and 1xGbE with optional PoE+ (ports 3~6)
- 1x USB 3.2 Gen2x2 type-C and 6x USB 3.2 type-A ports
- M.2 2280 M key socket (Gen4x4) supporting NVMe SSD
- Accommodates two 2.5" SATA HDD/ SSD with RAID 0/ 1 support
- MezzIO® interface for add-on expansion

Contact Neosys

Get Quote

*R.O.C Patent No. M534371/ M456527

Introduction

Nuvo-9160GC is a rugged edge AI computer that delivers superior CPU and GPU performance by leveraging Intel's 13th/12th Gen platform and an NVIDIA® RTX GPU card up to 130W. The system's standard and optional GPU brackets can accommodate selected GPU cards including RTX 3050, RTX 4060, NVIDIA® RTX A2000, and RTX 4000 SFF Ada. The GPU bracket is designed to secure the GPU card to provide excellent shock and vibration resistance in volatile conditions.

Benefiting from the cutting-edge Intel® 7 photolithography, Intel®'s 13th/12th Gen processors offer up to 24 cores/ 32 threads to provide up to double the performance when compared to previous Intel® 11th/ 10th Gen CPUs. The latest NVIDIA® 130W RTX GPU contributes up to 15 TFLOPs of FP32 performance to fuel real-time AI inference applications involving multiple cameras such as production line vision inspection, intelligent video analytics for surveillance or ITS, or autonomous mobile robot (AMR).

Nuvo-9160GC has a proven thermal design to guarantee reliable system operation from -25°C to 60°C. It features a passive-cooling design for the motherboard and segregated patented ventilation design* for the 130W GPU card within Neosys' patented expansion Cassette*. The support of six GigE cameras (or IP cameras) and six USB3 cameras makes Nuvo-9160GC ideal for various vision-based AI application deployments. It also provides flexible data storage options, including one M.2 2280 Gen4x4 NVMe providing up to 7000 MB/s extreme read/write speeds and two 2.5" SATA HDD/SSD to expand storage capacity.

With performance enhancements and comprehensive I/Os, Nuvo-9160GC is the perfect edge AI inference platform for industrial environments from factory automation, smart agriculture, and autonomous machines.

Specifications

System Core		Expansion Bus		
Processor	Supporting Intel® 13th-Gen-Core™ CPU (LGA1700 socket, 65W/ 35W TDP)	PCI Express	1x PCIe x16 slot@Gen3, 16-lanes PCIe signals in Cassette for installing an NVIDIA® graphics card up to 130W TDP (Max. graphics card dimension is 188 mm(L) x 131 mm(W), dual slot allocation)	
	- Intel® Core™ i9-13900E/ i9-13900TE			
	- Intel® Core™ i7-13700E/ i7-13700TE			
	- Intel® Core™ i5-13500E/ i5-13400E/ i5-13500TE			
	- Intel® Core™ i3-13100E/ i3-13100TE			
Chipset	Supporting Intel® 12th-Gen-Core™ CPU (LGA1700 socket, 65W/ 35W TDP)	Mini PCI Express	1x full-size mini PCI Express socket	
	- Intel® Core™ i9-12900E/ i9-12900TE			
	- Intel® Core™ i7-12700E/ i7-12700TE			
	- Intel® Core™ i5-12500E/ i5-12500TE			
	- Intel® Core™ i3-12100E/ i3-12100TE			
Graphics	Integrated Intel® G7400E/ G7400TE	M.2	1x M.2 3042/3052 B key socket with SIM slot for M.2 4G/ 5G module	
	- Intel® Pentium® G7400E/ G7400TE			
	- Intel® Celeron® G6900E/ G6900TE			
Memory	Up to 64 GB DDR5 4800 SDRAM (two SODIMM slots)	Expandable I/O	1x MeziO® expansion port for Neosys MeziO® modules	
AMT	Supports Intel vPro/ AMT 16.0	Power Supply		
TPM	Supports dTPM 2.0	DC Input	1x 3-pin pluggable terminal block for 8 to 48V DC input	
I/O Interface		Remote Ctrl. & LED Output	1x 3-pin pluggable terminal block for remote control and PWR LED output	
Ethernet	5x 2.5G Ethernet by I225-IT and 1x Gigabit Ethernet by I219-LM with screw-lock		Mechanical	
PoE+	Optional IEEE 802.3at PoE+ PSE for Port 3 ~ Port 6. 100W total power budget	Dimension	240 mm (W) x 225 mm (D) x 110.5 mm (H)	
USB 3.2	1x USB 3.2 Gen2x2 (20 Gbps) port in type-C connector with screw-lock	Weight	3.89 kg	
	4x USB 3.2 Gen2x1 (10 Gbps) ports in type-A connectors			
	2x USB 3.2 Gen1x1 (5 Gbps) ports in type-A connectors			
USB 2.0	2x USB 2.0 ports	Mounting	Wall-mount (standard) or damping bracket (optional)	
Video Port (Integrated Graphics)	1x VGA connector, supporting 1920 x 1200 resolution	Environmental		
	1x DVI-D connector, supporting 1920 x 1200 resolution			
	1x DisplayPort connector, supporting 4096 x 2304 resolution			
Serial Port	2x software-programmable RS-232/ 422/ 485 ports (COM1/COM2)	Operating Temperature	With 35W CPU and 130W GPU	
	2x RS-232 ports (COM3/COM4)			
Audio	1x 3.5 mm jack for mic-in and speaker-out	Storage Temperature	-25°C to 60°C**	
Storage Interface		Humidity	With 65W CPU and 130W GPU	
SATA HDD	2x internal SATA port for 2.5" HDD/ SSD installation, supporting RAID 0/ 1			
M.2	1x M.2 2280 M key socket (PCIe Gen4 x4) for NVMe SSD	Vibration	-25°C to 60°C**/** (configured as 35W TDP)	
		Shock	-25°C to 50°C**/** (configured as 65W TDP)	
		EMC	Operating, MIL-STD-810G, Method 514.6, Category 4 (with optional damping bracket)	
		CE/FCC Class A, according to EN 55032 & EN 55035	Operating, MIL-STD-810G, Method 516.6, Procedure I, Table 516.6-II (with optional damping bracket)	

* Due to I225-IT specification limitation, for systems running 2.5G Ethernet link speeds, please limit the operating temperature to 60°C.

** For sub-zero operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.

* Due to I225-IT specification limitation, for systems running 2.5G Ethernet link speeds, please limit the operating temperature to 60°C.

** For sub-zero operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.

*** For CPU operating at 65W mode, the highest operating temperature shall be limited to 50°C and thermal throttling may occur when sustained full-loading applied. Users can configure CPU power in BIOS to allow higher operating temperature.


All rights reserved. Copyright© 2023 Neosys Technology Inc.

Last updated: 16 - Oct 2023


Nuvo-9160GC



Appearance

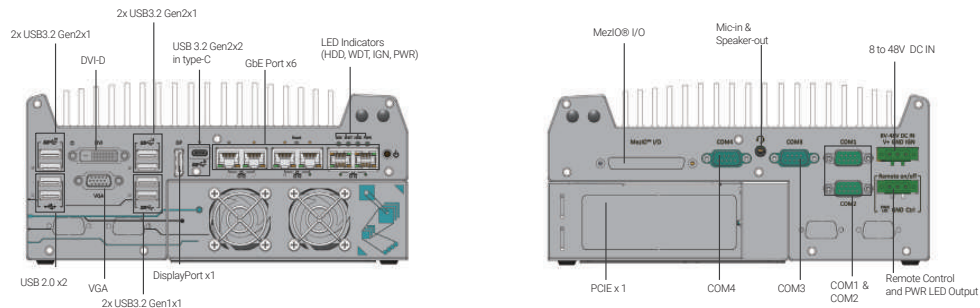

Dimensions

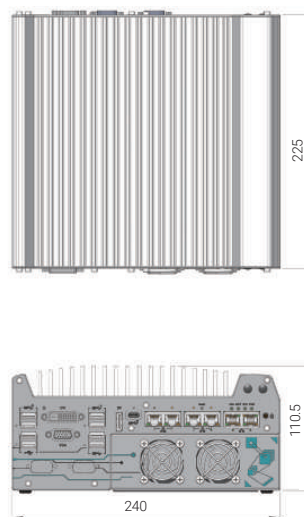

Ordering Information

Model No.	Product Description
Nuvo-9160GC	Ruggedized AI Inference Platform supporting 130W NVIDIA® RTX GPU and Intel® 13th/ 12th-Gen Core™ Processor
PoE+ Option	Option of 802.3at PoE + PSE for 2.5GbE port 3 ~ port 6

Optional Accessories

Dmpbr-Nuvo9160	Neusys' patented damping brackets assembly for Nuvo-9160GC
Gpubr-Nuvo9160-01	Nuvo-9160GC GPU bracket kit for RTX 4000 SFF Ada and RTX A2000
Gpubr-Nuvo9160-02	Nuvo-9160GC GPU bracket kit for selected single fan RTX 4060
PA-280W-ET2	280W AC/DC power adapter 24V/11.67A; 16AWG/100cm; cord end terminals for terminal block, operating temperature : -30°C to 60°C.
PA-600W-ENC	600W AC/DC power adapter 24V/25A; cord end terminals for terminal block, operating temperature : -20°C to 70°C.
MeziO® Modules	
MeziO®-C180-50	MeziO® module with 4x RS-232/ 422/ 485 ports and 4x RS-232 ports
MeziO®-C181-50	MeziO® module with 4x RS-232/ 422/ 485 ports and 4x RS-422/ 485 ports
MeziO®-D220-50	MeziO® module with 8-CH isolated digital input and 8-CH isolated digital output
MeziO®-D230-50	MeziO® module with 16-CH isolated digital input and 16-CH isolated digital output
MeziO®-V20-EP	MeziO® module with ignition power control function for in-vehicle application
MeziO®-U4-50	MeziO® module with 4x USB 3.1 ports
MeziO®-G4	MeziO® module with 4x GigE ports
MeziO®-G4P	MeziO® module with 4x IEEE 802.3at PoE+ ports

Only Nuvo-9160GC-PoE support MeziO-G4P

All specifications and photos are subject to change without prior notice

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660