

In-vehicle Computing



# Nuvo-9200VTC Series

Intel® 13th/ 12th-Gen Core™ in-vehicle controller with 4x M12/ 4x RJ45 / 8x RJ45 PoE+ ports, single-slot PCIe Cassette



## Key Features

- Supports Intel® 13th/12th-Gen Core™ 24C/ 32T 35W/ 65W LGA1700 CPU
- 4x or 8x 802.3at PoE+ ports via M12 or RJ45 connectors
- 1x USB 3.2 Gen2x2 type-C and 8x USB 3.2/ 2.0 type-A ports
- On-board isolated CAN bus for in-vehicle communication
- 4-CH isolated DI and 4-CH isolated DO
- M.2 Gen4 x4 NVMe SSD slot
- 2x hot-swappable SATA HDD trays, supporting RAID 0/ 1
- 8V to 48V wide-range DC input with built-in ignition power control
- Patented Cassette for PCIe add-on card accommodation
- E-Mark certified and EN 50155 EMC compliant



Contact Neosys

Get Quote

\*R.O.C Patent No. M534371/ M456527

## Introduction

Nuvo-9200VTC is Neosys' latest rugged in-vehicle controller based on Intel® 13<sup>th</sup>/ 12<sup>th</sup>-Gen Core™ processors. Benefiting from cutting-edge Intel® 7 photolithography, the latest Core™ desktop processors come with up to 24 cores/ 32 threads, offering an incredible boost of computational performance. Combining DDR5 memory bandwidth throughput and PCIe Gen4 NVMe high-speed disk read/write, users can expect an overall system performance improvement of up to 1.8x when compared to previous 10th or 11th-Gen platforms.

Nuvo-9200VTC offers an assortment of peripherals, connections, and expansion flexibility. It has 2.5Gb and 1Gb Ethernet ports, and four or eight 802.3at PoE+ ports to supply 25W of power to connected devices such as IP cameras. The system also has x-coded M12 connectors and screw-lock mechanisms on I/Os like Ethernet, USB 3.2 Gen1 and USB 3.2 Gen2 to guarantee extreme rugged connectivity in shock/ vibration environments. Internal expansion wise, there are two M.2 and three mini-PCIe sockets to install 5G/ 4G, WiFi, GPS, and CAN module for wireless communication.

On top of all that, the system is E-Mark certified and has a patented Cassette module with an additional PCIe slot for an add-on card, making it that much more flexible for in-vehicle applications. Nuvo-9200VTC also features two hot-swappable SATA HDD trays, an isolated CAN bus for in-vehicle communication, isolated DIO for sensor/ actuator control, 8V to 48V wide-range DC input with ignition power control. The Nuvo-9200VTC series is a flexible and reliable solution for various in-vehicle applications.

## Specifications

System Core		Expansion Bus	
<b>Processor</b>	Supporting Intel® 13th-Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP) - Intel® Core™ i9-13900E/ i9-13900TE - Intel® Core™ i7-13700E/ i7-13700TE - Intel® Core™ i5-13500E/ i5-13400E/ i5-13500TE - Intel® Core™ i3-13100E/ i3-13100TE	Support Intel® 12th-Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP) - Intel® Core™ i9-12900E/ i9-12900TE - Intel® Core™ i7-12700E/ i7-12700TE - Intel® Core™ i5-12500E/ i5-12500TE - Intel® Core™ i3-12100E/ i3-12100TE - Intel® Pentium® G7400E/ G7400TE - Intel® Celeron® G6900E/ G6900TE	<b>PCI/PCI Express</b> 1x PCIe x16 slot@Gen3, 16-lanes PCIe signals in Cassette
<b>Chipset</b>	Intel® Q670E platform controller hub	<b>Mini PCI Express</b> 1x full-size mini-PCIe socket 2x full-size mini-PCIe sockets (USB signals only) with internal SIM sockets	<b>M.2</b> 1x M.2 2242/3052 B key socket with SIM slot for M.2 5G/ 4G module 1x M.2 2242/3052 B key socket with SIM slot for M.2 4G module
<b>Graphics</b>	Integrated Intel® UHD Graphics 770 (32EU)	<b>Power Supply</b>	<b>DC Input</b> 1x 3-pin pluggable terminal block for 8V to 48V DC input (IGN/ GND/ V+)
<b>Memory</b>	Up to 64 GB DDR5 4800 SDRAM (two SODIMM slots)	<b>Ignition Control</b>	Built-in ignition power control
<b>AMT</b>	Supports Intel vPro/ AMT 16.0	<b>Remote Ctrl. &amp; LED Output</b>	1x 3-pin pluggable terminal block for remote control and PWR LED output
<b>TPM</b>	Supports dTPM 2.0	<b>Mechanical</b>	<b>Dimension</b> 240 mm (W) x 225 mm (D) x 103 mm (H)
<b>I/O Interface</b>		<b>Weight</b>	3.9kg
<b>Ethernet port</b>	1x 2.5G Ethernet by I225-IT and 1x Gigabit Ethernet by I219-LM with screw-lock	<b>Mounting</b>	Wall-mount with damping bracket
<b>PoE+</b>	4x IEEE 802.3at Gigabit PoE+ ports by Intel® I210 - M12 X-coded connector (Nuvo-9200VTC) - RJ45 connector (Nuvo-9204VTC) 4x IEEE 802.3at Gigabit PoE+ ports by Intel® I210 and 4x 2.5G PoE+ ports by I225-IT - RJ45 connector (Nuvo-9208VTC)	<b>Environmental</b>	<b>Operating Temperature</b> With 35W CPU -40°C ~ 70°C <sup>[1]</sup> (with 1 memory module installed) -40°C ~ 60°C <sup>[2][3]</sup> (with 2 memory modules installed) With 65W CPU -40°C ~ 50°C <sup>[2][3]</sup> (configured as 65W TDP with 2-slots memory)
<b>USB 3.2</b>	1x USB 3.2 Gen2x2 (20 Gbps) port in type-C connector with screw-lock 4x USB 3.2 Gen2x1 (10 Gbps) ports in type-A connectors 2x USB 3.2 Gen1x1 (5 Gbps) ports in type-A connectors	<b>Storage Temperature</b>	-40°C to 85°C
<b>USB 2.0</b>	2x USB 2.0 ports	<b>Humidity</b>	10% to 90% , non-condensing
<b>CAN Bus</b>	1x isolated CAN 2.0 port	<b>Vibration</b>	MIL-STD-810H, 514.8, Category 4
<b>Video Port (Integrated Graphics)</b>	1x VGA, supporting 1920 x 1200 resolution 1x DVI-D, supporting 1920 x 1200 resolution 1x DisplayPort, supporting 4096 x 2304 resolution	<b>Shock</b>	MIL-STD-810H, 516.8, Procedure I
<b>Serial Port</b>	2x software-programmable RS-232/ 422/ 485 ports (COM1/COM2) 2x RS-232 ports (COM3/COM4)	<b>EMC</b>	E-Mark, EN 50121 (EN 50155 EMC) CE/FCC Class A, according to EN 55032 & EN 55035
<b>Isolated DIO</b>	4-CH isolated DI and 4-CH isolated DO		
<b>Audio</b>	1x 3.5 mm jack for mic-in and speaker-out		
<b>Storage Interface</b>			
<b>SATA HDD</b>	2x hot-swappable HDD trays for 2.5" HDD/ SSD installation, supporting RAID 0/ 1		
<b>M.2</b>	1x M.2 2280 M key socket (PCIe Gen4 x4) for NVMe SSD		

<sup>[1]</sup> Due to high heat generation of DDR5 memory, please configure the CPU to 35W mode and utilize only one memory slot, while operating at a temperature of 70°C.


<sup>[2]</sup> For sub-zero operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.

<sup>[3]</sup> For CPU operating at 65W mode, the highest operating temperature shall be limited to 50°C and thermal throttling may occur when sustained full-loading applied. Users can configure CPU power in BIOS to allow higher operating temperature.




Nuvo-9200VTC Series

**Appearance**

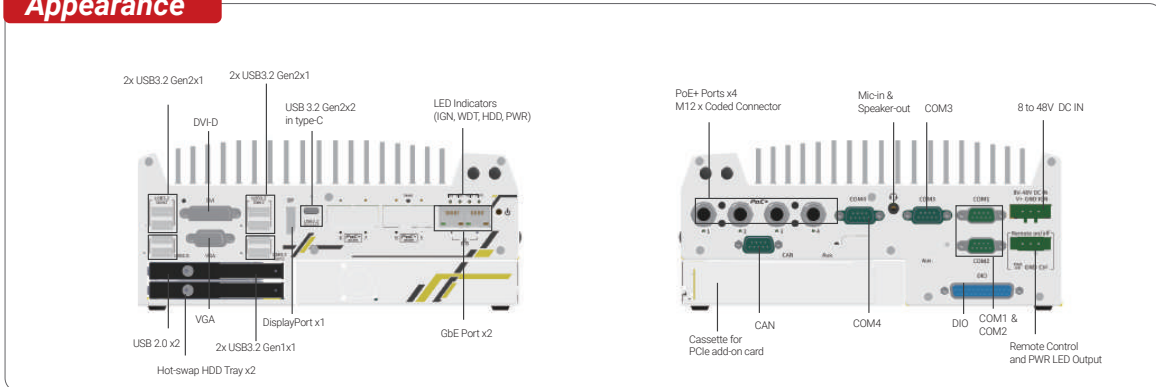

**Dimensions**

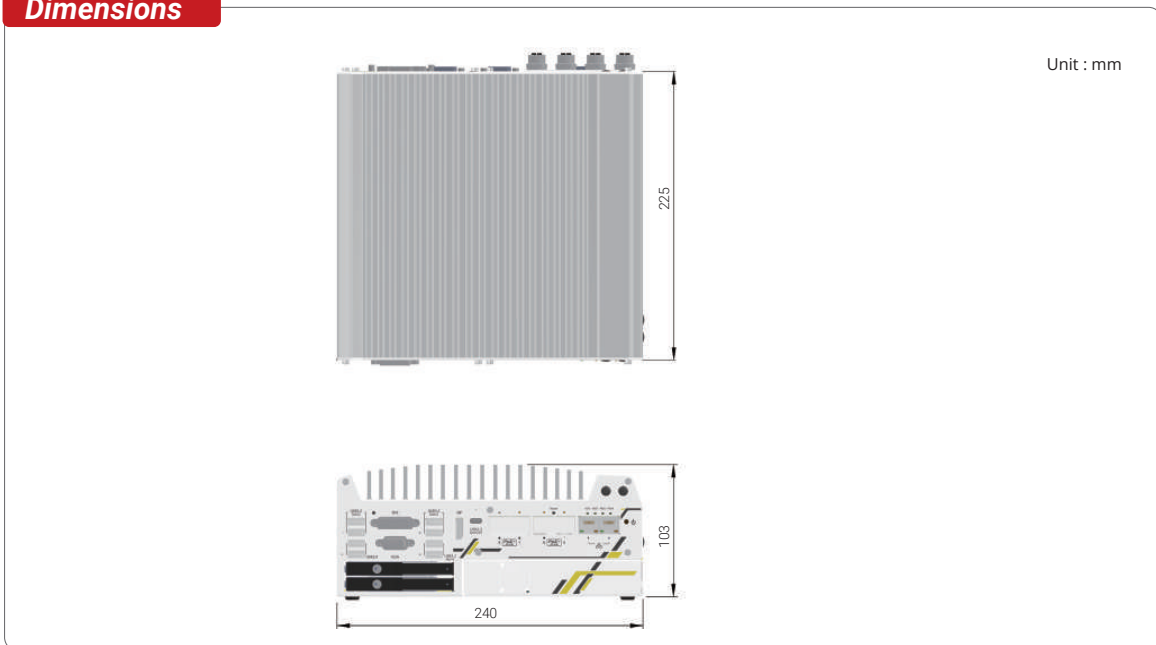

**Ordering Information**

Model No.	Product Description
<b>Nuvo-9200VTC</b>	Intel® 13th/ 12th-Gen Core™ in-vehicle controller with 4x M12 PoE+ Ports, DIO, CAN bus and RAID, single-slot PCI Express Cassette
<b>Nuvo-9204VTC</b>	Intel® 13th/ 12th-Gen Core™ in-vehicle controller with 4x RJ45 PoE+ Ports, DIO, CAN bus and RAID, single-slot PCI Express Cassette
<b>Nuvo-9208VTC</b>	Intel® 13th/ 12th-Gen Core™ in-vehicle controller with 8x RJ45 PoE+ Ports, DIO, CAN bus and RAID, single-slot PCI Express Cassette

**Optional Accessories**

<b>Cbl-M12X8M-RJ45F-100CM</b>	M12 (8-pole-X-coded) to RJ45 Female, CAT6A, Length : 100CM
<b>Cbl-M12X8M-RJ45-CAT6A-500CM</b>	M12 (8-pole-X-coded) to RJ45, CAT6A, Length : 500CM
<b>Fankit-25</b>	Fan assembly for 1-slot Cassette, 25x25x10 mm
<b>PA-280W-ET2</b>	280W AC/DC power adapter 24V/ 11.67A ; 16AWG/ 100cm; cord end terminals for terminal block, operating temperature : -30°C to 60°C.

All specifications and photos are subject to change without prior notice

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660