



FANLESS EMBEDDED SYSTEMS RC0-3400 series

Advanced Fanless Embedded System with Intel[®] Core™ i5/i3 Processor, 2x LAN

FEATURES

- Intel[®] 7th Gen (Kabylake-U) Processor Core™ i5-7300U, Core™ i3-7100U
- 1x DDR4 SODIMM. max up to 16GB
- Triple independent display supported by 1x VGA and 2x DisplayPort
- 2x Intel[®] GbE supporting Wake-on-LAN and PXE
- 2x 2.5" SATA HDD Bay (1x internal, 1x removable) with RAID 0, 1, 5 support, 1x mSATA (shared by 1x Mini PCIe), and 1x CFast (shared by 1x mSATA)
- 2x full-size mini PCIe for communication or expansion modules, 2x SIM socket
- 5x RS-232/422/485 (w/ 3x internal), 4x USB 3.0, 2x USB 2.0
- 8x DI + 8x DO with isolation
- 9 to 50VDC wide range power input supporting AT/ATX mode
- -40°C to 70°C extended operating temperature
- TPM 2.0 Supported



SPECIFICATIONS


SI LOII IOATIONS			
System			
Processor	7 th Gen Intel [®] Core™ i5-7300U Processor, Dual Core, 3MB Cache, up to 3.5 GHz 7 th Gen Intel [®] Core™ i3-7100U Processor, Dual Core, 3MB Cache, 2.4 GHz		
System Chipset	SoC integrated		
LAN Chipset	GbE1: Intel® I219LM (Support Wake-on-LAN and PXE) GbE2: Intel® I210-AT (Support Wake-on-LAN and PXE) GbE3~GbE6: Intel® I210-AT (Optional)		
Audio Codec	Realtek ALC888S		
System Memory	1x 260-Pin DDR4 1866/2133MHz SODIMM. Max. up to 16GB		
BIOS	AMI 128Mbit SPI BIOS		
Watchdog	Software Programmable Supports 1~255 sec. System Reset		
ТРМ	TPM 2.0		
Display			
VGA	1x VGA		
DisplayPort	2x DisplayPort		
Multiple Display	Triple Display		
Storage			
SSD/HDD	1x Internal 2.5" SATA HDD Bay 1x Removable 2.5" SATA HDD Bay Support RAID 0, 1, 5		
mSATA	1x mSATA (shared by 1x Mini PCI Express)		
CFast	1x CFast (shared by 1x mSATA)		
SIM Socket	2x External SIM socket		
Expansion			
Mini PCI Express	2x Full-size Mini PCIe		
4-Port GbE (Optional)	Up to one 4-port GbE module with Intel [®] I210-AT Chipset RJ-45 or M12 connector with PoE option		
I/O			
СОМ	2x RS-232/422/485 3x RS-232/422/485 (internal)		
USB	4x USB 3.0, 2x USB 2.0		
LAN	2x RJ45		


Audio	1x Mic-in, 1x Line-out	
DIO	8 in / 8 out (Isolated)	
Others	4x WiFi Antenna Holes 1x Power Switch, 1x AT/ATX Switch, 1x Remote Power On/Off	
Operating System		
Windows	Windows 10	
Linux	Linux kernel 4.X	
Power		
Power Mode	AT, ATX	
Power Supply Voltage	9~50VDC	
Power Ignition Sensing	Power Ignition Management	
Power Connector	3-pin Terminal Block	
Power Adaptor	Optional AC/DC 12V/5A, 60W	
Power Protection	OVP (Over Voltage Protection) OCP (Over Current Protection) Reverse Protection	
Environment		
Operating Temp.	-40°C to 70°C	
Storage Temp.	-40°C to 85°C	
Relative Humidity	10% to 95% (non-condensing)	
Vibration	With SSD: 5 Grms, 5 - 500 Hz, 0.5 hr/axis With HDD: 1 Grms, 5 - 500 Hz, 0.5 hr/axis	
Shock	With SSD: 50G, half sine, 11ms	
Standards / Certification	CE, FCC Class A	
Physical		
Construction	Extruded Aluminum with Heavy Duty Metal	
Dimension	192 (W) x 197 (D) x 57.6 (H) mm	
Weight	nt 2.17 kg~ 2.66 kg	
Mounting	Wall Mounting DIN-Rail Mounting(Optional)	






EXTERNAL I/O MECHANICAL LAYOUT

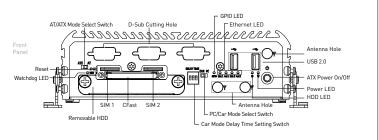

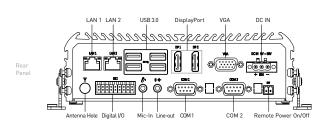




RC0-3400-4L Additional 4x Intel® GbE 3x RS-232/422/485 (w/ 1x internal)

3x RS-232/422/485 (w/ 1x internal) RC0-3400-4P

Additional 4x Intel® GbE with PoE function 3x RS-232/422/485 (w/ 1x internal)




RC0-3400-4L-M12

Additional 4x Intel[®] GbE with M12 connector 3x RS-232/422/485 (w/ 1x internal) Optional AC/DC 24V/9.2A, 220W

RC0-3400-4P-M12

Additional 4x Intel[®] GbE with M12 PoE function 3x RS-232/422/485 (w/ 1x internal) Optional AC/DC 24V/9.2A, 220W

DIMENSION

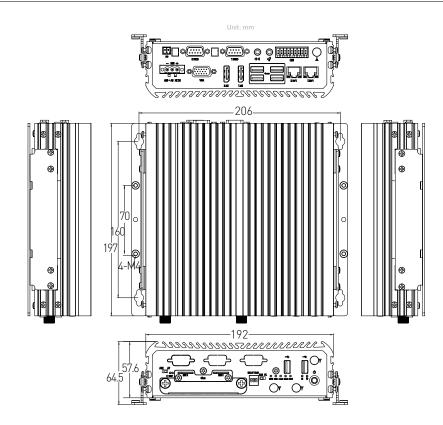



[23]



ORDERING INFORMATION

MODEL NO.	DESCRIPTION	
1-E09A06008	Adapter AC/DC 12V 5A 60W with 3pin Terminal Block Plug 5.0mm Pitch	
1-E09A22102	Adapter AC/DC 24V 9.2A 220W with 3pin Terminal Block Plug 5.0mm Pitch	
1-TPCD00005	Power Cord, 3-pin US Type, 180cm	
1-TPCD00002	Power Cord, European Type	
1-TPCD00001	Power Cord, 3-pin UK Type, 180cm	
3-DINR-0004	DIN-Rail Mount Kit	
PACKING LIST		
• 1x RC0-3400 Series Embedded System		
• 1x Wall Mount Kit		

• IX Wall Moullin

• 1x Accessory Kit

AVAILABLE MODELS

MODEL	MODEL NO.	DESCRIPTION
RCO-3400	RCO-3400-7300U	Advanced Fanless System with Intel [®] Core™ i5-7300U Processor, 2x LAN
	RCO-3400-7100U	Advanced Fanless System with Intel [®] Core™ i3-7100U Processor, 2x LAN
	RCO-3400-4L-7300U	Advanced Fanless System with Intel [®] Core™ i5-7300U Processor, 6x LAN
	RCO-3400-4L-7100U	Advanced Fanless System with Intel [®] Core™ i3-7100U Processor, 6x LAN
	RCO-3400-4L-M12-7300U	Advanced Fanless System with Intel [®] Core™ i5-7300U Processor, 2x LAN, 4x M12 LAN
	RC0-3400-4L-M12-7100U	Advanced Fanless System with Intel [®] Core™ i3-7100U Processor, 2x LAN, 4x M12 LAN
	RCO-3400-4P-7300U	Advanced Fanless System with Intel [®] Core™ i5-7300U Processor, 2x LAN, 4x PoE
	RC0-3400-4P-7100U	Advanced Fanless System with Intel [®] Core™ i3-7100U Processor, 2x LAN, 4x PoE
	RC0-3400-4P-M12-7300U	Advanced Fanless System with Intel [®] Core™ i5-7300U Processor, 2x LAN, 4x M12 PoE
	RCO-3400-4P-M12-7100U	Advanced Fanless System with Intel® Core™ i3-7100U Processor, 2x LAN, 4x M12 PoE



C&T Solution Inc.

 17F-2, No. 700, Zhongzheng Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)

 Tel: +886-2-7731-7888
 Fax: +886-2-7731-7855

 Email: info@candtsolution.com



Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508 Support: +1 347 719 4508

1309 Coffeen Ave Ste 1200 Sheridan WY 82801 USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050 Support: +44 (0)1785 879 050

Unit A5 Douglas Park Stone Business Park Stone ST15 0YJ United Kingdom

VAT Number: 120 9546 28 Business Registration Number: 07699660