

LMX-1202G-SFP Series

12-Port Industrial Gigabit Light Layer 3 Managed Ethernet Switch, with 10*10/100/1000Tx and 2*100/1000 SFP Slots



Features


- Supports 10*10/100/1000Tx Gigabit Ethernet Ports and 2*100/1000 SFP Slots
- Network Redundancy Support: STP/RSTP/MSTP, and G.8032 ERPS (Recovery Time <50ms)
- Configuration: Web Console, Telnet, CLI Command
- Supports IGMP v1/v2/v3, up to 1024 Groups
- Supports QoS (IEEE802.1p) and CoS/ToS
- Supports IEEE802.1Q VLAN, SNMP v1/v2c/v3
- Power Input: 12~48VDC in 6-Pin Terminal Block
- Reverse Polarity Protection
- IP30 Protection
- DIN-Rail or Wall Mountable
- Operating Temperature Range
 - STD: -10°C to 65°C, EOT: -40°C to 75°C
- 5-Year Warranty

INTRODUCTION

Antaira Technologies' LMX-1202G-SFP series is a 12-port industrial managed gigabit managed Ethernet switch embedded with 10*10/100/1000Tx Ethernet ports and 2*100/1000Fx fiber connection. The LMX-1202G-SFP series is a fully manageable light layer 3 Ethernet switch that is pre-loaded with a user-friendly web management console design. It supports the ring network redundancy function using the market's open standard ITU-T G.8032 Ethernet Ring Protection Switch (ERPS) protocol that has a <50ms network recovery time. The advanced network filtering and security functions, such as IGMP, VLAN, QoS, SNMP, RMON, Modbus TCP, and 802.1X/HTTPS/SSH/SSL increase determinism and improve network management for remote SCADA systems or control networks.

The LMX-1202G-SFP series is IP30 rated and DIN-rail mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 65°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides high EFT and ESD protection for industrial networking applications, such as power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance, ITS and any other outdoor or harsh environment.

DIMENSIONS

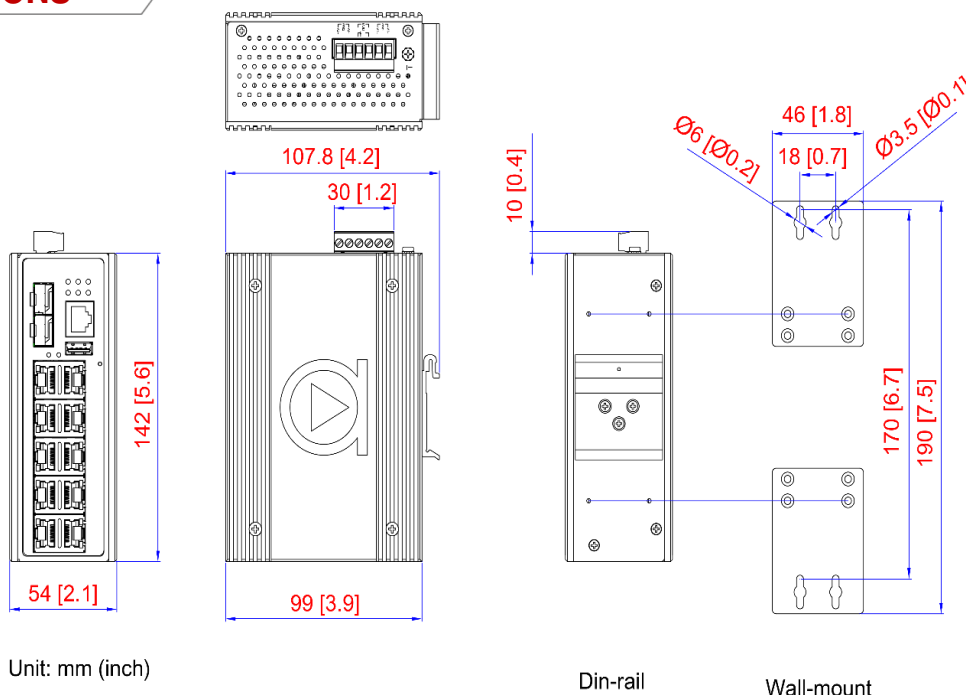

SPECIFICATIONS

Technology		Protection	
L2 Switching	Port/MAC/Protocol/IP Subnet-based VLAN, GARP/GVRP, Loop Guard, Link Aggregation static/LACP, BPDU guard, Error disable recovery, IGMP snooping v2/v3, MLD snooping v1/v2, IGMP filtering, IPMC throttling / filtering leave proxy, DHCP snooping, G.8032 v1/v2, NAT, DHCP per port, SMTP, Quick ERPS, TLS	Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m) 1000Base-TX: 4-pair UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)
	L3 Switching		
QoS	802.1p Queueing, Input priority mapping, Storm control for Unicast/Multicast/Broadcast, Port/Queue/ACL policer, Port egress shaper, Queue egress shaper, DiffServ (DSCP), Tag remarking, Scheduler mode	Mechanical Characteristics	
	Power Saving	Housing	Metal, IP30 protection
Network Redundancy	STP/RSTP/MSTP, port trunk with LACP, ERPS v1/v2 (<50ms)	Dimensions	54 x 142 x 99 mm (W x H x D)
	Configuration	Weight	Unit: 1.98 lbs Shipping: 2.87 lbs
System / Diagnostics	Dual Image Protection, PING, PING6	Mounting	DIN-Rail mounting, Wall mounting
	Switch Properties	Power Requirement	
Switch Architecture	Back-Plane (Switching Fabric): 24.0Gbps IPv4/IPv6, SNMP v1/v2c/v3, LLDP, LLDP-MED, HTTP, HTTPS, SSHv2 telnet, DHCP client, DHCPv6 client, DHCP server, Port Mirror, DNS client/proxy, IP based Access Filter, ICMPv6, syslog, Time Zone / Daylight Saving, NTP client, RMON, sFlow, Loop detection, Console Port, Power Lost Warning, Relay Trigger	Input Voltage	12~48VDC Redundant Input
	Protocols	Power Connection	1 removable 6-contact terminal block
Processing Type	Store and Forward	Relay Contact	24VDC, 1A resistive
	Flow Control	Overload Current Protection	Present
Transfer Rate	14,880pps for 10Base-T Ethernet 148,800pps for 100Base-T Fast Ethernet 1,488,000pps for Gigabit Ethernet	Reverse Polarity Protection	Present
	Memory Buffer	System Power Consumption	15W
Jumbo Frame	9.6Kbytes	Environmental Limits	
MAC Table Size	8K	Operating Temperature	STD: -10°C to 65°C EOT: -40°C to 75°C
VLAN Group	4095	Storage Temperature	-40°C to 85°C
IGMP Group	1024	Ambient Relative Humidity	5% to 95%, (non-condensing)
Port Interface		Regulatory Approvals	
Ethernet Port	10*10/100/1000Base-Tx Auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection	EMI	FCC Part 15 Subpart B Class A, CE EN55032/EN61000-6-4 Class A
	SFP Port	EMS	CE EN55024/EN61000-6-2 Class A, IEC61000-4-2,3,4,5,6,8
RS232 Serial Console	1*RS232 in RJ45 connector with console cable, 115.2Kbps, 8, N, 1	Free Fall	IEC60068-2-32
LED Indicators	System: Power 1, Power 2, Fault, Master, and Ring	Shock	IEC60068-2-27
	Ethernet Ports: Speed/Link/Active Fixed Fiber: Link/Active	Vibration	IEC60068-2-6
		Green	RoHS Compliant
		Certifications	FCC, CE, UL 61010-1, 61010-2-201, ISA 12.12.01 Class 1 Division 2, ATEX II 3G Ex nA nC IIC T4 Gc, NEMA TS2
		Warranty	5 Years

ORDERING INFO

LMX-1202G-SFP	12-Port Industrial Gigabit Light Layer 3 Managed Ethernet Switch, with 10*10/100/1000Tx and 2*100/1000 SFP Slots
LMX-1202G-SFP-T	12-Port Industrial Gigabit Light Layer 3 Managed Ethernet Switch, with 10*10/100/1000Tx and 2*100/1000 SFP Slots; EOT: -40°C to 75°C

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660