


PICO841

Pico-ITX SBC with Intel® Atom® Processor E3845/E3827, LVDS/VGA, LAN and Audio

Features

- Intel® Atom® processor E3845/E3827
- 1 DDR3L-1066/1333 SO-DIMM, up to 8GB
- 4 USB 2.0 ports
- 2 COM ports
- 2 PCI Express Mini Card slots

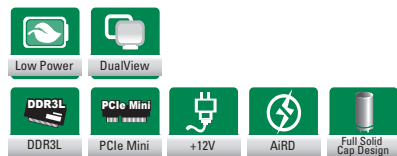

Core System



CPU	Intel® Atom® processor E3845 quad core, E3827 dual core onboard (Bay Trail)
System Memory	1 x 204-pin DDR3L-1066/1333 SO-DIMM, up to 8GB
Chipset	SoC integrated
BIOS	AMI
SSD	N/A
Watchdog Timer	255 levels, 1 ~ 255 sec.
Expansion Interface	1 x full-size PCI Express Mini Card slot with mSATA 1 x half-size PCI Express Mini Card slot
Battery Lithium	Lithium 3V/220mAh
Power Input	1 x 4-pin connector +12V DC-in only AT Auto Power On function supported
Power Requirements	Intel® Atom® E3845 @ 1.91 GHz, 8GB DDR3L Max. RMS: +12V @ 1.49A Intel® Atom® E3827 @ 1.75 GHz, 8GB DDR3L Max. RMS: +12V @ 1.31A
Size	100 x 72 mm
Board Thickness	1.6 mm
Temperature	-20°C ~ +70°C (-4°F ~ +158°F), operation
Relative Humidity	10% ~ 95% relative humidity, non-condensing

I/O


MIO	2 x RS-232/422/485
SATA	1 x SATA-300
Hardware Monitoring	Detect CPU/system temperature and voltage
Ethernet	1 port 10/100/1000 Mbps supports Wake-on-LAN, PXE Boot ROM with Intel® i211AT
Audio	HD Codec audio as MIC-in/Line-out with Realtek ALC662
USB	4 x USB 2.0
SMBus	System Management Bus for advanced monitoring/control
Digital I/O	NA
TPM	ST ST33TPM12LPC with TPM 1.2 compliant

Display

Chipset	Intel® HD Graphics
Memory Size	Share system memory
Display Interface	1 x VGA 1 x LVDS; 18/24-bit single/dual channel

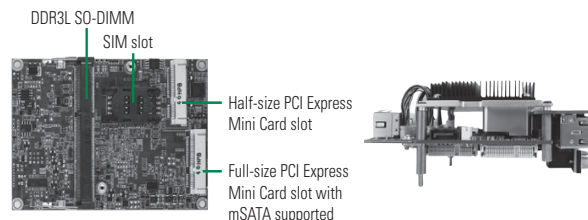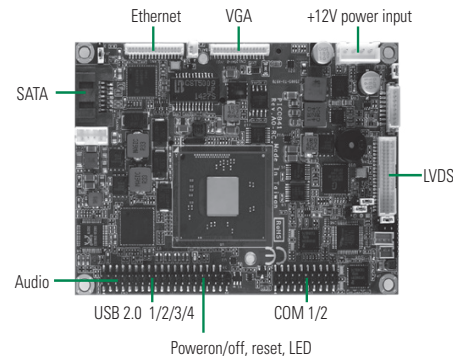

▲ Rear view

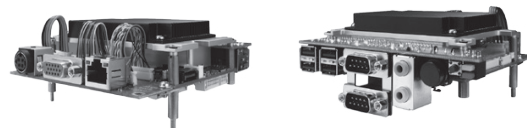

▲ Assembly view

Packing List

Standard

Quick installation guide, User's Manual/Utility CD and cable

Accessories

Part Number	Description	Qty
85932831000E	AX93283 I/O board	1
85932671000E	AX93267 I/O board	1
59406308010E	SATA cable	1
59405300610E	SATA power cable	1
5078H841000E	Heatspreader	1
5078H100200E	Heatsink	1

Optional

Part Number	Description
594H8302800E	USB cable 20 x 2P, P=2.0 mm, L=200 mm
594H8303000E	Audio cable 20 x 2P, P=2.0 mm, L=200 mm
594H8301600E	Power/Reset button + LED cable
594H8302100E	COM cable 10 x 2P, P=2.0 mm, L=200 mm
59340000200E	USB + audio + LED cable, L=200 mm

Ordering Information

Standard

PICO841VGA-E3845 (P/N: E38H841104)	Pico-ITX SBC with Intel® Atom® processor E3845 (1.91 GHz, 2 MB Cache, 10 W), VGA/LVDS, 1 GbE LAN, audio and gift box
PICO841VGA-E3827 (P/N: E38H841105)	Pico-ITX SBC with Intel® Atom® processor E3827 (1.75 GHz, 1 MB Cache, 8 W), VGA/LVDS, 1 GbE LAN, audio and gift box

Updated Nov. 27, 2017. * All specifications and photos are subject to change without notice.

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660