

PhanTAM-121AP(H)

21.5" IP66 / IP69K True Flat and Slim Design Stainless Steel Display

Industrial Panel PC HMI Controller

Display Monitor



Features / /

- 21.5" Fanless Stainless Steel Display
- IP66/69K Full Sealed with Anti-Corrosion Enclosure
- Ultra Slim Front Frame Design
- Special Hygienic Bolts on Rear Case
- M12 Connectors with Waterproof Cover
- DC 24V Power Input



Speci

| Çİ | fi | Cá | ati | or | ıs | / | 4 |
|----|----|----|-----|----|----|---|---|
| | | | | | | | • |

| IO Port | |
|-------------------------|---|
| VGA | 1 x M12 12-pin for VGA with waterproof cover |
| HDMI | 1 x W.F. Micro-HDMI with waterproof cap |
| USB | 1 x M12 8-pin for USB Touch with waterproof cover |
| OSD Control Membrane | OSD on the rear side |
| Power Connector | 1 x M12 3-pin for DC power with waterproof cover |

| Display | Standard | High Brightness Optional |
|--------------------|----------------|--------------------------|
| Display Type | 21.5" TFT-LCD | 21.5" TFT-LCD |
| Max. Resolution | 1920 x 1080 | 1920 x 1080 |
| Max. Color | 16.7M | 16.7M |
| Luminance (cd/m²) | 250 | 1000 |
| View Angle | 178(H) /178(V) | 178(H) /178(V) |
| Contrast | 1000:1 | 3000:1 |
| Backlight Lifetime | 50,000 hrs | 30,000 hrs |


| Touch Screen | |
|-----------------------|----------------------------|
| Туре | Projected Capacitive Touch |
| Interface | USB |
| Light Transmission(%) | 90% |

| Power Input | DC 24V |
|-------------------|---|
| Power Consumption | PhanTAM-121AP: 14.7W (MAX) |
| | |
| Mechanical | |
| Construction | 304 Stainless steel chassis (default), 316 Stainless steel chassis (optional) |

| | Construction | 304 Stainless steel chassis (default), 316 Stainless steel chassis (optional) |
|--|--------------|---|
| | Mounting | VESA Mount 100 x 100, Swing ARM (optional) |
| | IP Rating | Total IP66/IP69K |
| | Dimensions | 540.4 x 332.4 x 61.5 mm |
| | Net Weight | 7.6 kg |
| | | |

| Environmental | |
|-----------------------|-------------------------------------|
| Operating Temperature | 0~50°C (WT1: -20~60°C for optional) |
| Storage Temperature | -30~70°C |
| Humidity | 10 to 90% @ 40°C, non- condensing |
| Certificate | CE/FCC Class A |

Dimensions /)

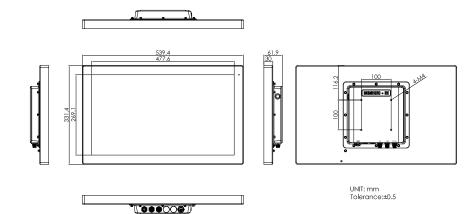

21.5" FHD IP66/IP69K stainless steel display, VGA/HDMI input, OSD on the rear side, projected capacitive touch, 9~36V DC power input with Adapter 21.5" FHD IP66/IP69K stainless steel display, VGA/HDMI input, OSD on the rear PhanTAM-121APH side, projected capacitive touch, 9~36V DC power input with Adapter, 1,000 nits LCD

V 1.6

Industrial Display

All specifications and photos are subject to change without notice.

Industrial Display



Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508 Support: +1 347 719 4508

1309 Coffeen Ave Ste 1200 Sheridan WY 82801 **USA**

FMFA

sales@assured-systems.com

Sales: +44 (0)1785 879 050 Support: +44 (0)1785 879 050

Unit A5 Douglas Park Stone Business Park Stone ST15 0YJ **United Kingdom**

VAT Number: 120 9546 28

Business Registration Number: 07699660