



Industrial Solutions Partner!

SSD2925

29.3" Resizing LCD, 1000 nits LED backlight, 1366x512 ultra wide aspect ratio 16:6

SSD2925 is an innovative ultra-wide, sunlight readable, LED backlight LCD display. It provides LCD panel with specific ratios for digital signage, public transportation, exhibition hall, department store, vending machine and industrial applications. Incorporating with A.D. control board and backlight design, it is high brightness and sunlight readable panel, can display high-quality video with energy-efficient.

Key Features

- Resizing LCD
- Ultra Wide Screen (16 : 6)
- Sunlight Readable
- LED Backlight
- High Brightness 1000 nits
- Low Power Consumption
- High Uniformity (90%)
- Wide Dimming
- Life Expectancy (70,000hrs)
- Slim Bezel



Specifications

V2

Model No.	SSD2925
Description	29.3" Resizing LCD, 1000 nits LED backlight, 1366x512
Display Area	697.68 x 261.5 mm
Brightness	1,000 cd/m ²
Resolution	1366 x 512
Aspect Ratio	16 : 6
Contrast Ratio	2500:1
Pixel Pitch (mm)	0.51075 x 0.51075
Viewing Angle	176°(H), 176°(V)
Display Colors	16.7M
Response Time (Typical)	6.5 ms
Sync	LVDS
Power Consumption	70W
Dimensions (mm)	740.2 x 298 x 60.9
Weight (Net)	7 Kg
LED Driving Board	LID29A02
Control Board (Optional)	AD2662GD / AD2662GDVAR
☐ AD2662GD	VGA + DVI
☐ AD2662GDVAR	VGA + DVI (Optional AV/ S-Video / Component / Audio)
☐ Others	
F / R Control Button	5 Key / 4 Key
☐ 4 Key	Power Switch, Menu, Select (+,-),
☐ 5 Key	Power Switch, Menu, Select (+,-), Auto
OSD Menu	Brightness, Contrast, H/V Position, Color, Phase, Clock...
Optional	☐ Touch Screen

Specifications are subject to change without notice.

All brands or product names are trademarks or registered trademarks of their respective companies.


SSD = Panel + LED Driving Board + Control Board



Industrial Solutions Partner!

Mechanical Drawing

Outline Dimensions

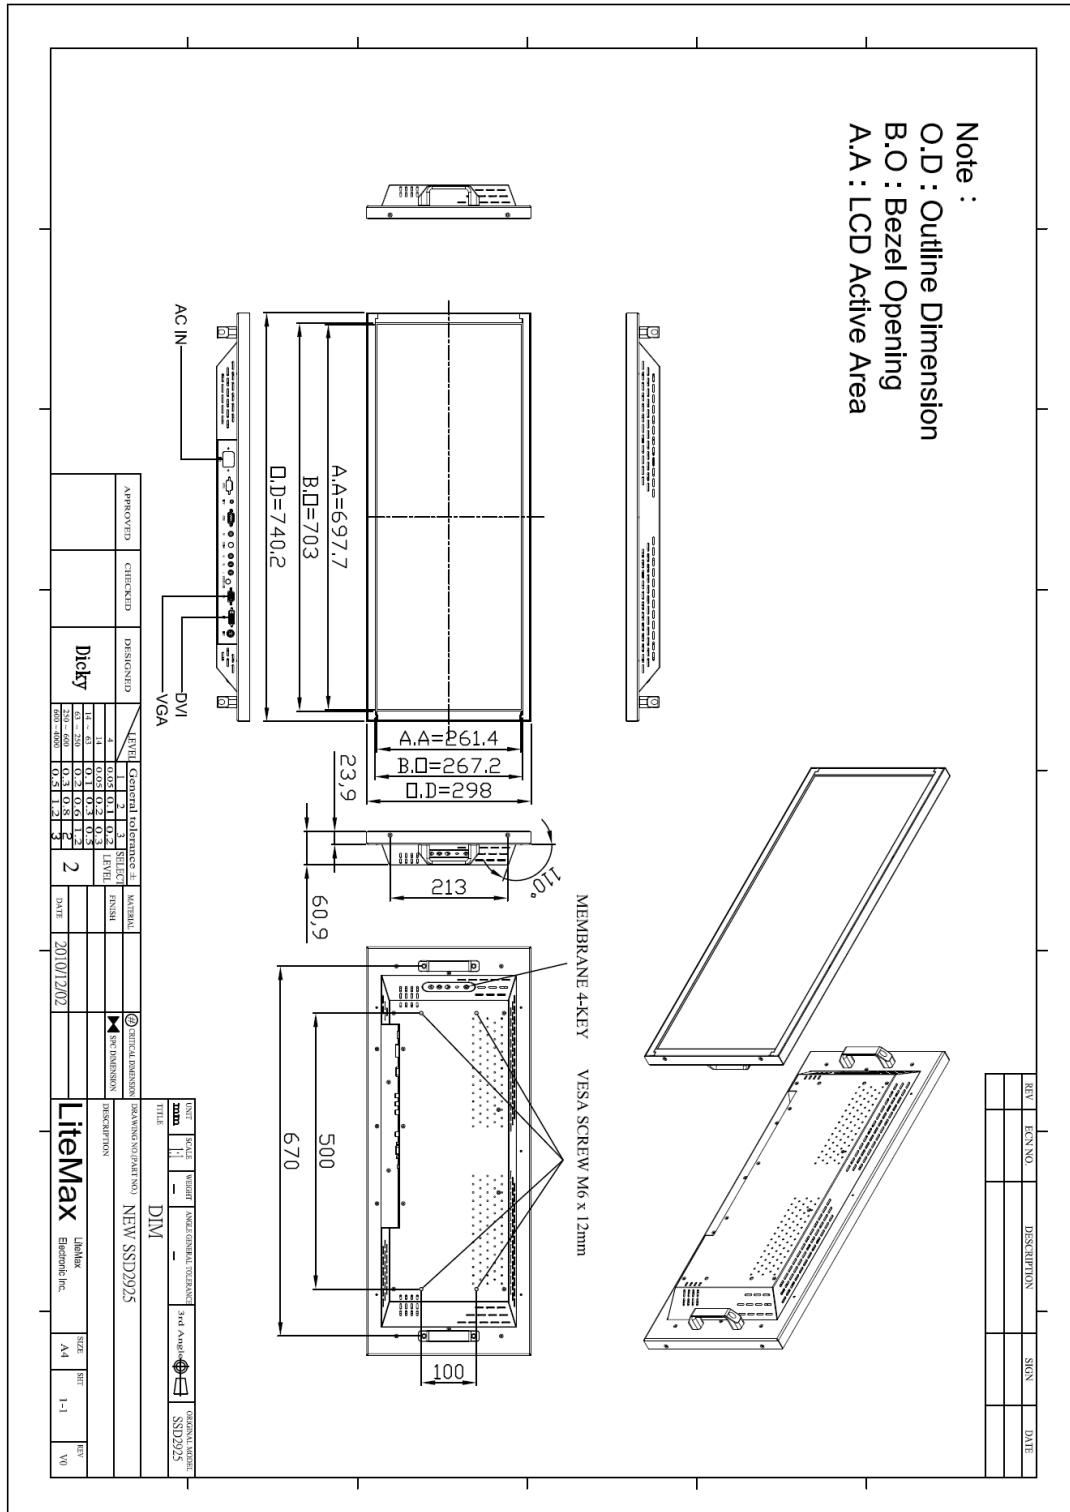



Industrial Solutions Partner!

Ordering Information

Model Name	Description
SSD2925-ENB-G03	29.3",1000nits,1366*512.LID29,AD2662GD,O/B.AC100~240V input,PF,2-in-1 carton,V1
SSD2925-ENB-G04	29.3",1000nits,1366*512.LID29,AD2662GDVAR,O/B,5w-speaker,AC100~240V input,PF,2-in-1 carton.V1

Optional Accessories

Part Number	Description
810618301010 (Optional)	CABLE.POWER.AC.1830mm.(US Type).3PIN PLUG TO SOCKET.SVT(SPT-2)18AWG 3C BLACK,P.
810618301090 (Optional)	CABLE,POWER,AC,1830mm.(EU Type) 3PIN PLUG TO.SOCKET,H05VV-F 3G.0.75MMSQ BLACK,P
810618301050 (Optional)	CABLE,POWER,AC,1830mm.UK(FUSE) 3PIN PLUG TO.SOCKET,H05VV-F 3C(3G) 0.75MMSQ BLACK,P
810618301170 (Optional)	CABLE.POWER,AC,1830mm. (AU Type) 3PIN PLUG TO 2P SOCKET.LTSA 0.75MMSQ BLACK,P
810618301030 (Optional)	CABLE.POWER.AC.1830mm.(JP Type).2PIN PLUG Y TERMINAL TO. SOCKET.VCTF 3C 0.75MMSQ BLACK,P

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660