

LMP-1202G-SFP Series

12-Port Industrial Gigabit PoE+ Managed Ethernet Switch, with 8*10/100/1000Tx (30W/Port), 2*10/100/1000Tx + 2*100/1000 SFP Slots



Features


- ▶ Supports 8*10/100/1000Tx IEEE 802.3at/af Compliant with 30W/Port, 2*10/100/1000Tx & 2*100/1000Fx SFP Fiber Slots
- ▶ Network Redundancy: STP/RSTP/MSTP, and G.8032 ERPS (Recovery Time <50ms)
- ▶ Supports IPv4/IPv6, and DHCP Option 66/67/82
- ▶ Supports Modbus/TCP Protocol for Device Management and Monitoring
- ▶ Configuration: Web Console, Telnet, CLI Command
- ▶ IGMP v1/v2 for Multicast Traffic Filtering
- ▶ QoS (IEEE802.1p/1Q), CoS/ToS to Increase Determinism
- ▶ IEEE802.1Q VLAN for Easy Network Planning
- ▶ Enhanced Network Security with IEEE802.1X, SNMP v1/v2c/v3, HTTPS, and SSH/SSL
- ▶ Auto Warning by Exception through E-mail, Relay Output
- ▶ Operating Temp.– STD: -10~70°C, EOT: -40~75°C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' LMP-1202G-SFP series is a 12-port industrial PoE+ managed Ethernet switch is embedded with 8*10/100/1000Tx Ethernet ports that support IEEE802.3at/af for a maximum of 30W/port, 2*10/100/1000Tx and 2*100/1000Fx SFP fiber ports that support either Single or Multi-Mode modules. The LMP-1202G-SFP series is a fully manageable Layer 2 Ethernet switch that is pre-loaded with a user-friendly web management console design. It supports the ring network redundancy function using the market's open standard ITU-T G.8032 ERPS (Ethernet Ring Protection Switch) protocol that has a <50ms network recovery time. The advanced network filtering and security functions, such as, IGMP, VLAN, QoS, SNMP, port lock, RMON, Modbus TCP, and 802.1X/ HTTPS/ SSH/ SSL increase determinism and improve network management for remote SCADA systems or control networks.

The LMP-1202G-SFP series is IP30 rated and DIN-rail mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides high EFT and ESD protection for industrial networking applications, such as, power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance within transportation, ITS and any other outdoor or harsh environment.

DIMENSIONS

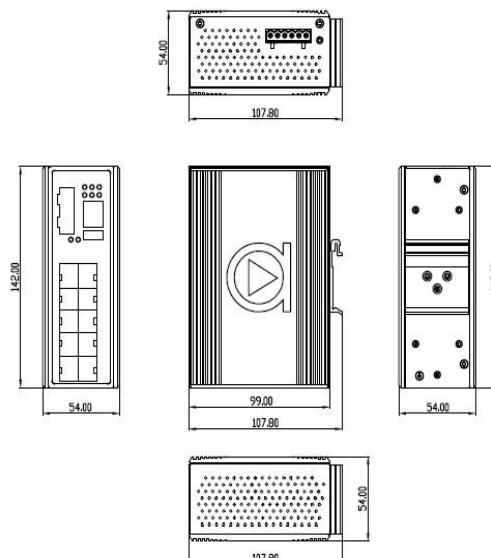

SPECIFICATIONS

Technology		Protection	
Standards	IEEE 802.3 10Tx Ethernet	Overload Current	Present
	IEEE 802.3u 100Tx Fast Ethernet	Power Reverse Polarity	Present (the unit will not be on, if power reverse)
	IEEE 802.3ab 1000Tx Gigabit Ethernet	Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable;
	IEEE 802.3z Gigabit Fiber		100Base-TX: 2-pair UTP/STP Cat. 5 cable. EIA/TIA- 568 100-ohm (100m)
	IEEE 802.3x Flow Control for Full Duplex		1000BaseTX: UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)
	IEEE 802.3ad for Port Trunk with LACP	Mechanical Characteristics	
	IEEE 802.3at/af PoE (Power-over-Ethernet)	LED Indicator	Per Unit: Power 1 & 2 (Green), Fault (Red) PoE: Feeding Power (Green)
	IEEE 802.1d STP (Spanning Tree Protocol)	Housing	Metal, IP30 rated
	IEEE 802.1w RSTP (Rapid Spanning Tree Protocol)	Dimensions	54 x 142 x 99 mm
	IEEE 802.1s MSTP (Multiple Spanning Tree Protocol)	Weight	Unit: 2.5 lbs Shipping: 3.0 lbs
	ITU-T G.8032/Y.1344 ERPS (Ethernet Ring Protection Switch) Protocol	Mounting	DIN-Rail; Wall-mount (optional)
	IEEE 802.1Q for VLAN Tagging	Power Requirement	
	IEEE 802.1x for Network Authentication	Input Voltage	48~55VDC Redundant Input
	IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization	Power Connection	1 removable 6-contact terminal block
Switch Properties		PoE Power Output	25W @ 48VDC (per PoE port); 30W @ 51~55VDC (per PoE port)
Switch Architecture	Back-Plane (Switching Fabric): 24.0Gbps IGMPv1/v2, SNMPv1/v2c/v3, TFTP, SNMP, SMTP, RMON, HTTP, HTTPS, Telnet, Syslog, DHCP Option 66/67/82, SSH/SSL, Modbus/TCP, LLDP, IPv4/IPv6, NAT, DHCP per port, SMTP, Quick ERPS, TLS	Power Consumption	15 Watts (no PD included); 255 Watts (Fully Loaded)
Protocol	Store-and-Forward	Environmental Limits	
Data Process	14,880pps for 10Base-T Ethernet 148,800pps for 100Base-T Fast Ethernet 1,488,000pps for Gigabit Ethernet	Operating Temperature	STD: -10° to 70°C EOT: -40° to 75°C
Transfer Rate	4 Mbits	Storage Temperature	-40°~85°C
Packet Buffer	8K	Ambient Relative Humidity	5 to 95%, (Non-condensing)
MAC Table	9.6K	Regulatory Approvals	
Jumbo Frame	IEEE 802.3x for full duplex mode, back pressure for half duplex mode	EMI	FCC Class A
Flow Control	0 ~ 4094	EMS	EN6100-4-2,3,4,5,6,8 EN6100-6-2,4
VLAN Group	Up to 256 Groups	Free Fall Shock	IEC60068-2-32 IEC60068-2-27
IGMP Group	8*10/100/1000Tx (PSE: 30W/Port), 2*10/100/1000Tx auto negotiation speed, Full/Half duplex mode, and auto MDI connection	Vibration	IEC60068-2-6
Port Interface	2*100/1000 Dual Rate SFP Slots	Green	RoHS Compliant
Ethernet Port	Dependent on Fiber type and Distance	Certifications	FCC, CE, UL 61010-1, 61010-2-201, Class 1 Division 2NEMA TS2, ATEX
Fiber Port	1*RS232 in RJ45 connector with console cable, 115.2bps, 8,N,1	Warranty	5 Years
Wavelength	1*USB 2.0		
RS232 Serial Console			
Configuration Backup			

ORDERING INFO

LMP-1202G-SFP	12-Port Industrial Gigabit PoE+ Managed Ethernet Switch, with 8*10/100/1000Tx (30W/Port), 2*10/100/1000Tx and 2*100/1000 SFP Slots
LMP-1202G-SFP-T	12-Port Industrial Gigabit PoE+ Managed Ethernet Switch, with 8*10/100/1000Tx (30W/Port), 2*10/100/1000Tx and 2*100/1000 SFP Slots; EOT: -40°~75°C

Optional Accessories

DR-120-48	120W Industrial Single Output DIN-Rail Power Supply – 48VDC / 2.5 Amps
SDR-240-48	240W Industrial Slim High-Efficiency Single Output DIN-Rail Power Supply – 48VDC / 5.0 Amps
SFP-M-T	1 Gigabit Fiber SFP Transceiver, Multi-Mode 550M / LC / 850nm, -40°~85°C
SFP-S10-T	1 Gigabit Fiber SFP Transceiver, Single Mode 10KM / LC / 1310nm, -40°~85°C
DIN-RACK-2U	DIN-Rail to 19" Rack Mount Adapter for all DIN-Rail Mountable Products, 2U Height

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660