

LMP-0800G-24 Series

Features

8-Port Industrial Gigabit PoE+ Managed Ethernet Switch, w/8*10/100/1000Tx (30W/Port); 12~36VDC Power Input (w/ Voltage Booster)




- ▶ Supports 8*10/100/1000Tx IEEE 802.3at/af Compliant with 30W/Port
- ▶ Network Redundancy: STP/RSTP/MSTP, and G.8032 ERPS (Recovery Time <50ms)
- ▶ Supports IPv4/IPv6, and DHCP Option 66/67/82
- ▶ Supports Modbus/TCP Protocol for Device Management and Monitoring
- ▶ Configuration: Web Console, Telnet, CLI Command
- ▶ PoE Ping Alarm Function for PoE Ports Power Recycle
- ▶ IGMP v1/v2 for Multicast Traffic Filtering
- ▶ QoS (IEEE802.1p/1Q), CoS/ToS to Increase Determinism
- ▶ IEEE802.1Q VLAN for Easy Network Planning
- ▶ Enhanced Network Security with IEEE802.1X, SNMP v1/v2c/v3, HTTPS, and SSH/SSL
- ▶ Auto Warning by Exception through E-mail, Relay Output
- ▶ Operating Temp -STD: -10~70°C, EOT: -40~75°C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' LMP-0800G-24 series is an 8-port industrial PoE+ managed Ethernet switch that is embedded with 8*10/100/1000Tx Ethernet ports that support IEEE802.3at/af for a maximum of 30W/port. The LMP-0800G-24 series is a fully manageable Layer 2 Ethernet switch that is pre-loaded with a user-friendly web management console design. It supports the ring network redundancy function using the market's open standard ITU-T G.8032 ERPS (Ethernet Ring Protection Switch) protocol that has a <50ms network recovery time. The advanced network filtering and security functions, such as, IGMP, VLAN, QoS, SNMP, RMON, Modbus TCP, and 802.1X/HTTPS/SSH/SSL increase determinism and improve network management for remote SCADA systems or control networks.

The LMP-0800G-24 series is IP30 rated and DIN-rail mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). This series supports a dual power input having a low voltage range (12~36VDC) and a built-in voltage booster allowing the unit to give a full 48VDC PoE power for any mobile PoE application or any low voltage power sourcing environment. It also provides high EFT and ESD protection for industrial networking applications, such as, power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance within transportation, ITS and any other outdoor or harsh environment.

DIMENSIONS

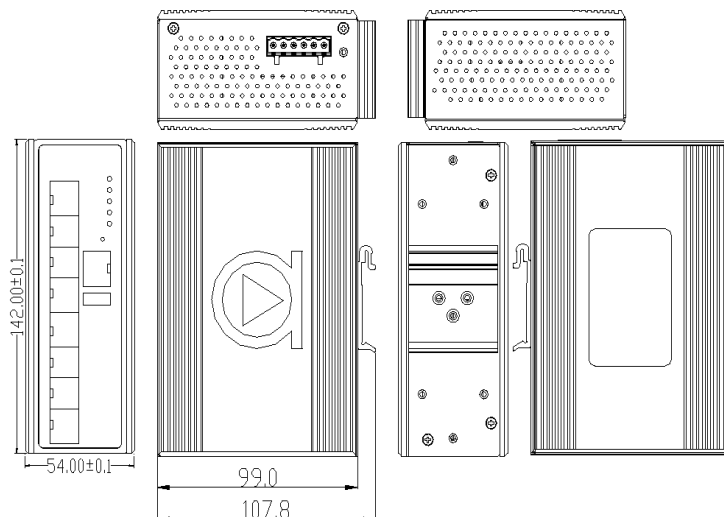

SPECIFICATIONS

Technology		IEEE 802.3 10Tx Ethernet IEEE 802.3u 100Tx Fast Ethernet IEEE 802.3ab 1000Tx Gigabit Ethernet IEEE 802.3x Flow Control for Full Duplex IEEE 802.3ad for Port Trunk with LACP IEEE 802.3at/af PoE (Power-over-Ethernet) IEEE 802.1d STP (Spanning Tree Protocol) IEEE 802.1w RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s MSTP (Multiple Spanning Tree Protocol) ITU-T G.8032/Y.1344 ERPS (Ethernet Ring Protection Switch) Protocol IEEE 802.1Q for VLAN Tagging IEEE 802.1x for Network Authentication IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization
Standards		IGMPv1/v2, SNMPv1/v2c/v3, TFTP, SMTP, SMTP, RMON, HTTP, HTTPS, Telnet, Syslog, DHCP Option 66/67/82, SSH/SSL, Modbus/TCP, LLDP, IPv4/IPv6, NAT, DHCP per port, SMTP, Quick ERPS, TLS
Protocol		
Switch Properties		
Switch Architecture	Back-Plane (Switching Fabric): 16.0Gbps	
Configuration	Web Console, Telnet, CLI	
Processing Type	Store and Forward	
Flow Control	IEEE 802.3x for full duplex mode, back pressure for half duplex mode	
Transfer Rate	14,880pps for 10Base-T Ethernet 148,800pps for 100Base-T Fast Ethernet 1,488,000pps for Gigabit Ethernet	
Packet Buffer	4 Mbits	
Jumbo Frame	9.6K	
MAC Table Size	8K	
VLAN Group	1 ~ 4094	
IGMP Group	Up to 256 Groups	
Port Interface		
Ethernet RJ45 Port	8*10/100/1000Tx (PSE: 30W/Port) auto negotiation speed, Full/Half duplex mode, and auto MDI connection	
RS232 Serial Console	1*RS232 in RJ45 connector with console cable, 115.2Kbps, 8,N,1	
Configuration Backup	1*USB 2.0	
Protection		
Overload Current	Present	
Power Reverse Polarity	Present	
CPU Watchdog	Present	
Network Cable		10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable; 100Base-TX: 2-pair UTP/STP Cat. 5 cable. EIA/TIA-568 100-ohm (100m) 1000BaseTX: UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)
Mechanical Characteristics		
LED Indicator	Per Unit: Power 1 & 2 (Green), Fault (Green/Red) PoE: Feeding Power (Green)	
Housing	Metal IP30 rated	
Dimension	54 x 142 x 99 mm	
Weight	Unit: 2.1 lbs.; Shipping: 2.9 lbs.	
Mounting	DIN-Rail; Wall-Mount (optional)	
Power Requirement		
Input Voltage	12~36VDC Redundant Input	
Power Connection	1 removable 6-contact terminal block	
PoE Power Output	25W/port @ 12VDC power input; 30W/port @ 24~36VDC power input	
Power Consumption	15 Watts (no PD included); 190 Watts @12VDC 255 Watts @36VDC	
Environmental Limits		
Operating Temperature	STD: -10 to 70°C EOT: -40 to 75°C	
Storage Temperature	-40°C ~ 85°C	
Ambient Relative Humidity	5 to 95%, (non-condensing)	
Regulatory Approvals		
EMI	FCC Class A	
EMS	IEC61000-4-2,3,4,5,6,8 IEC61000-6-2,4	
Free Fall	IEC60068-2-32	
Shock	IEC60068-2-27	
Vibration	IEC60068-2-6	
Green	RoHS Compliant	
Certifications	FCC, CE, UL 61010-1, UL 61010-2-201	
Warranty	5 Years	

ORDERING INFO

LMP-0800G-24	8-Port Industrial Gigabit PoE+ Managed Ethernet Switch with 8*10/100/1000Tx; 12~36VDC Power Input
LMP-0800G-24-T	8-Port Industrial Gigabit PoE+ Managed Ethernet Switch with 8*10/100/1000Tx; 12~36VDC Power Input; EOT: -40° to 75°C
Optional Accessories	
DR-75-24	75W Industrial Din Rail Power Supply (24VDC)
DR-120-24	120W Industrial Din Rail Power Supply (24VDC)
SDR-240-24	240W Industrial Din Rail Power Supply (24VDC)
SDR-480-24	480W Industrial Din Rail Power Supply (24VDC)
DIN-RACK-2U	Din-Rail to 19" Rack Mount Adapter for all Din-Rail Mountable Products, 2U Height

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660