


**10** **IMBA-Q170A**

ATX with 7th/6th Generation Intel® Core™ Processor, DDR4 DRAM, USB x 14, Supports iAMT 11.0

Industrial Motherboards

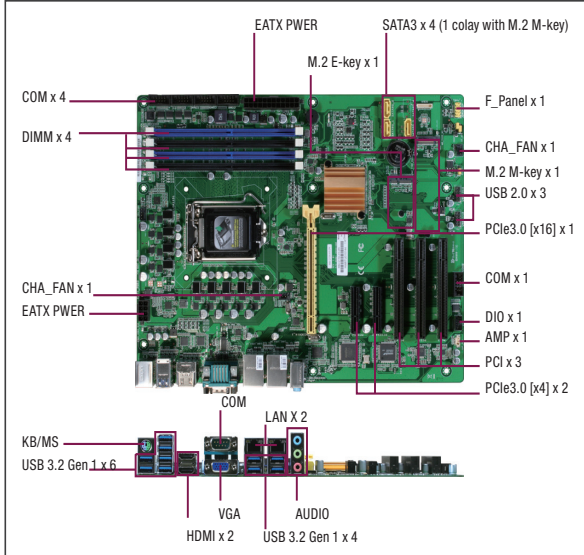

**Features**

- 7th/6th Generation Intel® Core™ LGA1151 Processor
- DDR4 DRAM Support, 2400 MHz, Max. 64GB
- Three Independent Display: HDMI x 2, VGA x 1
- Dual Intel® Gigabit Ethernet, LAN1 Supports iAMT 11.0
- PCIe [x16] x 1, PCIe [x4] x 2, PCI x 3
- M.2 Slot (M key) x 1, M.2 Slot (E key) x 1
- USB 3.2 Gen 1 Port x 10, USB 2.0 Port x 3



**Rear Panel I/O Ports**

USB	USB 3.2 Gen 1 x 10
Display I/O	HDMI x 2, VGA x 1
Audio I/O	Line-in, Mic-in, Line-out
LAN I/O	RJ-45 x 2
Serial Port	DB-9 COM x 1 (supports RS-232/422/485, 5V/12V/RI)
PS/2 Port	Stack Port (Keyboard & Mouse) x 1
Others	—

**Internal I/O Connectors**

Storage	Supports RAID 0/1/5/10 SKU1: SATA 6.0Gb/s x 3, M.2 M key (SATA) x 1 SKU2: SATA 6.0Gb/s x 4, M.2 M key (PCIex4) x 1
USB	USB 2.0 x 3
Display I/O	—
Audio I/O	Speaker header x 1 (Line-out)
Serial Port	RS-232 header x 5
PS/2 Port	—
Parallel Port	—
DIO	8-bit DIO x 1 (In/Out programmable)
FAN	4-pin CPU Fan x 1, 4-pin Chassis Fan x 2
Power	—
Others	Front panel header x 1, Clear CMOS jumper x 1, BIOS flash header (2[x4]P p=1.27mm) x 1, Chassis Intrusion x 1, AT/ATX mode select jumper x 1

**OS**

OS Support	Windows® 7 32/64-bit (not supported when a Kaby Lake processor is used), Windows® 8.1 64-bit (not supported when a Kaby Lake processor is used), Windows® 10 64-bit, Linux Fedora 64bit
------------	---


**Specifications**

System	
Processor	Intel® 7th/ 6th Generation(Kaby Lake-S/ Skylake-S) Core™ i7/i5/i3/Pentium®/ Celeron® 14nm LGA1151 Socket Processor
Chipset	Intel® Q170
Memory	288-pin DIMM x 4, max. 64GB, DDR4 2400/2133/1867, dual-channel
I/O Chipset	NCT6791D, F81216HD
Ethernet	LAN1: Intel® PHY I219LM Gb LAN (supports iAMT 11.0), LAN2: Intel® I210AT Gb LAN
Audio	Realtek® ALC897 6-Channel High Definition Audio CODEC
TPM	Nuvoton NPCT750AADYX TPM2.0 onboard (optional; default: onboard)
Expansion Slots	SKU1: PCIe [x16] x 1, PCIe [x4] (open edge) x 2, PCI x 3, M.2 E key (22 x 30mm) x 1, M.2 M key (22 x 80mm, for SATA) x 1 SKU2: PCIe [x16] x 1, PCIe [x4] (open edge) x 1, PCI x 3, M.2 E key x 1, M.2 M key (for SATA & PCIex4) x 1
BIOS	128M bit Flash ROM x 1, AMI BIOS
H/W Monitor	Temperature Monitor on CPU/Chassis, Voltage Monitor on Vcore/5V/3.3V/12V, Fan Monitor on CPU/Chassis
WatchDog Timer	1~255 steps by software program
Smart Fan Control	CPU Fan x1, Chassis Fan x 2
Wake On LAN/ PXE	Yes (WOL/PXE)
Power State	S3, S4, S5
Graphics	
Graphics Chipset	Intel® HD Graphics
Graphics Multi Display	VGA+HDMI, HDMI+HDMI, VGA+HDMI+HDMI
VGA	Up to 1920 x 1200 @60Hz
DVI	—
HDMI	HDMI 1.4 up to 4096 x 2304 @24Hz
Display Port	—
LVDS	—
eDP	—
Backlight Control	—
Environment & Power & ME	
Battery	Lithium battery
Power Requirement	24-pin ATX connector x 1, 8-pin ATX 12V Power connector x 1
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Storage Temperature	-40°F ~ 185°F (-40°C ~ 85°C)
Operating Humidity	0% ~ 90% RH, non-condensing
Certificate	CE & FCC Class A
Form Factor	ATX, 12" x 9.6" (305 mm x 244 mm)
Weight	1.76 lb (0.8 Kg)
MTBF (Hours)	219,970

**Packing List**


- 14001-00630100  
SATA 6G Cable (7P, 180; 90, 500mm 2 in1)
- 14001-00400100  
COM Port Cable (9P, 260mm, p=2.54mm w/bracket)
- I/O Shield
- IMBA-Q170A

**Block Diagram**

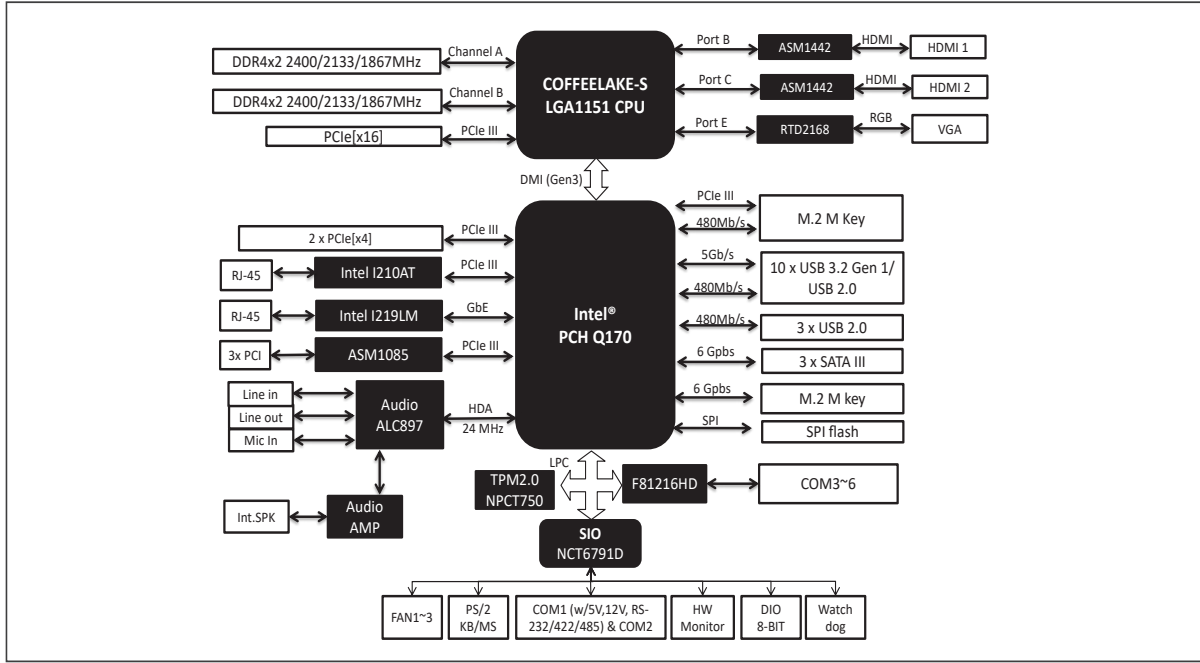

**Dimension**

Unit: mm

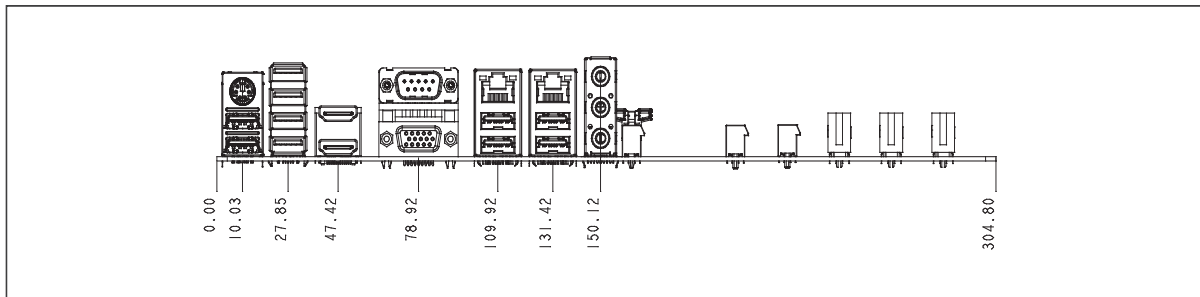

**Ordering Information**

PN	CPU	RAM	Fan/Fanless	Display	Storage	LVDS	LAN	USB	RS-232	RS-232/422/485	Expansion Slot	Power	TPM	Temp.
IMBA-Q170A-A11-2P4-210	LGA1151 socket	DDR4 2400	Fan	VGA x 1, HDMI x 2	M.2 M key 2280 x 1 (SATA module only), SATA3 x 3	-	GbE x 2	USB 3.2 Gen 1 x 10, USB2.0 x 3	5	1	PCIe(x16) x 1, PCIe (x4) x 2, PCI x 3, M.2 E key 2230 x 1	ATX	Onboard	32°F ~ 140°F (0°C ~ 60°C)

**Optional Accessories**

Part Number	Description
1709100330	USB 2.0 cable (9P, 330MM, p=2.54mm, w/bracket)
170910020K	USB 2.0 cable (9P, 330MM, p=2.54mm, w/o bracket)
175921156B	CPU Cooler (2-Ball, Push-pin Type)
1759200172	CPU Cooler (2-Ball, Screw with Retention Plate)

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660