




AMD® Ryzen™ V1000/R1000 Series Processor COM Express® Basic



GH960

**V1000
/R1000**

CPU Fan

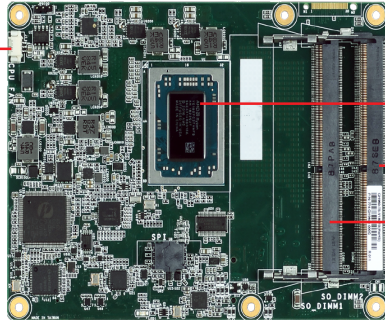

AMD® Ryzen™
V1000 Series

DDR4_2
SODIMM

DDR4_1
SODIMM

Features

- Dual channel DDR4 2400/3200MHz SODIMM up to 32GB
- Four display ports: VGA*/DDI + LVDS*/eDP + 2 DDI Supports three independent displays
- DP++ resolution supports up to 4096x2304 @ 60Hz
- Multiple expansion: 1 PCIe x8, 7 PCIe x1
- Rich I/O: 1 Intel GbE, 4 USB 3.1, 8 USB 2.0


* Populated by default



Mechanical Drawing

Coming Soon

Block Diagram

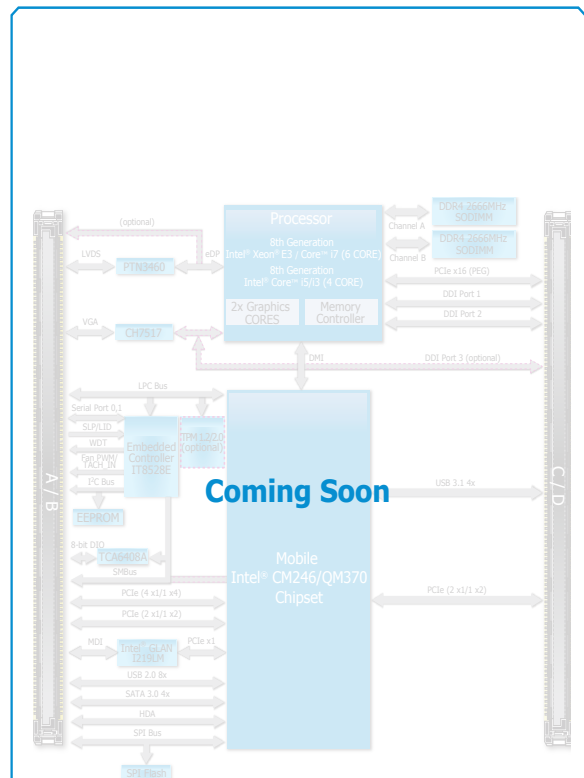

Coming Soon

PCIe L0~3				PCIe L4	PCIe L5	PCIe L6	PCIe L7
x4							
x2		x2					
x1	x1	x1	x1	x1	x1	x1	

* 7 x PCIe x1 or 2 x PCIe x2 or 1 x PCIe x4



Specifications

SYSTEM	Processor	AMD® Ryzen™ Embedded V1807, Quad Core, 2MB Cache, 11 CU, 3.35GHz (3.8GHz), 35-54W AMD® Ryzen™ Embedded V1756, Quad Core, 2MB Cache, 8 CU, 3.25GHz (3.6GHz), 35-54W AMD® Ryzen™ Embedded V1605, Quad Core, 2MB Cache, 8 CU, 2.0GHz (3.6GHz), 12-25W AMD® Ryzen™ Embedded V1202, Dual Core, 1MB Cache, 3 CU, 2.3GHz (3.2GHz), 12-25W AMD® Ryzen™ Embedded R1606G, Dual Core, 1MB Cache, 3 CU, 2.6GHz (3.5GHz), 12-25W AMD® Ryzen™ Embedded R1505G, Dual Core, 1MB Cache, 3 CU, 2.4GHz (3.3GHz), 12-25W	
	Memory	Two 260-pin SODIMM up to 32GB	Dual Channel DDR4 up to 2400/3200MHz
	BIOS	Insyde SPI 64Mbit	
GRAPHICS	Controller	AMD® Radeon™ Vega Graphics	
	Feature	OpenGL 4.5, DirectX 12, OpenCL 2.1 HW Decode: AVC/H.264, MPEG2, VC1/WMV9, JPEG/MJPEG, HEVC/H265, VP8, VP9 HW Encode: MPEG2, AVC/H264, JPEG, HEVC/H265, VP8, VP9	
	Display	1 x VGA/DDI (DDI available upon request) 1 x LVDS/eDP (eDP available upon request) 2 x DDI (HDMI/DVI/DP++)	VGA: resolution up to 1920x1200 @ 60Hz LVDS: dual channel 24-bit, resolution up to 1920x1200 @ 60Hz eDP: resolution up to 3840x2160 @ 60 Hz HDMI: resolution up to 2560x1600 @ 60Hz or 4096x2160 @ 24Hz DVI: resolution up to 1920x1200 @ 60Hz DP++: resolution up to 4096x2304 @ 60Hz
	Triple Displays	VGA + LVDS + DDI or VGA + DDI 1 + DDI 2 eDP + 2 DDI (available upon request)	
EXPANSION	Interface	1 x PCIe x8 (Gen 3) 7 x PCIe x1 or 2 x PCIe x2 or 1 x PCIe x4 1 x LPC 1 x I ² C 1 x SPI 1 x SMBus 2 x UART (TX/RX)	
		HD Audio	
AUDIO	Interface	HD Audio	
ETHERNET	Controller	1 x Intel® I210AT with iAMT12.0 PCIe (10/100/1000Mbps) (normal temp.) or 1 x Intel® I210IT with iAMT12.0 PCIe (10/100/1000Mbps) (wide temp.)	
I/O	USB	4 x USB 3.1 8 x USB 2.0	
	SATA	1 or 2 x SATA 3.0 (up to 6Gb/s)	RAID 0/1
	DIO	1 x 8-bit DIO (Default 4 inputs and 4 outputs)	
WATCHDOG TIMER	Output & Interval	System Reset, Programmable via Software from 1 to 255 Seconds	
SECURITY	TPM	TPM1.2/2.0 (Available Upon Request)	
POWER	Type	12V, 5VSB, VCC_RTC (ATX mode)	12V, VCC_RTC (AT mode)
	Consumption	TBD	
OS SUPPORT		Windows: Windows 10 IoT Enterprise 64-bit Linux	
ENVIRONMENT	Temperature	Operating: 0 to 60°C -40 to 85°C (with cooler)	Storage: -40 to 85°C
	Humidity	Operating: 5 to 90% RH	Storage: 5 to 90% RH
	MTBF	TBD	
MECHANICAL	Dimensions	COM Express® Basic	95mm (3.74") x 125mm (4.9")
	Compliance	PICMG COM Express® R3.0, Type 6	

Packing List

• 1 GH960 board	
• 1 DVD	
• 1 Cooler (Height: 36.58mm)	TBD

Optional Items

• carrier board kit	TBD
• Heat spreader (Height: 11mm)	TBD

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660