




Intel Atom[®] Processor E3900 Series Qseven



AL700

Atom

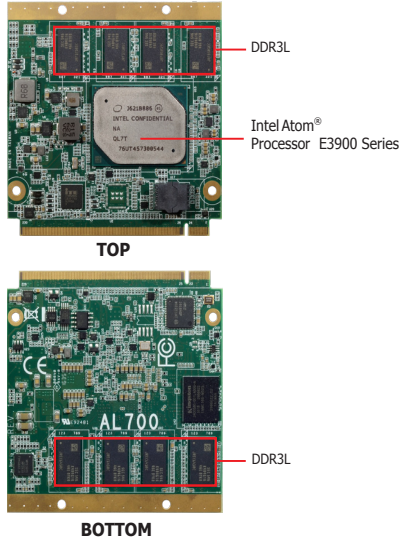


Features

- 4GB/8GB DDR3L Dual Channel Memory Down
- 1 DDI*, 1 LVDS*/(eDP + DDI)
- Supports triple displays: eDP+2DDI
- DP++ resolution supports up to 4096x2160 @ 60Hz
- Multiple expansions: 4 PCIe x1
- Rich I/O: 1 Intel GbE, 1 USB 3.0, 8 USB 2.0


* Populated by default



Mechanical Drawing

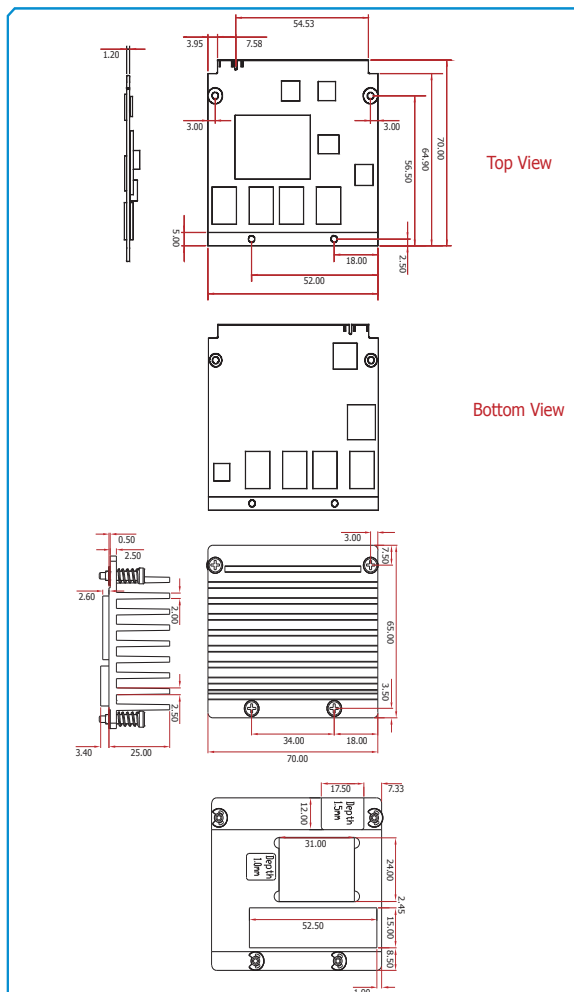

Block Diagram

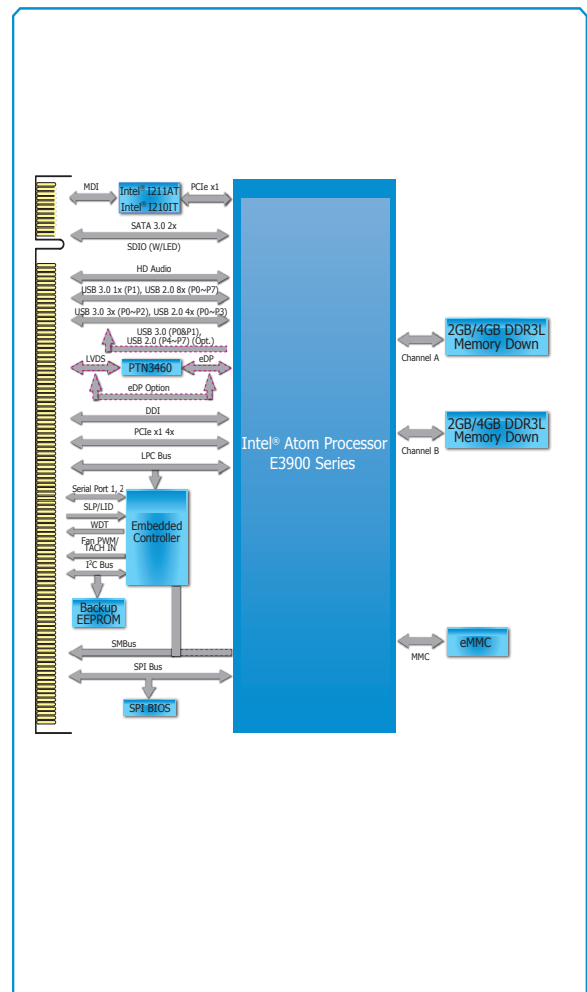

Intel Atom[®] Processor E3900 Series Qseven



AL700

Specifications

SYSTEM	Processor	Intel Atom [®] Processor E3900 Series, BGA 1296 Intel Atom [®] x7-E3950 Processor, Quad Core, 2M Cache, 1.6GHz (2.0GHz), 12W Intel Atom [®] x5-E3940 Processor, Quad Core, 2M Cache, 1.6GHz (1.8GHz), 9.5W Intel Atom [®] x5-E3930 Processor, Dual Core, 2M Cache, 1.3GHz (1.8GHz), 6.5W Intel [®] Pentium [®] Processor N4200, Quad Core, 2M Cache, 1.1GHz (2.5GHz), 6W Intel [®] Celeron [®] Processor N3350, Dual Core, 2M Cache, 1.1GHz (2.4GHz), 6W	
	Memory	4GB/8GB DDR3L Memory Down Dual Channel DDR3L 1600MHz	
	BIOS	AMI SPI 128Mbit (supports UEFI boot only)	
GRAPHICS	Controller	Intel [®] HD Graphics Gen9LP Series	
	Feature	OpenGL 5.0, DirectX 12, OpenCL 2.1 HW Decode: AVC/H.264, MPEG2, VC1/WMV9, JPEG/MJPEG, HEVC/H.265, VP8, VP9, MVC HW Encode: AVC/H.264, JPEG/MJPEG, HEVC/H.265, VP8, VP9, MVC	
	Display	1 x DDI (HDMI/DVI/DP++) 1 x LVDS/(eDP+DDI) (DDI available upon request)	LVDS: NXP PTN3460, 24-bit, dual channel, resolution up to 1920x1200 @ 60Hz HDMI: resolution up to 3840x2160 @ 30 Hz DP++: resolution up to 4096x2160@60Hz eDP: resolution up to 3840x2160 @ 60Hz
	Dual/Triple Display	LVDS + DDI (Dual) eDP + DDI (Dual)	eDP+2DDI (Triple) (available upon request)
EXPANSION	Interface	4 x PCIe x1 (Gen 2) 1 x SDIO (with LED) 1 x LPC 1 x I ² C 1 x SMBus 1 x SPI 1 x UART (TX/RX)	
AUDIO	Interface	HD Audio	
ETHERNET	Controller	1 x Intel [®] I211AT (10/100/1000Mbps) (0~60°C) 1 x Intel [®] I210IT (10/100/1000Mbps) (-40 to 85°C)	
I/O	USB	1 x USB 3.0 + 8 x USB 2.0 3 x USB 3.0 + 4 x USB 2.0 (option)	
	SATA	2 x SATA 3.0 (up to 6Gb/s)	
	eMMC	Supports up to 32GB eMMC eMMC 5.0, BGA-153 Ball 8~32G(MLC mode)	
	GPIO	1 x 4-bit GPIO	
WATCHDOG TIMER	Output & Interval	System Reset, Programmable via Software from 1 to 255 Seconds	
SECURITY	FTPM	Enables or Disables the BIOS support for the security device	
POWER	Type	5V, 5VSB, VCC_RTC	
	Consumption	Typical: E3940: 12V @ 0.53A (6.36W) Max.: E3940: 12V @ 1.78A (21.36W)	
OS SUPPORT (UEFI ONLY)		Windows 10 IoT Enterprise 64-bit Ubuntu 15.10 (Intel graphic driver available)	
ENVIRONMENT	Temperature	Operating: 0 to 60°C Storage: -40 to 85°C	
	Humidity	Operating: 5 to 90% RH Storage: 5 to 90% RH	
	MTBF	1,020,531 hrs @ 25°C; 583,481 hrs @ 45°C; 364,855 hrs @ 60°C Calculation model: Telcordia Issue 2 Environment: GB, GC – Ground Benign, Controlled	
MECHANICAL	Dimensions	Qseven form factor 70mm (2.76") x 70mm (2.76")	
	Compliance	Qseven specification revision 2.1	
CERTIFICATIONS		CE, FCC Class B, RoHS	

Ordering Information

Model Name	P/N	Processor	Memory	eMMC	LVDS/eDP	GbE	USB 3.0	USB 2.0	Power	Thermal	Temp.
AL700-T40-E40	770-AL7001-500G	x5-E3940	4 GB	N/A	LVDS	1	1	8	ATX/AT	Fanless	-40 to 85°C
AL700-T40-E30	770-AL7001-600G	x5-E3930	4 GB	N/A	LVDS	1	1	8	ATX/AT	Fanless	-40 to 85°C
AL700-B40-E50	770-AL7001-100G	x7-E3950	4 GB	N/A	LVDS	1	1	8	ATX/AT	Fanless	0 to 60°C

Note: N4200 and N3350 are supported upon request with MOQ requirement.

Packing List

• 1 AL700 board
• 1 DVD
• 1 Heat sink: TBD
• 1 QR Reference

Optional Items

• Qseven Carrier Board Q7X-151: 770-Q7X153-000G
• Heat spreader: TBD
• Bracket: A31-028001-200G
• Bulk Box: TBD

www.dfi.com

DFI reserves the right to change the specifications at any time prior to the product's release. Changes thereafter will be based on the product's revision. Please contact your sales representative for the exact revision offered in your area. All product names mentioned are trademarks of their respective companies. © October 31, 2018 DFI Inc.

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660