

VDM-101HD

10.1" In-Vehicle Monitor (16:10)

1280 x 800 High Resolution / 500 nits / 1000:1 Contrast Ratio / Projected Capacitive Touch / DC 9~48V / Front Panel IP65

Features

- Effortless One-Cable Connection
- 1280(H)×800(V) High Resolution
- High Brightness 500 Nits
- Secondary Video Input (HDMI)
- Projected Capacitive Multi-touch
- 9 ~ 48V DC Power Input
- Operating Temp.: -20 ~ 60°C
- Vehicle Regulation E-Mark



Introduction

VDM-101HD is a touch monitor with a wide power input voltage range and operating temperature dedicated to in-vehicle computing. An ideal operating terminal for fleet management and intelligent cockpit applications on commercial vehicles. The panel resolution of 1280 x 800 and typical brightness of 500 nits excel among other 10.1" monitors on the market. SINTRONES' proprietary cable design, which delivers video, audio, touch signal, and power in one cable connection, provides effortless deployment and installation.

Specification


LCD	
Screen Size / Ratio	10.1 inches / 16 : 10
Resolution	1280 (H) × 800 (V) RGB
Active Area (mm)	218.16 (H) × 136.80 (V) mm
View Angle (H/V)	80 / 80 / 80 / 80 Degree
Brightness (nits)	500 nits (typical)
Contrast Ratio	1000 : 1 (typical)
Backlight Type	LED
Touch	
Type	Projected Capacitive with Multi-touch
I/O	
Multi-IO	1 x DVI-D 29 pins Connector for DVI-D Single Link Video,
	Touch (USB 2.0), Line in, MIC out, and DC 9~48V Power input
	* SINTRONES custom pin definition for SINTRONES optional cable only
Secondary Video Input	1 x HDMI
Function Key	6 x Touch Hotkeys
Audio	
Microphone	2 x Built-in Digital MIC
Speaker	Stereo Speaker with Built-in Amplifier

Mechanical	
Dimension	247.84 (L) x 178.59 (W) x 36.36 (H) mm
Mounting	VESA MIS-D 75 mm
Weight	900g
IP Rating	(Front) IP65; (others) IP4X
Power Requirement	
Power Input	9V - 48V DC Power Input (Power input via DVI or Terminal Block Connector)
Environmental	
Operating Temp.	-20 °C ~ 60 °C with 0.6 m/s airflow
Storage Temp.	-40 °C ~ 80 °C
Relative Humidity	10% RH ~ 90% RH (non-condensing)
Vibration	IEC60068-2-64, random, 2.5G@5~500Hz, 1hr/axis
	MIL-STD-810G, Method 514.6, Procedure I, Cat.4, Operating
Shock	Operating: MIL-STD-810G, Method 516.6, Procedure I, Trucks and
	semi-trailers=15G (11ms)
Certifications	CE, FCC Class A, E-Mark

VDM-101HD

Dimensions

Unit: mm

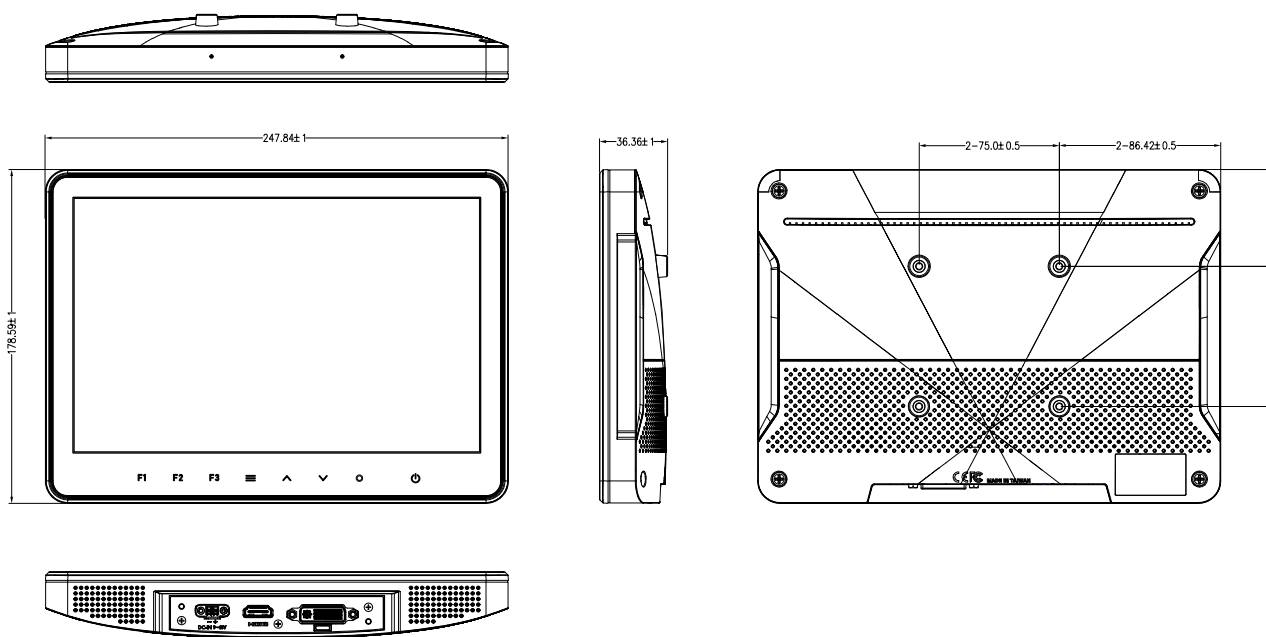

Ordering Information

Ordering Information	
Model Number	VDM-101HD
Description	16:10 10.1" 500nits In-Vehicle Monitor w/ P-CAP Multi-touch
State of Origin	Made in Taiwan

Optional Accessories

Optional Accessories	
DVI - DVI Cable	DVI to DVI SINTRONICS Custom Pin Define for VBOX-3630, VBOX-3122, VBOX-3131, SBOX-2622, SBOX-2602
DVI - 4 Ports Combo Cable	DVI to 4 Ports for VBOX-3611, VBOX-3130, VBOX-3121
DVI - 6 Ports Combo Cable	DVI to 6 Ports for ABOX-5210(G), ABOX-5200(G), ABOX-5000

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660