




# IMB-1211-L/ IMB-1211-D

## Mini-ITX Motherboard

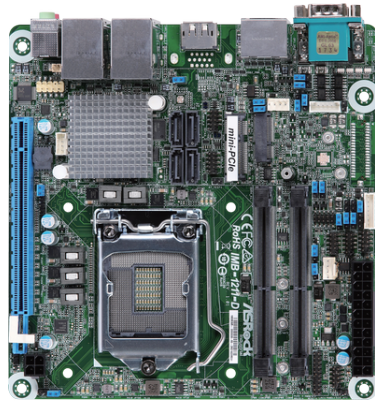

### KEY FEATURES

- Intel® 9<sup>th</sup>/ 8<sup>th</sup> Gen (Coffee Lake-S) Core™ Processors with Q370 chipset
- 2 x 260-pin SO-DIMM up to 64GB\* DDR4 2666MHz
- 1 x PCIe x16 (Gen3), 4 x USB 3.1 Gen1, 4 x USB 2.0, 1 x mini-PCIe, 1 x M.2 Key E, 1 x M.2 Key M, 5 x COM, 4 x SATA3
- 2 x Intel 1 Gigabit LAN
- Supports triple display, 2 x DP 1.2, 1 x VGA, 1 x LVDS (IMB-1211-L)
- Supports triple display, 3 x DP 1.2, 1 x eDP (IMB-1211-D)
- TPM 2.0 onboard IC
- Supports Intel® vPro, AMT, RAID 0/1/5/10
- ATX PWR



IMB-1211-L



IMB-1211-D

### SPECIFICATIONS

Form Factor	IMB-1211-L	IMB-1211-D
Dimensions	Mini-ITX (6.7-in x 6.7-in)	

#### Processor System

CPU	Intel® 9 <sup>th</sup> / 8 <sup>th</sup> Gen (Coffee Lake-S) Core™ Processors, up to 65W *The Performance of CPUs over 65W will be limited due to power design.
Chipset	Intel® Q370
Socket	LGA1151
BIOS	AMI SPI 128 Mbit

#### Memory

Technology	Dual Channel DDR4 2666 MHz
Capacity	64GB* * Intel Core i9/i7/i5 CPUs support up to 64GB (32GB per DIMM) Intel Core i3/Pentium/Celeron CPUs support up to 32GB (16GB per DIMM)
Socket	2 x 260-pin SO-DIMM

#### Graphics

Controller	Coffee Lake integrated graphics	
HDMI	N/A	
DisplayPort	DisplayPort 1.2, DP++ Max resolution up to 4096x2304@60Hz	
VGA	Max resolution up to 1920x1200@60Hz	N/A
LVDS	Dual channel 24 bit up to 1920x1200@60Hz	N/A
eDP	N/A	eDP 1.4 Max resolution up to 4096x2304@60Hz
DVI	N/A	
MultiDisplay	Triple Display	

#### Expansion Slot

PCIe	1 x PCIe x16 (Gen3, Support riser card x8/x8, x8/x4/x4)
PCI	N/A
mini-PCIe	1 x Full/Half size with PCIe x1 and USB 2.0
M.2	1 x M.2 (Key E, 2230) with PCIe x1, USB 2.0 and CNVi for Wireless
SIM Socket	N/A

#### Audio

Interface	Realtek ALC887/897, High Definition Audio. Line-out, Mic-in
-----------	---

#### Ethernet

Controller/ Speed	LAN1: 1 x Intel® I210 with 10/100/1000 Mbps LAN2: 1 x Intel® I219LM with 10/100/1000 Mbps, supports AMT/vPro
Connector	2 x RJ-45

Rear I/O	IMB-1211-L	IMB-1211-D
HDMI	N/A	
DisplayPort	2 x DP 1.2	3 x DP 1.2
VGA	1	N/A
DVI	N/A	
Ethernet	2 x 1 Gigabit LAN	
USB	4 x USB 3.1 (Gen1)	
Audio	2 (Mic-in, Line-out)	
COM	COM3, 4(RS-232/422/485)	
PS2	N/A	

#### Internal Connector

USB	4 x USB 2.0 (2 x 2.00 pitch header)	
COM	COM1, 2, 5(RS232)	
Parallel	N/A	
GPIO	4 x GPI, 4 x GPO	
TPM	TPM 2.0 onboard IC	
LVDS	1	N/A
eDP	N/A	1
VGA	N/A	
SATA PWR Output	N/A	
Speaker Header	1	

#### Storage

M.2	1 x M.2 (Key M, 2242/2260/2280) with PCIe x4 and SATA3 for SSD
mSATA	N/A
SATA	4 x SATA3 (6Gb/s)
RAID	Intel® SATA RAID 0/1/5/10
eMMC	N/A

#### Watchdog Timer

Output	From Super I/O to drag RESETCON#
Interval	256 Segments, 0, 1, 2, ...255sec

#### Power Requirements

Input PWR	ATX PWR (24+4-pin)
Power On	AT/ATX Supported - AT : Directly PWR on as power input ready - ATX : Press button to PWR on after power input ready

#### Environment

Operating Temp	0°C ~ 60°C
Storage Temp	-40° C ~ 85° C
Operating Humidity	5% ~ 90%
Storage Humidity	5% ~ 90%

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660