

W10IE3A-67H2-P(HB)

10.1" Intel® Celeron® N6211 G-WIN Full IP67 P-CAP Panel PC




KEY FEATURES

- Intel® Celeron® N6211 Processor 1.5M Cache, up to 2.60 GHz
- High Quality 10.1" Panel, 1280x800 resolution, 350 nits (Optional for 1000 nits)
- P-cap multi touch screen Optical Bonding with Panel to increase the clarity and transparency
- Optional Anti-Reflective Protection Glass Optical Bonding with Panel
- Dust/ Water proof design with VESA mount Full IP67 Panel PC
- Plastic Front Bezel with Anti-Corrosion Aluminum Die-Casting back cover
- Build in ambient Light sensor
- -10 to 55°C wide operating temperature
- Wide Range 9 to 36V DC Input. Optional for Ignition On/Off delay



OVERVIEW



Touch precision with Resistive Touch and Optical Bonding fusion

Winmate G-Win IP67 Series Panel PCs stand out by seamlessly integrating flat 5 wire resistive touch technology with optical bonding to reduce reflective glare, resulting in a cutting-edge touchscreen solution that not only ensures ruggedness and precision but also offers superior visual clarity. This innovative fusion caters perfectly to diverse environments such as outdoor kiosks, industrial control panels, and medical instruments, where reliability, durability, and top-notch display visibility are paramount.



Anti-Corrosion Aluminum Die-Casting Back Cover

Winmate G-Win IP67 Series has anti-corrosion aluminum die-casting back cover, designed specifically for the rigorous demands of the industrial sector. Crafted from high-quality aluminum, this back cover provides exceptional durability and resistance against corrosion, ensuring longevity even in harsh environments. Its robust construction guarantees reliable protection for sensitive components housed within, making it an ideal choice for industrial applications where reliability and longevity are paramount.



Adaptable Across Temperature Extremes

The G-Win IP67 Series panel PC is designed to function within a broad temperature range from -10°C to 55°C, making it suitable for use in outdoor or hazardous environments, regardless of extreme hot or cold conditions.



Convenient Mounting Installation

The industrial display offers versatile mounting options suitable for both wall and desk installations, facilitating straightforward setup and adaptability across diverse industries to meet specific needs.




IP67 Waterproof Design

The G-WIN GC series HMI panel PC is equipped with an IP67 front rating, ensuring durability against water and dust in challenging environments. This protective feature shields it from water splashes, dust, and other contaminants, preserving operational integrity. Operators can confidently deploy it in demanding industrial conditions, without worrying about moisture or dust-related damage, thus enhancing reliability and longevity for critical operations.

SPECIFICATIONS

System Specification			
WLAN	Support (Optional)	BT	Support (Optional)
Processor	Intel Celeron N6211 1.2GHz (up to 2.6GHz)	Memory	1 x SO-DIMM, DDR4 3200 MHz, 4GB

Storage	1 x M.2 2242 B-Key SSD 128GB 256GB (Optional) 512GB (Optional)	Ethernet controller	8GB (Optional) 16GB (Optional) 1 x Intel® Ethernet Controller
Security	TPM 2.0	Operating System	Windows 11 IoT Enterprise (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 22.04 (Optional)
Display			
Optional function	High brightness Panel for sunlight readable (Optional)	Resolution	1280x800
Size	10.1 inches	Contrast Ratio	800:1
Panel Brightness	1000.0 nits	View Angles	85,85,85,85
Active Area	216.96x135.6 mm	Touch / Glass	Projected Capacitive Multi Touch Screen Bonding With Panel Ture Flat Protection Glass Bonding With Panel (Optional)
Mechanical			
Dimension	263.9 x 172.6 x 40.4 mm	Weight	1.5 kg
Mounting	VESA mount	Enclosure	Plastic Front Bezel with Aluminum back cover Pre finish: Surtec 650, Type II, Class 3 Coating: Polyester powder coating
Cooling System	Fanless Design		
Environment			
Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	-10°C to 55°C
Storage Temperature	-30°C to 70°C	Shock	MIL-STD-810G Method 516.6 Procedure I
Vibration	MIL-STD-810G Method 514.6 Procedure I	IP rating	IP67
Certification			
Certification	CE, FCC		
IO Ports			
Power Input	1 x M12 waterproof connector for 9~36V DC	USB Port	1 x M12 waterproof connector for 2 x USB2.0
Serial Port	1 x M12 waterproof connector for RS232	LAN	1 x waterproof Giga LAN RJ45 connector
Indicator	1 x LED Indicator for power 1 x LED Indicator for storage		
Control			
Button	1 x "Power" key to power on the device. 1 x "+" key to increase screen brightness. 1 x "-" key to decrease screen brightness. 1 x "Menu" key to bring up the Winset Utility. 2 x programmable function keys that can be configured by Win-Set Utility		
Accessory			
Accessory	External open wire Power cable with waterproof connector External USB cable with waterproof connector External COM cable with waterproof connector External LAN cable with waterproof connector Waterproof caps RJ45 female-female converter VESA screws	Optional Accessory	100~240V AC to DC 84W Adapter with power cord (Optional)
Ordering Information			
Option	W10IE3A-67H2-G(HB) for Anti Reflective Protection Glass (Optional)		
DIMENSIONS UNIT:MM			

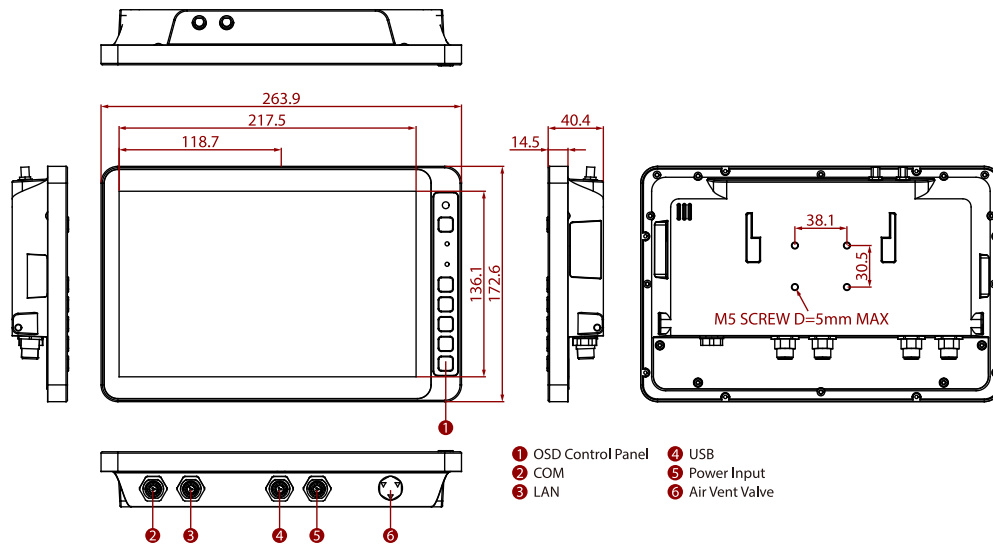

NOTE

1. This is a simplified drawing and some components are not marked in detail.
3. Weight of the device varies by configuration.
4. Please contact our sales representative if you need further product information.
5. All specifications are subject to change without prior notice.
6. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660