

# **entaira**°

## **ARS-7235-PSE-AC Series**

Industrial Dual Radio IEEE 802.11a/b/g/n/ac Wireless Access Point/Client/Bridge/Repeater/Router with 1\*PoE+/PSE Port (30W)







#### **Features**

- ► Industrial 2x2 MIMO
- ► Qualcomm IPQ4029 SoC
- ► Supports IEEE 802.11a/b/g/n/ac
- Supports 2\*10/100/1000 Base-TX WAN/LAN Ports with 1\*PoE+/PSE Port (30W)
- Tx Power 25dB for 2.4GHz
- Tx Power 24bB for 5GHz
- ► WPA, WPA2, WPA3, WEP, TKIP, AES
- ► Power Input: 9~48VDC in 6-Pin Terminal Block
- ► Reverse Polarity Protection
- ► IP30 Protection
- ► DIN-Rail and Wall Mountable
- ▶ Operating Temperature Range: STD: -10°C to 60°C; EOT: -35°C to 70°C
- 5-Year Warranty

Antaira Technologies' ARS-7235-PSE-AC Series is an industrial dual radio IEEE 802.11a/b/g/n/ac wireless LAN access point with added router capabilities and PSE (Power Sourcing Equipment) function providing up to 30 Watts of power to powered device. Embedded with the Qualcomm IPQ4029 SoC chipset, it boasts network robustness, stability, and a wide network coverage with a very low voltage input of 9V. Based on IEEE 802.11 a/b/g/n/ac, the access point supports high-speed data transmission of up to 867Mbps.

The ARS-7235-PSE-AC Series is capable of operating in different modes, which makes it suitable for a wide variety of wireless applications including long-distance deployments. The unit also allows the user to position the wireless antennas in a better signal-broadcasting location for improved wireless coverage and signal strength or simply in a more convenient location.

#### **DIMENSIONS** 0 Wall-mount kit (0) Φ 30(1.2) 10(0.4) 103.8(4.1) 16(0.6) 30(1.2) • o 000000 Ď. Ħ 140(5.5) 58.4(6.2) 0 0 0 95(3.7) 30(1.2) ø o Unit: mm (inch) Din-rail Wall-mount 0 0 Wall-mount kit

www.antaira.com

Toll-Free:1 (844) 268-2472


T: 1 (714) 671-9000

F: 1 (714) 671-9944



# **entaira**

### SPECIFICATIONS

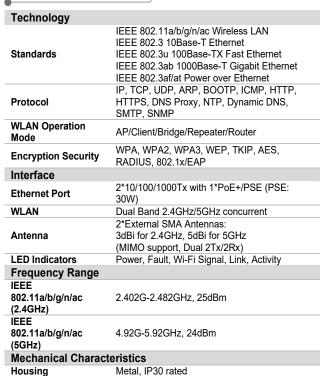

Power Requirement	
Input Voltage	9~48VDC Redundant Input
Power Connection	1 removable 6-contact terminal block
Reverse Polarity Protection	Present
Overload Current Protection	Present
System Power Consumption	3.5 Watts
<b>Environmental Limits</b>	
Operating Temperature	STD: -10°C to 60°C EOT: -35°C to 70°C
Storage Temperature	-40°C to 80°C
Ambient Relative Humidity	5 to 90%, (non-condensing)
<b>Regulatory Approvals</b>	
EMI	FCC Part 15 Subpart B CE EN55032
EMS	CE EN55024 IEC61000-4-2,3,4,5,6,8,11
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Certifications	FCC, CE
Warranty	5 Years

#### **ORDERING INFO**

**Dimensions** 

Weight

Mounting

ARS-7235-PSE-AC Industrial Dual Radio IEEE 802.11a/b/g/n/ac Wireless Access Point/Client/Bridge/Repeater/Router with 1\*PoE+/PSE Port (30W)

ARS-7235-PSE-AC-T Industrial Dual Radio IEEE 802.11a/b/g/n/ac Wireless Access Point/Client/Bridge/Repeater/Router with 1\*PoE+/PSE

Port (30W); EOT: -35°C to 70°C

30 x 140 x 95 mm (W x H x D)

DIN-Rail mounting, Wall mounting

Unit: 0.60 lb.

Shipping: 1.0 lb.







## **Assured Systems**

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

sales@assured-systems.com

Sales: +1 347 719 4508 Support: +1 347 719 4508

1309 Coffeen Ave Ste 1200 Sheridan WY 82801 USA

### **EMEA**

sales@assured-systems.com

Sales: +44 (0)1785 879 050 Support: +44 (0)1785 879 050

Unit A5 Douglas Park Stone Business Park Stone ST15 0YJ United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660