



DW SERIES

DW551DR4

55" Dual Side Digital Signage




3000 / 1000NITS
DUAL SIDED DESIGN



PORTRAIT &
LANDSCAPE



CEILING
SUSPENDED



FLOOR
MOUNTED



TRUECOLOR™
CALIBRATED

FOR MORE INFORMATION

For more information about DynaScan, visit our website at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.

DynaScan


65501 | V1.04

SPECIFICATION


MODEL	DW551DR4
PANEL	LCD Panel Type 54.64 inches LCD (x2) Native Resolution 1920 x 1080 Backlight LED Default Color Temperature D65 (6500 K) Brightness 1000 nits/ 3000 nits Color Depth 8 bits Contrast Ratio 3000:1 Response Time (Typ.) 9 ms Viewing Angle (H/V) 178° / 178° Light Life Time (Typ.) 100,000 hrs Panel Surface AR, 2H Blackening Defect Free Up to 110°C (230°F) Viewable With Polarized Lenses Yes
POWER	Power Supply Internal Rated Voltage 100-240V ~ 50/60Hz Power On Mode (Typ./ Max) 240 W / 380 W Power Saving Mode < 1 W
MECHANICAL SPECS	Bezel Width (T/B/L/R) Even bezel 29.5 mm Cabinet Color Black Monitor Dimension (LxHxD, w/o stand) 1272.8 x 743.3 x 62.7 mm Monitor Weight 40 kg Orientation Portrait/ Landscape Carrying Handles Yes
USER INTERFACE	Language English Support SNMP (Up to V3.0) Yes Dimming Control Yes Proof of Image Retention Yes Auto Orientation Sensor Yes Ambient Light Sensor Yes Power On/Off Scheduling Yes Internal Temperature Sensor Yes OSD Menu Rotation Yes
INPUT	HDMI 1.4b (HDCP 1.4) x2 (1080p) Display Port 1.2 x2 DVI-D x2 Micro SD Slot x2 (For Internal Player) USB 2.0 x2 (For Internal Player)
OUTPUT	Audio x2
EXTERNAL CONTROL	RS-232 In x2 RJ-45 x2 (LAN)
INTERNAL PLAYER	Operating System Android 7.1.2 Processor ARM Quad-Core Cortex-A7 Clock Speed 1.2 GHz Main Memory Interface DDR3L-1066, 1GB Graphics Mali-400MP2 GPU, Support OpenGL ES11/2.0 Storage Internal: Nand flash 8GB(multi sources) External: Support Micro SD, Up to 32GB Multimedia VP8/H265/H264 video decoders, up to 60fps 1080P other video decoders (VC-1, MPEG-1/2/4, VP8) Wi-Fi Specification 802.11 b/g/n 2412.0MHz - 2462.0MHz
ENVIRONMENT	Operating Temperature 0° C ~ 45° C Storage Temperature -20° C ~ 60° C Humidity 10% ~ 80% RH Non-condensing
CERTIFICATION	CE / FCC / RoHS

DIMENSIONS

Unit: mm [inch]

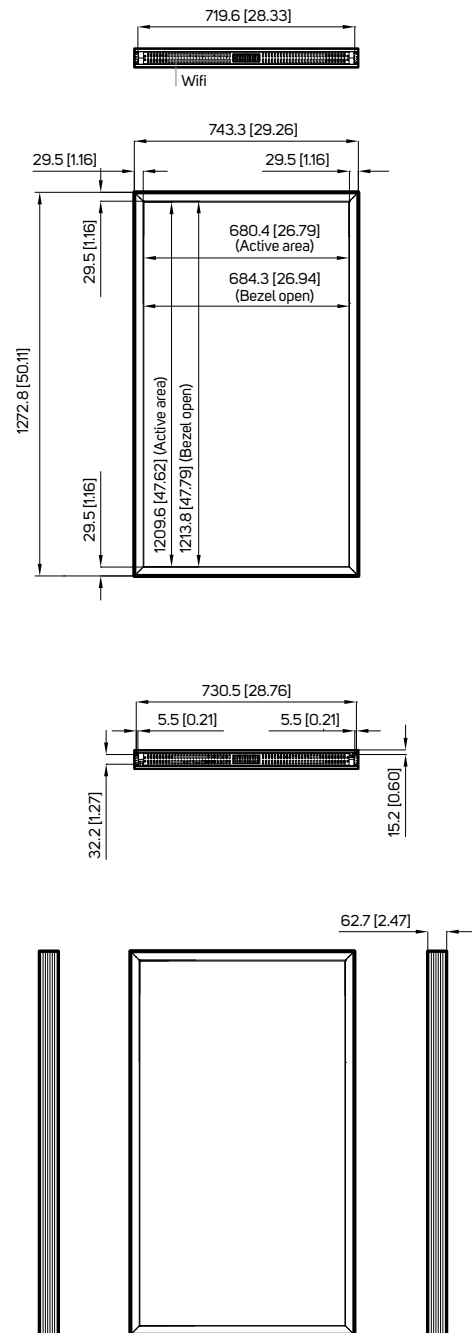

INTERFACE

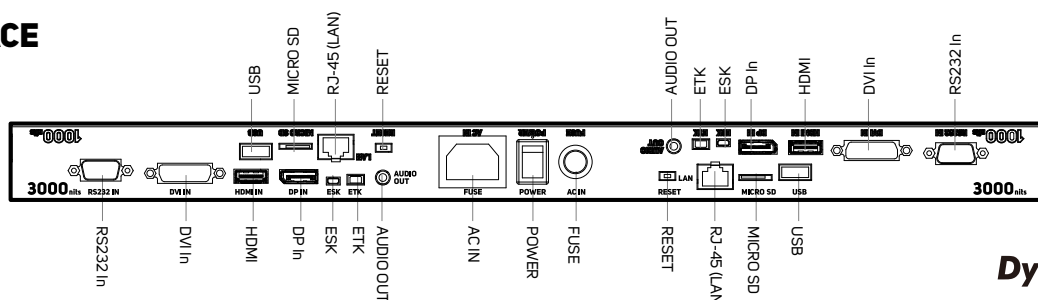

DynaScan

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660