

tBOX500-510-FL NEW

Fanless Embedded System with 7th Gen Intel® Core™ i7/i5/i3 & Celeron® Processors for Vehicle, Railway and Marine PC

Features

- CE (Class A), FCC, EN 50155, EN 50121, EN 45545-2, E-Mark and ISO 7637-2 certified; DNV 2.4 and IEC 60945 compliance
- 7th gen Intel® Core™ i7/i5/i3 & Celeron® processors (Kaby Lake)
- 2 VAM slots, wide selections (COM/LAN/DIO/PoE/CAN/BNC)
- External PoE PSU (optional), up to 120W power supply
- Fanless design and suitability for wide operating temperatures from -40°C to +70°C
- 12/24/48/72/96/110VDC power input
- Intelligent solution of vehicle power management (ACC ignition)
- 2 swappable 2.5" SATA drives



Specifications

Standard Color	Silver
Construction	Aluminum extrusion and heavy-duty steel, IP30
CPU	Intel® Core™ i7-7600U 2C @ 2.8 ~ 3.9 GHz Intel® Core™ i5-7300U 2C @ 2.6 ~ 3.5 GHz Intel® Core™ i3-7100U 2C @ 2.4 GHz Intel® Celeron® 3965U 2C @ 2.2 GHz
System Memory	2 x DDR4-1866/2133 SO-DIMM, up to 32GB
Chipset	SoC integrated
BIOS	AMI
System I/O Outlets	Rear Side Front Side
Watchdog Timer	255 levels, 1 ~ 255 sec.
Storage	2 x swappable 2.5" 7/9.5 mm SATA drive 1 x mSATA
RAID function	Intel® RAID 0/1
Expansion Interface	3 x full-size PCI Express Mini Card slot 2 x SIM Card slot 2 x Value-added module slot
System Indicator	1 x LED indicator for system power 1 x LED indicator for HDD activities 2 x programmable
Power Supply	9 ~ 36 VDC, typical: 12/24 VDC or 16.8 ~ 137.5 VDC, typical: 24/48/72/96/110 VDC
Power Consumption	PoE power output maximum 120W 15.4W/8 ports (802.3af), 30W/4 ports (802.3at)
Operating Temperature	-40°C ~ +70°C (-40°F ~ +158°F) with W.T. SSD -25°C ~ +55°C (-13°F ~ +131°F) with W.T. HDD
Humidity	5% ~ 95%, non-condensing
Vibration Endurance	5 Grms w/ SSD (5 ~ 500Hz, X/Y/Z direction; random) 1.5 Grms w/ HDD (5 ~ 500Hz, X/Y/Z direction; random)
Dimensions	321 mm (12.64") (W) x 210.2 mm (8.28") (D) x 73.3 mm (2.89") (H)
Weight	3.5 kg (7.72 lb)/4.5 kg (11.02 lb)
Certificates	CE (Class A), FCC, EN 50155, EN 50121, EN 45545-2, E-Mark and ISO 7637-2 certified; DNV 2.4 and IEC 60945 compliance
EOS support	Windows® 10 64-bit, Linux



▲ Front view



▲ Rear view

Ordering Information

Standard	
tBOX500-510-FL-Celeron-24-110MRDC 2018 Q3 available	Fanless railway embedded system, Intel® Celeron® 3965U 2.2 GHz processor, 4 USB 3.0, DVI-I, RJ-45 LAN, serial console, Mic-in/Line-out, two 2.5" SATA trays and 16.8 ~ 137.5VDC
tBOX500-510-FL-i3-24-110MRDC 2018 Q3 available	Fanless railway embedded system, Intel® Core™ i3-7100U 2.4 GHz processor, 4 USB 3.0, DVI-I, RJ-45 LAN, serial console, Mic-in/Line-out, two 2.5" SATA trays and 16.8 ~ 137.5VDC
tBOX500-510-FL-i5-24-110MRDC 2018 Q3 available	Fanless railway embedded system, Intel® Core™ i5-7300U 2.6 ~ 3.5 GHz processor, 4 USB 3.0, DVI-I, RJ-45 LAN, serial console, Mic-in/Line-out, two 2.5" SATA trays and 16.8 ~ 137.5VDC
tBOX500-510-FL-i7-24-110MRDC 2018 Q3 available	Fanless railway embedded system, Intel® Core™ i7-7600U 2.8 ~ 3.9 GHz processor, 4 USB 3.0, DVI-I, RJ-45 LAN, serial console, Mic-in/Line-out, two 2.5" SATA trays and 16.8 ~ 137.5VDC
tBOX500-510-FL-Celeron-TVDC 2018 Q3 available	Fanless vehicle embedded system, Intel® Celeron® 3965U 2.2 GHz processor, 4 USB 3.0, DVI-I, RJ-45 LAN, serial console, Mic-in/Line-out, two 2.5" SATA trays, 9 ~ 36VDC and ACC ignition
tBOX500-510-FL-i3-TVDC 2018 Q3 available	Fanless vehicle embedded system, Intel® Core™ i3-7100U 2.4 GHz processor, 4 USB 3.0, DVI-I, RJ-45 LAN, serial console, Mic-in/Line-out, two 2.5" SATA trays, 9 ~ 36VDC and ACC ignition
tBOX500-510-FL-i5-TVDC 2018 Q3 available	Fanless vehicle embedded system, Intel® Core™ i5-7300U 2.6 ~ 3.5 GHz processor, 4 USB 3.0, DVI-I, RJ-45 LAN, serial console, Mic-in/Line-out, two 2.5" SATA trays, 9 ~ 36VDC and ACC ignition
tBOX500-510-FL-i7-TVDC 2018 Q3 available	Fanless vehicle embedded system, Intel® Core™ i7-7600U 2.8 ~ 3.9 GHz processor, 4 USB 3.0, DVI-I, RJ-45 LAN, serial console, Mic-in/Line-out, two 2.5" SATA trays, 9 ~ 36VDC and ACC ignition
tBOX500-510-FL-Celeron-TMDC	Fanless marine embedded system, Intel® Celeron® 3965U 2.2 GHz processor, 4 USB 3.0, DVI-I, RJ-45 LAN, serial console, Mic-in/Line-out, two 2.5" SATA trays and 14 ~ 32VDC
tBOX500-510-FL-i3-TMDC	Fanless marine embedded system, Intel® Core™ i3-7100U 2.4 GHz processor, 4 USB 3.0, DVI-I, RJ-45 LAN, serial console, Mic-in/Line-out, two 2.5" SATA trays and 14 ~ 32VDC
tBOX500-510-FL-i5-TMDC	Fanless marine embedded system, Intel® Core™ i5-7300U 2.6 ~ 3.5 GHz processor, 4 USB 3.0, DVI-I, RJ-45 LAN, serial console, Mic-in/Line-out, two 2.5" SATA trays and 14 ~ 32VDC
tBOX500-510-FL-i7-TMDC	Fanless marine embedded system, Intel® Core™ i7-7600U 2.8 ~ 3.9 GHz processor, 4 USB 3.0, DVI-I, RJ-45 LAN, serial console, Mic-in/Line-out, two 2.5" SATA trays and 14 ~ 32VDC

Ordering Information

I/O Module Specification

Item	Spec
#1	4 x M12 A-coded GbE (P/N: E393718100) (PoE is optional, P/N: E393718101) tBOX500 module
	 
	VAM700 VAM701 (PoE/PoE+)
#2	4 x RJ-45 GbE (P/N: E393719100) (PoE is optional, P/N: E393719101) tBOX500 module
	 
	VAM702 VAM703 (PoE/PoE+)
#3	4 x 4-wire isolated RS-232/422/485 (P/N: E393720100) tBOX500 module
	
	VAM100
#4	4 x isolated CANbus 2.0A/B (P/N: E393734100) tBOX500 module
	
	VAM101


Power Protection

SCP (short circuit protection)
OVP (over voltage protection)
UVP (under voltage protection)
RVP (reverse voltage protection)

Vehicle Version

ISO 7637-2 pulse 1/2/3/4
Setting for battery protection: Low voltage or very low voltage
Setting for ignition control: Low voltage counter, ACC-ON delay or shut down delay

Dimensions

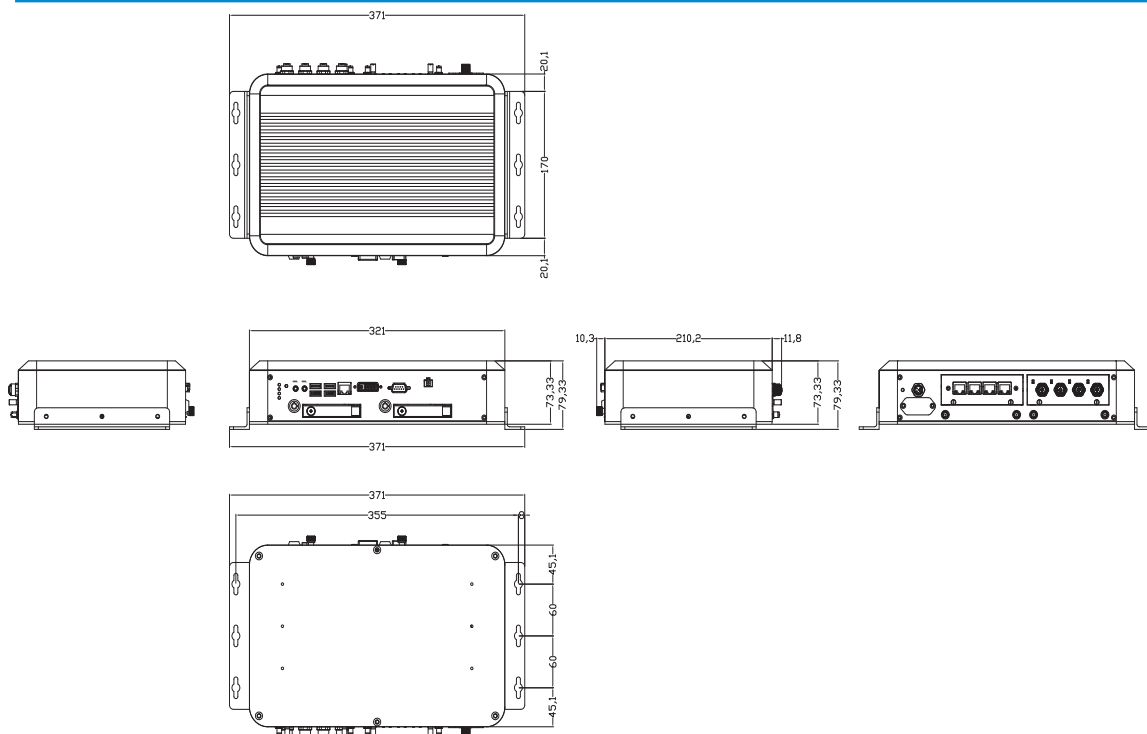

Updated Feb. 23, 2018. * All specifications and photos are subject to change without notice.

[axiomtek.com](#)



© 2018 Axiomtek Co., Ltd. All rights reserved.

122

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660