


#### Rugged Embedded

www.neousys-tech.com

# **IGT-20**

Industrial Grade ARM-based Smart Wireless IoT Gateway Device with ARM Cortex A8, Dual T-Flash (microSD), and pre-installed Debian

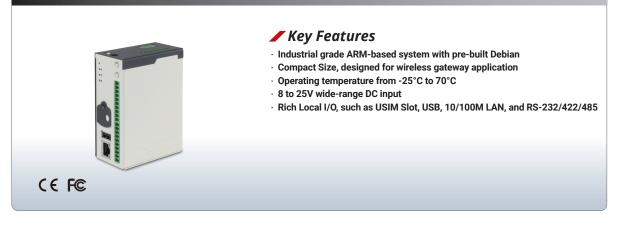

### Introduction

IGT-20 is an industrial grade system for gateway application, based on AM3352, the TI Sitara AM335x family, with pre-installed Debian. Unlike some SoMs provided as a PCB board, IGT-20 is shipped as a full system of industrial grade, compliant with certain common industrial certification, CE/FCC, shock and vibration. Besides, it takes a wide range of power input ranging from 8 to 25VDC. This also distinguishes itself from SoMs, which usually accepts only 5VDC.

IGT-20 equips with one USB2.0, one 10/100M LAN, two configurable RS-232/422/485, and one optional CAN Bus port. These cover a large portion of interfaces of industrial sensors. Additionally, there are 4 built-in isolated digital input channels, which accepts discrete signals from, for example proximity, sensors, as well as buttons. There are also four built-in isolated digital output channels to control actuators and indicators.

Having a mini PCIe slot and an USIM holder, IGT-20 can transmits acquired data and system status via 3G, 4G or WiFi technologies with an additional mini PCIe module. There is an antenna hole on top of IGT-20, enabling users wiring the SMA connector from the wireless module to the chassis. Regarding to the storage, IGT-20 takes a dual-microSD design. This not only enables users to separate system and user data, but also expedites OS deployment of mass production of users. As a gateway, there are six built-in user programmable LED indicators can reveal the status of IGT-20. Moreover, users can take advantage of the two user programmable buttons to manipulate IGT-20 even if no monitor and no keyboard/mouse.

### Specifications

System Core		
Processor	TI Sitara AM3352 1GHz Processor	
Memory	1GB DDR3L SDRAM	
DC Input Range	8~25V DC	
Front-panel I/O I	nterface	
Ethernet	1x 10/100M Ethernet	
SD Card	1x external T-flash socket support SDHC	
SIM Card	1x external SIM socket	
USB	1x USB2.0	
Isolated DIO	4-CH isolated DI and 4-CH isolated DO	
Console	1x 3-wire RS-232	
User LEDs	6x user programmable LEDs	
User Buttons	2x user programmable buttons	
Antenna Hole	1x antenna hole for Wifi and 3G/LTE	
Top I/O Interface		
DC-in	1x DC-input connector	
Power Button	1x power button	
Reset Button	1x reset button	
Serial Port	2x Software Configurable RS-232/422/485	
mSATA	1x internal half-sized mSATA (SATA + USB)	

Internal I/O Interf	Internal I/O Interface		
mPCle	1x Full size mPCIe with USB 2.0 only		
SD Card	1x internal T-flash socket support SDHC		
Software			
Operating System	Debian 8.6 pre-installed		
Mechanical			
Dimension	41mm(W) x 77mm(D) x 104mm(H)		
Weight	0.4 Kg		
Mounting	DIN-Rail mounting		
Environmental			
Operating Temperature	-25°C ~ 70°C		
Vibration	5Grms		
Shock	50Grms		
EMC	CE/FCC Class A		




All rights reserved. Copyright© 2017 Neousys Tech Inc.




# ASSURED

IGT-20

www.neousys-tech.com

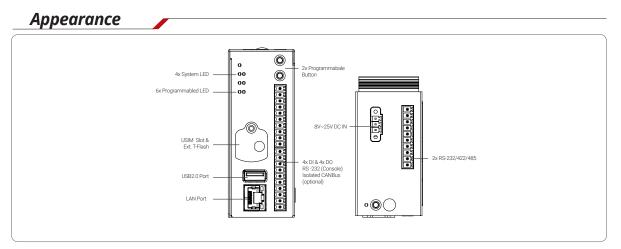



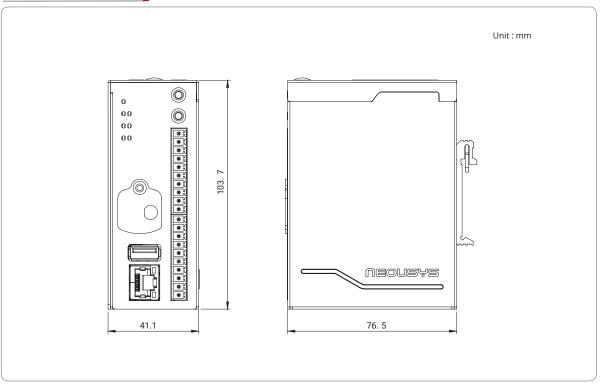

### **Ordering Information**

Model No.	Product Description
IGT-20	Industrial grade ARM-based IoT Gateway



All specifications and photos are subject to change without notice



# **Assured Systems**

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

## US

sales@assured-systems.com

Sales: +1 347 719 4508 Support: +1 347 719 4508

1309 Coffeen Ave Ste 1200 Sheridan WY 82801 USA

## **EMEA**

sales@assured-systems.com

Sales: +44 (0)1785 879 050 Support: +44 (0)1785 879 050

Unit A5 Douglas Park Stone Business Park Stone ST15 0YJ United Kingdom

VAT Number: 120 9546 28 Business Registration Number: 07699660