

R19IHAT-66EX-T

19" 800 nits ATEX Panel PC with Intel® Core™ i5-1135G7



KEY FEATURES

- 19" 800 nits LCD ATEX Panel PC
- Class 1, Division 2 & ATEX Zone 2 certified for hazardous area applications
- Intel® 11th Tiger Lake Core™ i5-1135G7 Processor
- Fanless design with streamlined enclosure for highly efficient heat dissipation
- Intelligent Heater for working in extreme cold environments -40°C




SPECIFICATIONS

System Specification			
Processor	Intel Core i5-1135G7 2.4GHz (up to 4.2GHz) Intel Core i7-1165G7 2.8GHz (up to 4.70 GHz) (Optional) Intel Core i3-1115G4E 3.0GHz (up to 3.90 GHz) (Optional) Intel Core i5-1145G7E 2.6GHz (up to 4.10 GHz) (Optional) Intel Core i7-1185G7E 2.8GHz (up to 4.40 GHz) (Optional)	Memory	1 x SO-DIMM, DDR4 3200 MHz, 4GB 8GB (Optional) 16GB (Optional) 32GB (Optional) 2 x SO-DIMM, DDR4 3200 MHz, 4GB (Optional) 8GB (Optional) 16GB (Optional) 32GB (Optional) 64GB (Optional)
Storage	1 x M.2 M-Key 2242 SATA SSD or 1 x M.2 M-Key 2280 NVMe SSD 128GB 256GB (Optional) 512GB (Optional) 1TB(for NVMe) (Optional) 2TB(for NVMe) (Optional) 4TB(for NVMe) (Optional) 1 x SATA III , up to 2TB (Optional)	Ethernet controller	2 x Intel® Ethernet Controller
Security	TPM 2.0	Operating System	Windows 11 IoT Enterprise SAC (64 bit) (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 20.04 (Optional) Linux Ubuntu 22.04 (Optional)
Display			
Touch / Glass	Projected Capacitive Multi Touch Screen Bonding With Panel	Resolution	1280x1024
Size	19 inches	Contrast Ratio	1000:1
Panel Brightness	800 nits 1000 nits(Optional)	View Angles	85,85,80,80
Active Area	376.32x301.06 mm		
Mechanical			
Dimension	474 x 410 x 111 mm	Mounting	Panel mount VESA Mount
Enclosure	Aluminum Housing	Cooling System	Fanless design
Cut out	462 x 386mm		
Environment			

Operating Humidity	5% to 95% RH, Non-Condensing	Operating Temperature	-40°C to 70°C (with intelligent heater)
Storage Temperature	-40°C to 70°C	Shock	MIL-STD-810G Method 516.6 Procedure I
Vibration	MIL-STD-810G Method 514.6 Procedure I	IP rating	IP66 Meet Standard IEC60529 (for Non-Hazardous location) IP54 Meet Standard IEC60079 (for Hazardous location)
Certification			
Certification	CE, FCC UL 62368-1 CSA C22.2 No. 62368-1-07 EN 62368-1 Class I, Div.2, Groups A,B,C,D T4 -40 <= Tamb <= 70 Meet Standards ANSI/ISA-12.12.01-2013 CSA Std. C22.2 No. 213-M1987 ATEX II 3G Ex nA ic IIC T4 Gc -40 <= Tamb <= 70 Meet Standards EN 60079-0, EN 60079-11, EN 60079-15 IECEX Ex nA ic IIC T4 Gc -40 <= Tamb <= 70 Meet Standards IEC 60079-0, IEC 60079-11, IEC 60079-15		
IO Ports			
Power Input	1 x 9~36V DC, 3-Pin Terminal Block	USB Port	1 x USB2.0, 4-Pin Terminal Block 1 x USB 3.2 Gen1x1 (Type A, only used in safe area) 2 x USB2.0 (Type A, only used in safe area)
Serial Port	1 x RS232/422/485, 10-Pin Terminal Block 1 x DB9 RS232(only used in safe area)	Video	1 x DB15 VGA(only used in safe area)
Expansion Port	1 x M.2 2232 E-Key Slot (for Wifi module) 1 x M.2 2242/2280 M-Key Slot (for NVME SSD or SATA III SSD) (SATAIII is only available when M.2 NVMe is not in use)	LAN	1 x LAN, , 8-Pin Terminal Block 1 x RJ45(only used in safe area)
Indicator	1 x LED Indicator for power 1 x LED Indicator for storage 1 x LED Indicator for heater 1 x LED Indicator for LAN 1 x LED Indicator for lock touch	Gland	2 x EX-Type Brass Cable Gland M16 (Cable range 7.5~10.2mm) 3 x EX-Type Brass Cable Gland M12 (Cable range 5.4~8mm)
Control			
Button	1 x Power Button 1 x Brightness up Button 1 x Brightness down Button 1 x Button for locking touch function 1 x Programmable function key		
Accessory			
Accessory	24V 150W AC to DC Adapter Power cord Open wired power cable for M12 cable Gland Open wired USB cable for M12 cable Gland Open wired LAN/COM cable for M16 cable Gland VESA Mounting Screws Mounting Clips & Screws 3 Pins Terminal Block For Power 8 Pins Terminal Block For LAN 4 Pins Terminal Block For USB 10 Pins Terminal Block For COM	Optional Accessory	SMA male to female extension cable for M12 cable Gland (Optional)

DIMENSIONS UNIT:MM

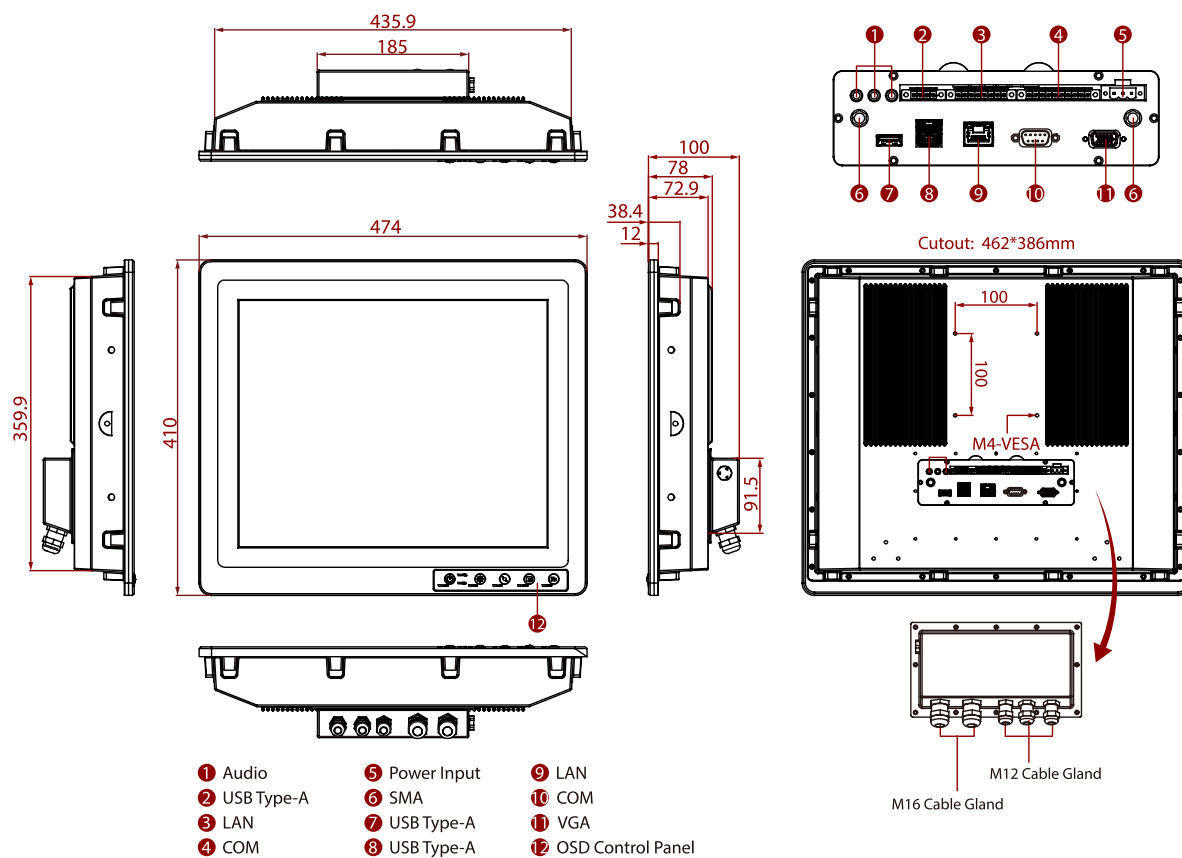

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660