



Industrial Solutions Partner!

SSF5745-INU / SSH5745-INU V1

57.4" Resizing LCD, 1000 nits LED backlight, 3840 x 807 ultra-wide aspect ratio 16:3.4

The SSF/SSH5745-INU is a 57.4 inch color TFT-LCD display with special aspect ratio 16:3.4 and wide resolution 3840 x 807. It is Litemax's Spanpixel series product which designed for high brightness 1000 nits with power efficiency LED backlight. It provides LCD panel with specific aspect ratios and sunlight readable for digital signage, public transportation, exhibition hall, department store, and vending machine.

Key Features

- Resizing LCD
- Ultra-Wide Screen (16 : 3.4)
- High Brightness 1000 nits
- Sunlight Readable
- LED Backlight
- Slim Bezel
- BL MTBF: 100,000 hours



Specifications

Model Name	SSF5745-INU / SSH5745-INU V1
Description	57.4" Resizing LCD, 1000 nits LED backlight, 3840x807
Screen Size	57.4"
Display Area (mm)	1428.5(H) x 300.2(V)
Brightness	1000 cd/m ²
Resolution	3840x807
Aspect Ratio	16 : 3.4
Contrast Ratio	5000 : 1
Pixel Pitch (mm)	0.374(H) x 0.374(V)
Pixel Per Inch (PPI)	67
Viewing Angle	178°(H), 178°(V)
Color Saturation (NTSC)	82%
Display Colors	1.07G
Response Time (Typical)	9.5ms
Panel Interface	V-by-One
AD Board Input Interface	DVI-D, HDMI, DP
AD Board Input Power	DC12V (DC24V optional)
Power Consumption	93W, (98W with AD Board)
OSD Key	5 Keys (Power Switch, Menu, +, -, Exit)
OSD Control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc
Dimensions (mm)	1462.5x 333.9 x 29.7
Bezel Size(U/B/L/R)	14.5/14.5/14.5/14.5 mm
Weight (Net)	8.5 kg
Operating Temperature	0 °C ~ 50 °C
Storage Temperature	-20 °C ~ 60 °C

SSF= Panel + LED Driving Board

SSH= Panel + LED Driving Board + AD Control Board

Specifications are subject to change without notice.

All brands or product names are trademarks or registered trademarks of their respective companies.




Industrial Solutions Partner!

Mechanical Drawing

Outline Dimensions

Unit: mm

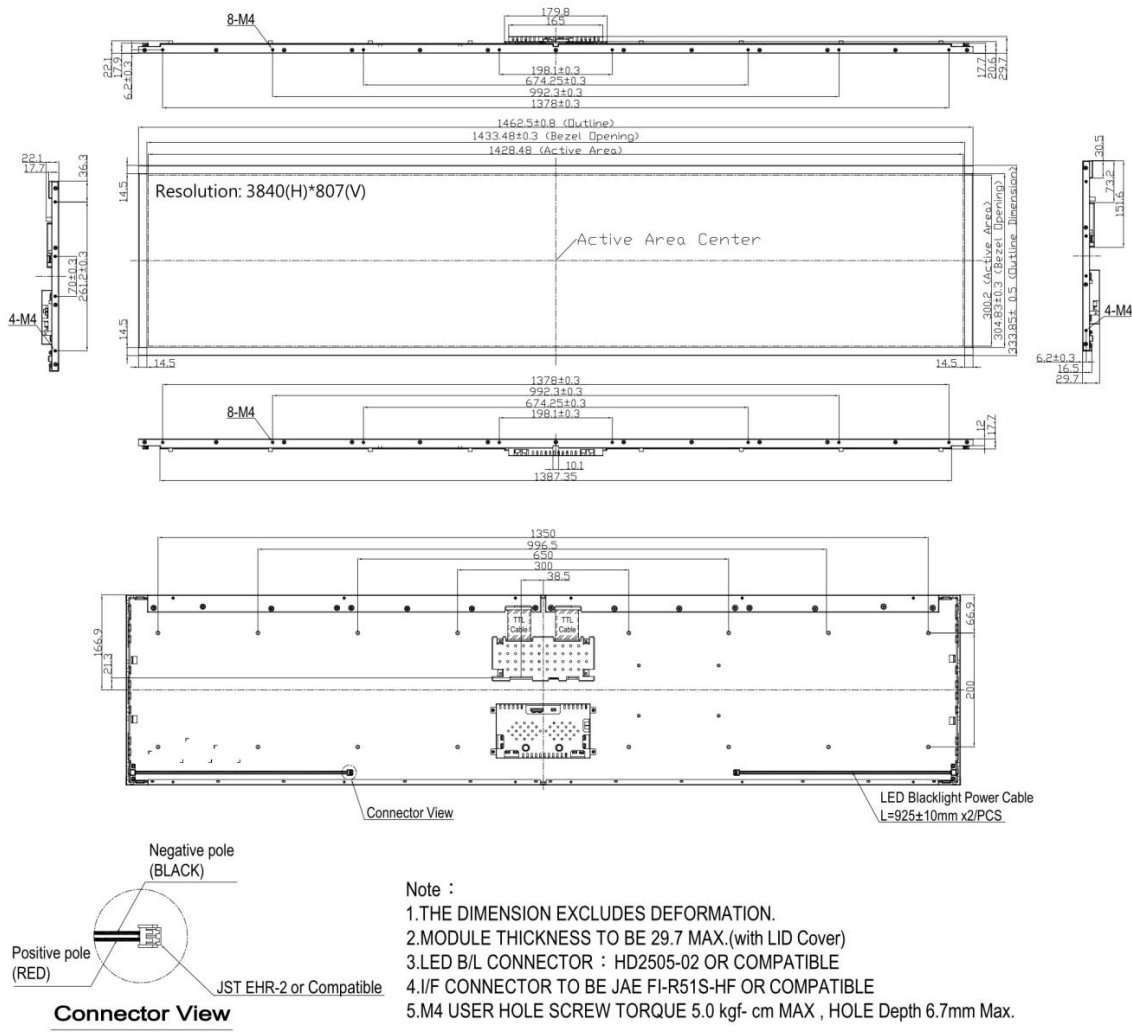

Note :

- 1.THE DIMENSION EXCLUDES DEFORMATION.
- 2.MODULE THICKNESS TO BE 29.7 MAX.(with LID Cover)
- 3.LED B/L CONNECTOR : HD2505-02 OR COMPATIBLE
- 4.I/F CONNECTOR TO BE JAE FI-R51S-HF OR COMPATIBLE
- 5.M4 USER HOLE SCREW TORQUE 5.0 kgf·cm MAX , HOLE Depth 6.7mm Max.



Industrial Solutions Partner!

Ordering Information

Part Number	Description
SSF5745-INU-A01	57.4",1000nits,3840*807,LID57A,3in1,V1
SSH5745-INU-M01	57.4",1000nits,3840*807,LID57A,AD9131DHP,AC100~240V,3in1,V1

Optional Accessories

Part Number	Description
810618301010	CABLE.POWER.AC.1830mm USA type
810618301090	CABLE,POWER,AC,1830mm Europe type
810618301050	CABLE.POWER.AC.1830mm UK type
810618301170	CABLE.POWER,AC,1830mm Australia type
810618301031	CABLE.POWER.AC.1830mm Japan type

By Customer Request

Glass	Tempered glass, AR coating.....
--------------	---------------------------------

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660