


AI Vehicle Computer

COMPACT AI Vehicle Series

Intelligent Machine Learning Unit with NVIDIA Jetson AGX Xavier

preliminary

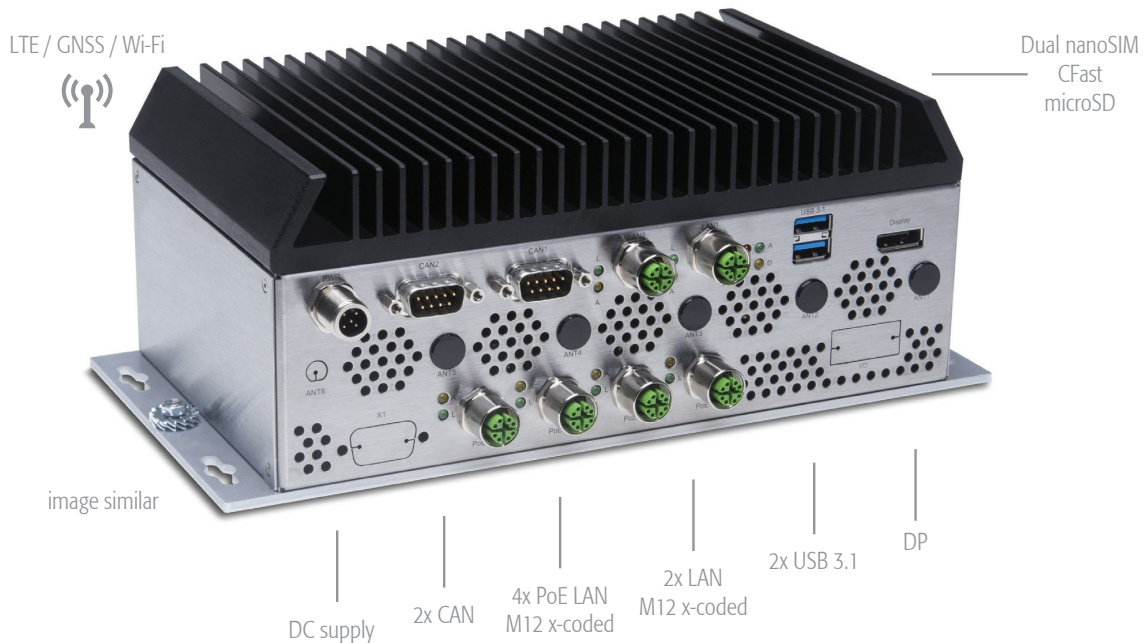

AI Vehicle Computer

IPC/COMPACT A3 - RML

This fanless RML COMPACT-A3 generation is based on the Jetson AGX Xavier processor module and offers a wide range of interface options.

The robust and uncompromising industrial design allows the implementation in the most demanding mobile AI applications and guarantees long term availability.

- Power over Ethernet (PoE+), 48VDC out
- 24/7 continuous operation
- Extended AI Computing
- Passively cooled, no moving parts
- Long term availability with fixed BOM

NVIDIA
Linux for Tegra (L4T)



Product Highlights

UNECE-R10 (E-mark) certified
Positioning capabilities with dead reckoning
Power ignition controller
Each LAN interface has its own dedicated NIC
Shock and vibration resistant
LTE and Wi-Fi connectivity options
No moving parts / passively cooled

Product Features

512-Core NVIDIA Volta™ GPU with 64 Tensor Cores
8-Core ARM v8.2 64-bit NVIDIA Carmel CPU
32GB 256-Bit LPDDR4x RAM soldered on board
Storage options: M.2 2280 & CFast
Ethernet, USB, CAN (J1939)
LTE, GNSS and WiFi
Aluminum & stainless steel housing

Industries

Automotive
Automated Guided Vehicles (AGV)
Transportation
Robotics
Off-highway vehicles

Order Code IPC/RMLA3K22-A203S¹ IPC/RMLA3K22-D203S¹

AI Vehicle Computer

Processor module / Performance

NVIDIA Jetson AGX Xavier (32GB) | 512-Core NVIDIA Volta™ GPU with 64 Tensor Cores
8-Core ARM v8.2 64-bit NVIDIA Carmel CPU

AI Performance 32 TOPs 32 TOPs

Memory / Storage

Data L3 Cache Size	4MB	4MB
256-Bit LPDDR4x RAM soldered on board	32GB	32GB
eMMC 5.1 Flash Storage on board	32GB	32GB
microSD Card socket	1	1
M.2 socket ²	1	1
CFAST socket with retention frame ²	1	1

Features

Inertial measurement unit (IMU) STMicroelectronics ISM330DHCXTR	•	•
Real time clock (RTC) with battery backup Renata CR2477 (950 mAh)	•	•
Real time clock (RTC) with goldcap backup (charge holds 48h)	optional	optional
Hardware Watchdog & Temperature supervisor	•	•
Buzzer	•	•

Communication Interfaces

Graphic interface	DisplayPort 1.2	DisplayPort 1.2
USB version 3.1 (Type A)	2	2
Internal USB version 2.0 OTG ^{behind the cover} (micro USB Type AB)	1	1
Ethernet 10/100/1000Mbit (M12 female x-coded)	2	2
Active/passive-CAN ESD protected, isolated (DSUB9)	2	2
Power over Ethernet - IEEE802.3at 10/100/1000Mbit (M12 female x-coded)	4	4
PSE - Power sourcing equipment, producing 48VDC out (total max power: 39W)	(total max power: 39W)	(total max power: 39W)
Serial RS232 / RS422/RS485 (DSUB9)	optional	none
Digital I/O's, 24VDC (up to 4 inputs & 4 outputs)	optional	none
Analog input, 16bit resolution, voltage input: -10 ... +10V / 0 ... 30V Accuracy: +/- 0.1%	optional	none
Analog input, 16bit resolution, current: 0-20mA (4 inputs)	optional	none
I2C bus ²	1	1
MIPI CSI-2 / GMSL2 / FPDLinkIII Camera interface ¹	on request	on request

Wireless Connectivity

Cellular 4G Module (LTE/UMTS/GSM) Sierra Wireless MC7455- M2M only! (full size miniPCle Slot)	2x SMA	none
GNSS Positioning module (GPS, Galileo, Glonass, Beidou) u-blox NEO-M8U module incl. acceleration sensor and gyroscope	1x SMA	none
Wireless LAN IEEE 802.11a/b/g/n/ac dual-band 2x2 MIMO Sparklan WPEB 263ACNI(BT) (half size MiniPCle Slot)	2x RP-SMA	none
High precision GNSS module ¹ u-blox ZED-F9P module	optional	none

Technical Data

Dimensions [mm] (housing, incl. mounting plate)	w255 x h103 x d125	w255 x h103 x d125
Net weight [gram]	~2300	~2300
Non isolated input voltage with ignition controller and reverse polarity protection (M12 5P male a-coded)	9 ... 36VDC	9 ... 36VDC
Power consumption typ. in Watt @ 24V without Add-Ins, idle	~15	~15

Environmental Conditions

Operating temperature ³	-25°C ... +60°C	-25°C ... +60°C
Storage temperature	-25°C ... +80°C	-25°C ... +80°C
Ingress protection standard according to EN60529 (ISO 20653)	IP20	IP20
Conformal coating ⁴	on request	on request
Road vehicles ⁵	UNECE-R10 (E-mark)	UNECE-R10 (E-mark)
Shock	EN60068-2-27	EN60068-2-27
Vibration	EN60068-2-64	EN60068-2-64
EMI-Conformity	EN55032 / EN55035	EN55032 / EN55035
Safety (designed to meet)	EN62368-1	EN62368-1
Radio and Telecommunication (designed to meet)	RED	RED
MTBF @ 25°C ambient ^{according to Telcordia SR-332, Environment GB, excluding battery}	~325 000h	~435 000h

¹ Please contact factory for minimum order quantities

² Internal connector

³ Depending on installation situation and interface connection. Please see user documentation.

⁴ On all possible components (excl. NVIDIA Xavier Module, connectors and wireless devices)

⁵ UNECE-R10 is the type-approval test for European automotive electronics. It includes a variety of testing including RF immunity and emissions, transient immunity and emissions. It also includes a requirement for burst, surge, harmonics & flicker and provides advice and requirements for electrical vehicles.

Product specifications subject to change without notice. | All data is for information purposes only and not guaranteed for legal purposes. Information in this data sheet has been carefully checked and is believed to be accurate. However, no responsibility is assumed for inaccuracies. Please refer to the user documentation for additional product specification.

© 2020 Syslogic Datentechnik AG
All rights reserved

Syslogic Datentechnik AG
Täferstrasse 28
CH-5405 Baden Dättwil

Version 0.6 | November 2020

For further information and support:
info@syslogic.com
support@syslogic.com
www.syslogic.com

+41 56 200 90 40
+49 7741 9671-420

Switzerland (Headquarters)
Germany and Austria

syslogic
industrial computing

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660