


LVC-5000

Fanless Mobile NVR with Intel 847E / i7-2655LE series
featuring 4 PoE Ports for Transport Surveillance

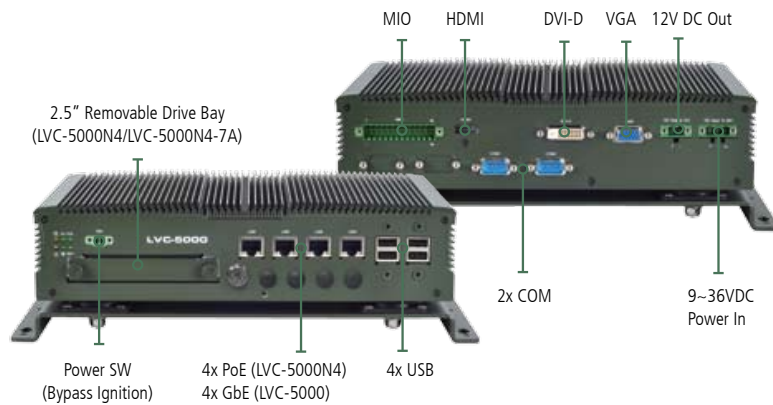

Features

Multiple PoE LAN ports to support Transport Surveillance

This mobile NVR with 4 PoE ports (IEEE 802.3af) is suitable for IP Video Surveillance and real-time recording applications.

Designed for MIL-STD-810G with Extreme Vibration Resistance

LVC-5000N4 series is in compliance with MIL-STD-810G vibration and shock standards and includes SSD storage and a Suspension Kit to further improve robustness.

Fanless Design with Corrugated Aluminum

The corrugated aluminum casing lets heat dissipate through the top of the device, allowing for a fanless design.

Convenient DC output

The LVC-5000 series offers 12VDC Output (max 1A) for external devices, operational in concert with the Ignition Power Management feature.

Vehicle Ignition Power Management

Detects vehicle ignition on/off status and allows flexible control of the delay time via software utility.

Modularized and customizable design

The LVC-5000 series design features the Lanner Proprietary Internal Multi-IO Interface, which carries signals for 2 USB ports, 4 x UART, 4 x Digital I/O, 2 x PCIe, and 1 x SATA 2.0. This allows for customized add-on modules for other features.

Key lock for Drive Bay

The system is with key lock for removable drive bay.


Settings and Installation via the front panel

MCU setting and CF card and SIM card installation is easy to access simply by opening the front panel.

Multi I/O

The MIO design includes 12V Level GPIO, audio, MCU TX/RX and also includes 2x DI (Digital Input from MCU) which can connect sensors to detect the environment. Once defined events occur, the LVC-5000 can be turned on automatically.

Dimensions: 273.8 x 64.8 x 188 mm (10.78" x 2.55" x 7.4")

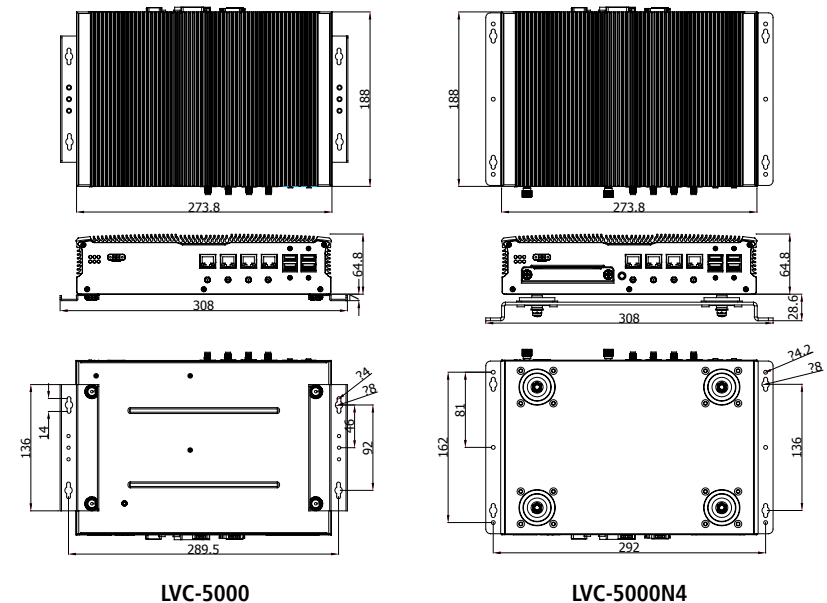

Preliminary Specifications

Dimensions (WxHxD)		273.8 x 64.8 x 188 mm (10.78" x 2.55" x 7.4")
Processor		Intel 847E/i7-2655LE Processors
Chipset		Intel HM65
System Memory	Technology	DDR3 SO-DIMM x1 (Factory default: 4GB module pre-installed)
	Max. Capacity	Up to 8GB (user option)
Storage	SATA/CF	Removable 2.5" SSD/HDD drive bay x1 for LVC-5000N4, Internal 2.5" SSD/HDD drive bay x1 for LVC-5000; CF socket x1
Ethernet Controller		Intel 82583V x4
Graphic Controller		Intel integrated HD graphic engine
Audio Controller		Realtek ALC886 HD codec
IO	LAN	GbE RJ45 x4
	Display	DVI-D, maximum resolution up to 1920x1200@75Hz
		VGA, maximum resolution up to 2048x1536@60Hz
	HDMI	HDMI, maximum resolution up to 1920x1200@75Hz
		Dual display function supports Independent, clone and extended mode.(VGA+DVI or VGA+HDMI)
	Audio	Mic-in and Line-out with 2 watt by terminal block MIO connector
	Serial I/O	1x RS-232 and 1x RS-232/422/485 both with RI/5V/12V
	GPS	Ublox NEO-6Q GPS receiver module
	G-sensor	ADXL 345
	GPIO	4x DI and 4xDO with 5V/12V Level by jumper setting
		2x DI (from MCU) 3.3V Level
	DO control	2x DO control relay with contact current @ 2A
	USB 2.0	Type A x4
Power Input		+9~36VDC input range, with ignition delay on/off control
PoE Power Module		LVC-5000N4 internal integrated
OS Support		Linux: Redhat Enterprise 5/ Fedora 14. Linux Kernel 2.6.18 or later Windows: XP embedded ; Win7 Pro FES/Embedded; Win8
Certifications		CE, FCC Class A, E13, RoHS
Compliance		Vibration: MIL-STD-810G, Method 514.6 Shock:MIL-STD-810G, Method 516.6
Operating Temperature Range	Extended	With Selected Industrial Components -20~-55°C/-4~-131°F
	Standard	With Commercial Components -5~45°C / 23~113°F

Lanner

Ordering Information

LVC-5000N4-7A	Intel® i7-2655LE In-Vehicle Mobile NVR Computer, 4GB DDR3 Memory included, 2.5" Removable Drive Bay, Mini-PCIe x2 with two SIM card reader, Intel GbE x4 with PoE support, USB x4, COM x2, MIO, Audio, HDMI, DC Power input +9~36Vdc with Ignition, Suspension Kit included.
LVC-5000N4	Intel® 847E In-Vehicle Mobile NVR Computer, 4GB DDR3 Memory included, 2.5" Removable Drive Bay, Mini-PCIe x2 with two SIM card reader, Intel GbE x4 with PoE support, USB x4, COM x2, MIO, Audio, HDMI, DC Power input +9~36Vdc with Ignition, Suspension Kit included.
LVC-5000	Intel® 847E In-Vehicle Computer, 4GB DDR3 Memory included, Internal 2.5" Drive Bay, Mini-PCIe x2 with two SIM card reader, Intel GbE x4, USB x4, COM x2, MIO, Audio, HDMI, DC Power input +9~36Vdc with Ignition, wall mount kit included.

connect@lannerinc.com | www.lannerinc.com

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660