

IMC-100A-XX Series

10/100TX to 100FX Industrial Media Converter



Features


- ▶ UTP to Fiber Media Converter
- ▶ Store-and-Forward Switching Architecture
- ▶ RJ45 Port Support Auto MDI/MDI-X Function
- ▶ Auto Negotiation Speed, Half/Full Duplex
- ▶ Reverse Polarity Power Protection
- ▶ Redundant Power Input Design: 12~36VDC
- ▶ Built-in 1 Relay Output for Power Failure Warning
- ▶ IP30 Rugged Metal Case Design
- ▶ DIN-Rail and Wall Mount Support Included
- ▶ Operating Temperature Range: STD: -10° to 70°C, EOT: -40° to 80°C
- ▶ UL Class 1, Division 2 Certified
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' IMC-100A series is an industrial grade unmanaged Ethernet media converter featuring a simple plug-and-play operation to quickly convert between Ethernet and fiber optics. The IMC-100A series supports fast Ethernet speeds of 100Mbps, featuring 1*10/100Tx Ethernet port and 1*100Fx fiber port. This unit is an ideal solution for applications looking to convert between an RJ45 Ethernet connection and a fiber connection.

IMC-100A series is IP30 rated and DIN-rail mountable. This product series supports a low voltage power input range of 12~48VDC. Also, there are two operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 80°C). It also provides Ethernet and fiber optic connectivity for outdoor or harsh industrial environment applications, such as, security surveillance, ITS-traffic monitoring systems, oil/gas and mining, facility management for power/utility, water wastewater treatment plants, and lastly, automated production lines in factory automation.

DIMENSIONS

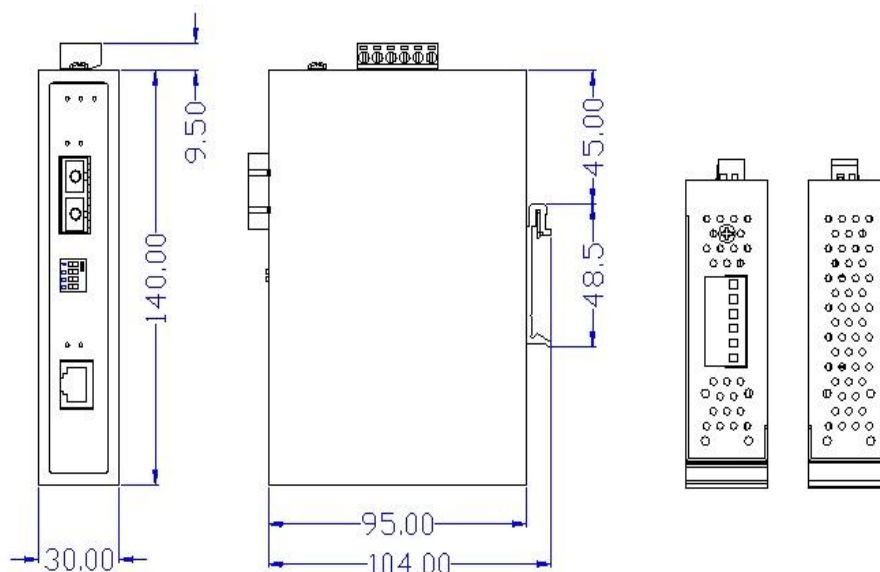

SPECIFICATIONS

Technology		Mechanical Characteristics	
Standards	IEEE 802.3 10BaseT Ethernet	Housing	Metal, IP30 rated
	IEEE 802.3u 100BaseTX/100BaseFX	Dimensions	30 x 140 x 95 mm
	IEEE 802.3x Flow Control and Back-Pressure	Weight	Unit: 0.95 lbs Shipping: 1.4 lbs
Processing Type	Store-and-Forward	Mounting	DIN-Rail, Wall-Mount (optional)
Protocol	CSMA/CD	Environmental Limits	
Flow Control	IEEE 802.3x back pressure flow control	Operating Temperature	STD: -10° to 70°C EOT: -40° to 80°C
Switch Properties		Storage Temperature	-40°~85°C
Switch Architecture	Back-Plane (Switching Fabric): 10.0Gbps	Ambient Relative Humidity	5 to 95%, (Non-condensing)
Transfer Rate	14,880pps for 10Base-T Ethernet 148,800pps for 100Base-T Fast Ethernet	Regulatory Approvals	
Interface		EMI	FCC Class A
Ethernet Port	1*10/100Tx auto negotiation speed, Full/Half duplex mode, and auto MDI connection	EMS	EN6100-4-2,3,4,5,6,8,11,12 EN6100-6-2,4
Fiber Parameters	Fiber Core: Multi-Mode (62.5/125um ~ 50/125um)	Free Fall	IEC60068-2-32
	Single-Mode (9/125um ~ 10/125um)	Shock	IEC60068-2-27
	Wavelength: 1310nm	Vibration	IEC60068-2-6
	Fiber Distance: Multi-Mode Fiber 2Km	Certifications	FCC, CE, UL Class 1 Division 2
	Single-Mode Fiber 30Km	Warranty	5 Years
Network Cable	WDM: Mode A Tx1310nm Rx1550nm		
	WDM: Mode B Tx1550nm Rx1310nm		
	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable;		
	100Base-TX: 2-pair UTP/STP Cat. 5 cable.		
	EIA/TIA-568 100-ohm (100m)		
Power Requirement	1000BaseTX: UTP/STP Cat.5/5E cable;		
	EIA/TIA-568 100-ohm (100m)		
Input Voltage	12~48VDC Redundant Input		
Power Connection	1 removable 6-contact terminal block		
Reverse Polarity Protection	Present		
Overload Current Protection	Present		
Power Consumption	2.74 Watts		

ORDERING INFO

IMC-100A-M	10/100TX to 10/100FX Industrial Media Converter, Multi-Mode 2km, SC Connector
IMC-100A-M-T	10/100TX to 10/100FX Industrial Media Converter, Multi-Mode 2km, SC Connector, EOT: -40°~80°C
IMC-100A-S3	10/100TX to 10/100FX Industrial Media Converter, Single Mode 30km, SC Connector
IMC-100A-S3-T	10/100TX to 10/100FX Industrial Media Converter, Single Mode 30km, SC Connector, EOT: -40°~80°C
IMC-100A-ST-M	10/100TX to 10/100FX Industrial Media Converter, Multi-Mode 2km, ST Connector
IMC-100A-ST-M-T	10/100TX to 10/100FX Industrial Media Converter, Multi-Mode 2km, ST Connector, EOT: -40°~80°C
IMC-100A-ST-S3	10/100TX to 10/100FX Industrial Media Converter, Single Mode 30km
IMC-100A-ST-S3-T	10/100TX to 10/100FX Industrial Media Converter, Single Mode 30km, EOT: -40°~80°C
IMC-100A-WA-S2	10/100TX to 10/100FX Industrial Media Converter, Single Fiber (WDM-A), Single Mode 20km, TX1310nm - RX1550nm
IMC-100A-WB-S2	10/100TX to 10/100FX Industrial Media Converter, Single Fiber (WDM-B), Single Mode 20km, TX1550nm - RX1310nm
Optional Accessories	
DR-45-24	45 Watt Series Industrial Single Output DIN-Rail Power Supply - 24 VDC / 2.0 Amps
DR-75-24	75 Watt Industrial Single Output DIN-Rail Power Supply - 24 VDC / 3.2 Amps
DR-120-24	120 Watt Industrial Single Output DIN-Rail Power Supply - 24 VDC / 5.0 Amps

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660