



DS SERIES

DS431LT4


43" 2500 nits High Brightness Digital Signage Display



**SUNLIGHT
VIEWABLE IMAGE**



**NARROW
BEZEL**



**BUILT-IN
MEDIA PLAYER**



**TRUECOLOR™
CALIBRATED**



**LOW POWER
CONSUMPTION**

Android is a trademark of Google LLC.
The Android robot is reproduced or modified from work created and shared by Google and used according to terms described in the Creative Commons 3.0 Attribution License.

FOR MORE INFORMATION

For more information about DynaScan, visit our website at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.

DynaScan


V1.02

SPECIFICATION


MODEL	DS43ILT4	
PANEL	LCD Panel Size	42.5"
	Native Resolution	1920 x 1080
	Brightness	2500 nits
	Color Depth	8 bits
	Contrast Ratio	4000:1
	Response Time (Typ.)	8 ms
	Viewing Angle	178° / 178°
	Light Lifetime (Typ.)	100,000 hrs
POWER	Blackening Defect Free	Up to 110°C (230°F)
	Power Supply	Internal
	Rated Voltage	100-240V ~ 50/60HZ
	Power Consumption (Max.)	220 W
MECHANICAL SPECS	Power Saving Mode	< 1 W
	Bezel Width (T/B/L/R)	8.7 / 8.7 / 8.7 / 8.7 mm
	Cabinet Color	Black
	Monitor Dimension (LxHxD)	962.1 x 552.0 x 77.4 mm
	Monitor Weight	18.1 kg
	Orientation	Portrait / Landscape
	VESA Mounting (LxH)	400 x 200 mm
	Carrying Handles	Yes
FEATURE	Language	English
	Support SNMP (Up to V3.0)	Yes
	Image Retention Protection	Yes
	Auto Orientation Sensor	Yes
	Ambient Light Sensor	Yes
	Power On/Off Scheduling	Yes
INPUT	OSD Menu Rotation	Yes
	HDMI 2.1 (HDCP 2.2)	x2 (1080p recommended)
	USB 2.0	x2
OUTPUT	Audio	x1
	RS-232	In x1
EXTERNAL CONTROL	RJ-45	x1 (LAN)
	ETK Port (Thermal)	x1
	ESK Port (IR, Ambient)	x1
	ESK Port (IR, Ambient)	x1
ENVIRONMENT	Operating Temperature	0°~ 45° C
	Storage Temperature	-20°~60° C
	Humidity	10% ~ 80% RH Non-condensing
INTERNAL PLAYER	Operating System	Android 11.0
	Processor	Quad-core A53
	Clock Speed	1.5GHz
	Main Memory Interface	DDR4, 2GB
	Graphics	Mali G52
	Storage	Internal: 8GB eMMC Flash
	Multimedia	4K video decoders, 30/60fps H.264 /VP9 10bit, MPEG-1/2/4
ACCESSORY	Quick Start Guide. Power Cord. Remote Control. Batteries. IR & Ambient Sensor	
CERTIFICATION	CE / CB / FCC / ETL / RCM / RoHS / PSE / VCCI	

DIMENSIONS

Unit: mm [inch]

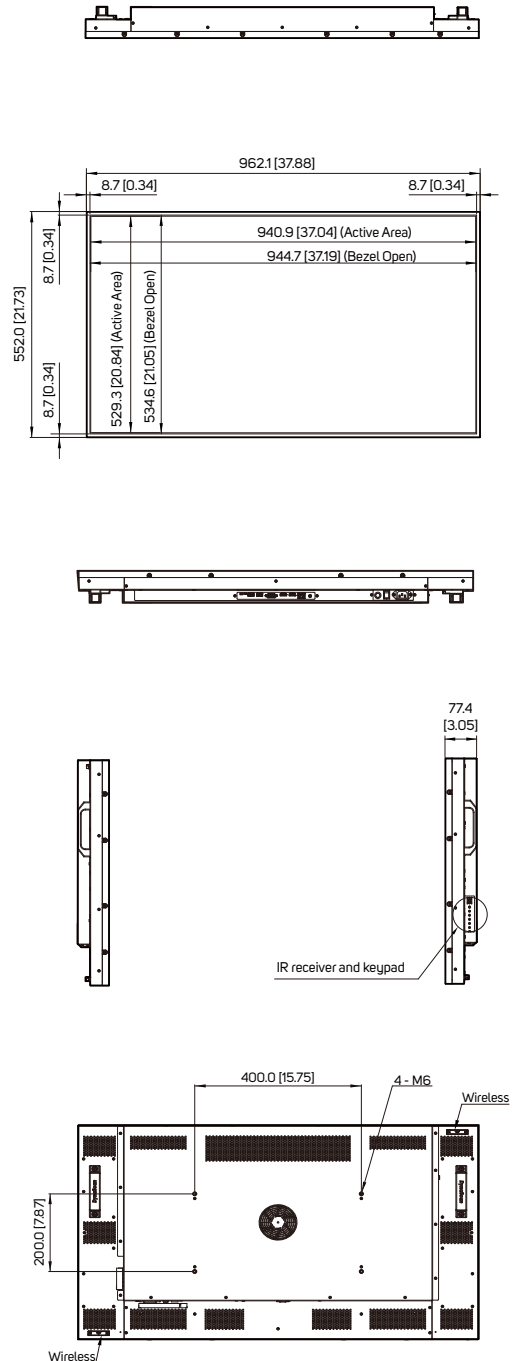

INTERFACE

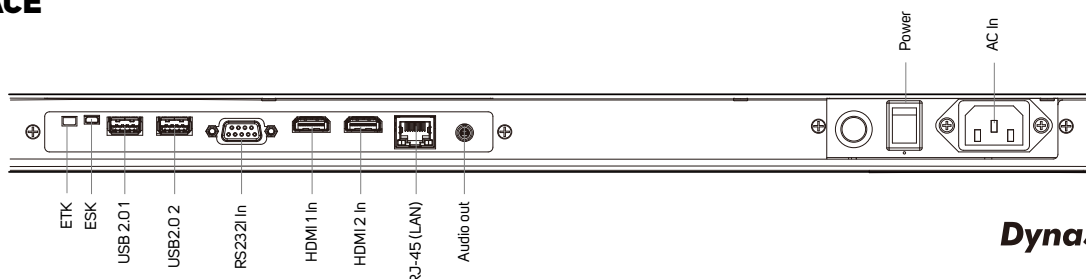

DynaScan

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660