


Infinitely Expandable Video Wall Solution

WORLD'S NARROWEST 3D LED VIDEO WALL WV70MD



NARROWEST BEZEL

The narrowest bezel creates powerful and impactful video walls that can be easily installed, maintained and managed.

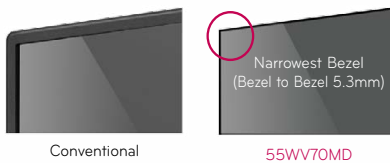

HIGH PICTURE QUALITY

Clear & vivid picture with deeper black - World's best dynamic CR (500,000 : 1 ↑)



Providing clear image virtually at any angle




AUTO CALIBRATION

Auto calibration software bundled will help you to get the perfect color and brightness uniformity.



24/7 OPERATION

The strength of PD Module is that it can operate 24 hours a day. It is highly durable and provides continuous performance.



LOW POWER CONSUMPTION

Annual costs saving of €507,730 @ 3X3 Video Wall.

	Annual Saving	3Yr. Saving
1 unit	3 X 3	3 X 3
Costs	56,414	507,730
Electricity(kW)	438	3,942
	11,826	

*24hrs/day, €0.1288/kWh (Industry rate @ Germany)

WORLD'S NARROWEST 3D LED VIDEO WALL

WV70MD 55"



FEATURES

- 3D (FPR Type)
- Narrowest Bezel : 5.3mm (Bezel to Bezel)
- Slim Depth : 99mm
- 450nit (2D), 170nit (3D)
- Auto Calibration (SuperSign Elite-c)
- Wide Viewing Angle
- Smart Energy Saving (Low Power Consumption)

SPECIFICATIONS

55WV70MD

PANEL	Screen Size	55" (54.64" measured diagonal)
	Panel Technology	IPS (LED BLU)
	Aspect Ratio	16 : 9
	Native Resolution	1,920 x 1,080 (FHD)
	Brightness	450nit (2D) / 170nit (3D)
	Contrast Ratio	1,400 : 1
	Dynamic CR	500,000 : 1
	Viewing Angle (H x V)	178 x 178
	Response Time	8ms (G to G, *WOT)
	Input (Rear)	DVI-D(I), HDMI(I), Display Port(I) with HDCP for all input
CONNECTIVITY	Digital	DVI-D(I), HDMI(I), Display Port(I) with HDCP for all input
	Analog	RGB(I), Shared Component(I), AV(I)
	Audio	PC Audio In(I)
	External Control	RS232C(I), RJ45(I), IR Receiver(I)
	USB	USB(I)
	Output (Rear)	
	Digital	DVI-D(I)
	Analog	RGB(I)
	Audio	External Speaker(I)
	External Control	RS232C(I)
PHYSICAL SPECIFICATION	Bezel Width	3.4mm (Top / Left) / 19mm (Bottom / Right)
	Monitor Dimension (W x H x D)	1215cm x 68.6cm x 9.9cm
	Weight (head)	33.4kg
	Carton Dimensions (W x H x D)	140.0cm x 80.5cm x 33.0cm (Box outer size)
	Packed Weight	42.4kg
	VESA™ Standard Mount Interface	600mm x 400mm
	SPECIAL FEATURES	Additional
	ENVIRONMENT CONDITIONS	Operation Temperature Operation Humidity
	POWER	Power Supply Power Consumption Typical / Smart Energy Saving DPMS Power Off
	STANDARD(CERTIFICATION)	Safety EMC ErP / Energy Star
MEDIA PLAYER COMPATIBILITY	Slot PC compatible (optional)	No
	External Media player Attachable	Yes
	SOFTWARE COMPATIBILITY	Supersign Compatibility
	ACCESSORY	Included
		Remote Controller, Power Cable, RGB Cable, DVI Cable, Manual, IR Receiver, RS-232C Cable, Tiling Guide, Screw, Ring Core, 3D Glass


* WOT : Within Operation Temperature

※ Image may differ slightly from actual product. Specifications are subject to change without prior notice.

INTERFACE



DIMENSION (unit : mm)

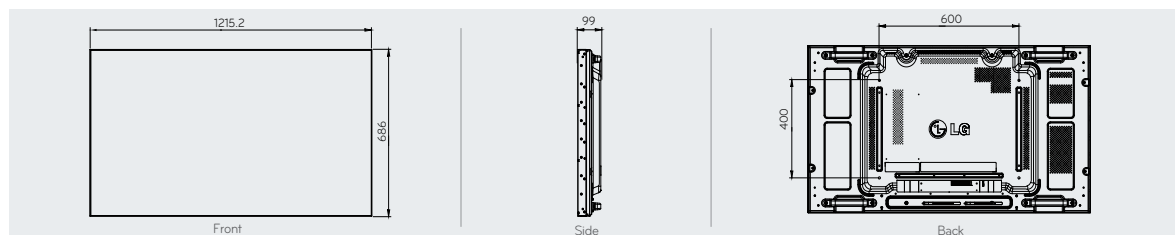

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660