

ADAM-4011 ADAM-4012 ADAM-4013

1-ch Thermocouple Input Module

1-ch Analog Input Module


1-ch RTD Input Module



ADAM-4011



ADAM-4012

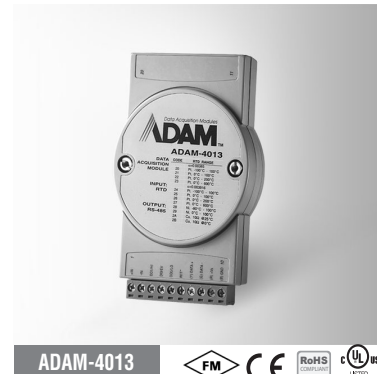

ADAM-4013



Specifications

General

- Power Consumption 1.4 W @ 24 V_{DC}
- Supported Protocols ASCII command

Analog Input

- Channels 1
- Input Impedance Voltage: 2 M Ω
Current: 125 Ω (Added by user)
- Input Type T/C, mV, V or mA
- Input Range ± 15 mV, ± 50 mV, ± 100 mV,
 ± 500 mV, ± 1 V,
 ± 2.5 V, ± 20 mA
- Accuracy Voltage mode: $\pm 0.1\%$ or better
Current mode: $\pm 0.2\%$ or better

T/C Type and Temperature Range

J	0 ~ 760°C	R	500 ~ 1,750°C
K	0 ~ 1,370°C	S	500 ~ 1,750°C
T	-100 ~ 400°C	B	500 ~ 1,800°C
E	0 ~ 1,000°C		

- Span Drift ± 25 ppm/°C
- Zero Drift ± 6 μ V/°C

Digital Input

- Channels 1
Logic level 0: 1 V max.
Logic level 1: 3.5 ~ 30 V
Pull up current: 0.5 mA,
10 k Ω resistor to 5 V
Max. input freq: 50 Hz
- Event Counter

Digital Output

- Channels 2, open collector to 30 V,
30 mA max. load
- Power Dissipation 300 mW
- Supports high/low alarms

Common Specifications

General

- Power Input Unregulated 10 ~ 30 V_{DC}
- Connectors 1 x plug-in terminal block
(#14 ~ 22 AWG)
- Watchdog Timer System (1.6 second)

Analog Input

- Resolution 16-bit
- Sampling Rate 10 sample/second

- CMR @ 50/60 Hz 150 dB
- NMR @ 50/60 Hz 100 dB
- Isolation Voltage 3,000 V_{DC}

Environment

- Operating Humidity 5 ~ 95% RH
- Operating Temperature -10 ~ 70°C (14 ~ 158°F)
- Storage Temperature -25 ~ 85°C (-13 ~ 185°F)

Specifications

General

- Power Consumption 1.2 W @ 24 V_{DC}
- Supported Protocols ASCII command

Analog Input

- Channels 1
- Input Impedance Voltage: 20 M Ω
Current: 125 Ω (Added by user)
- Input Type mV, V or mA
- Input Range ± 150 mV, ± 500 mV, ± 1 V,
 ± 5 V, ± 10 V and ± 20 mA
- Accuracy Voltage mode: $\pm 0.1\%$ or better
Current mode: $\pm 0.2\%$ or better
- Span Drift ± 25 ppm/°C
- Zero Drift ± 6 μ V/°C

Digital Input

- Channels 1
Logic level 0: 1 V max.
Logic level 1: 3.5 ~ 30 V
pull up current: 0.5 mA,
10 k Ω resistor to 5 V
- Event Counter Max. input freq.: 50 Hz
Min. input pulse width: 1 msec.

Digital Output

- Channels 2, open collector to 30 V,
30 mA max. load
- Power Dissipation 300 mW

Specifications

General

- Power Consumption 0.7 W @ 24 V_{DC}
- Supported Protocols ASCII command

Analog Input

- Channels 1
- Input Connections 2 or 3-wire
- Input Impedance 2 M Ω
- Input Type Pt or Ni RTD
- RTD Types and Temperature Ranges
IEC RTD 100 ohms
Pt -100°C to +100°C a = 0.00385
Pt 0°C to +100°C a = 0.00385
Pt 0°C to +200°C a = 0.00385
Pt 0°C to +600°C a = 0.00385
JIS RTD 100 ohms
Pt -100°C to +100°C a = 0.003916
Pt 0°C to +100°C a = 0.003916
Pt 0°C to +200°C a = 0.003916
Pt 0°C to +600°C a = 0.003916
Ni RTD
Ni -80°C to +100°C
Ni 0°C to +100°C
- Accuracy $\pm 0.1\%$ or better
- Span Drift ± 25 ppm/°C
- Zero Drift ± 3 μ V/°C

Ordering Information

- ADAM-4011 1-ch Thermocouple Input Module
- ADAM-4012 1-ch Analog Input Module
- ADAM-4013 1-ch RTD Input Module

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660