

Optolinx FCU-100

10/100BaseTX to 100BaseFX Media Converter




Features

- ▶ Complies with IEEE 802.3 100BaseT & 802.3u 100BaseTX/FX Standards
- ▶ Store-and-Forward Switching Mechanism
- ▶ Auto-Crossover for MDI/MDIX in TP Port
- ▶ 10/100Mbps Auto Negotiation
- ▶ Supports Link-Fault-Pass-Through
- ▶ LED: Power, FDX, TP 100, TP Link/Act, Fiber 100, Fiber Link/Act
- ▶ Supports 1K MAC Address
- ▶ Supports 48K Byte Packet Buffer
- ▶ Configuration DIP Switch Supports Auto, Speed, Duplex, Auto MDI/MDIX, & Link-Fault-Pass-Through
- ▶ 5-Year Warranty



Specifications

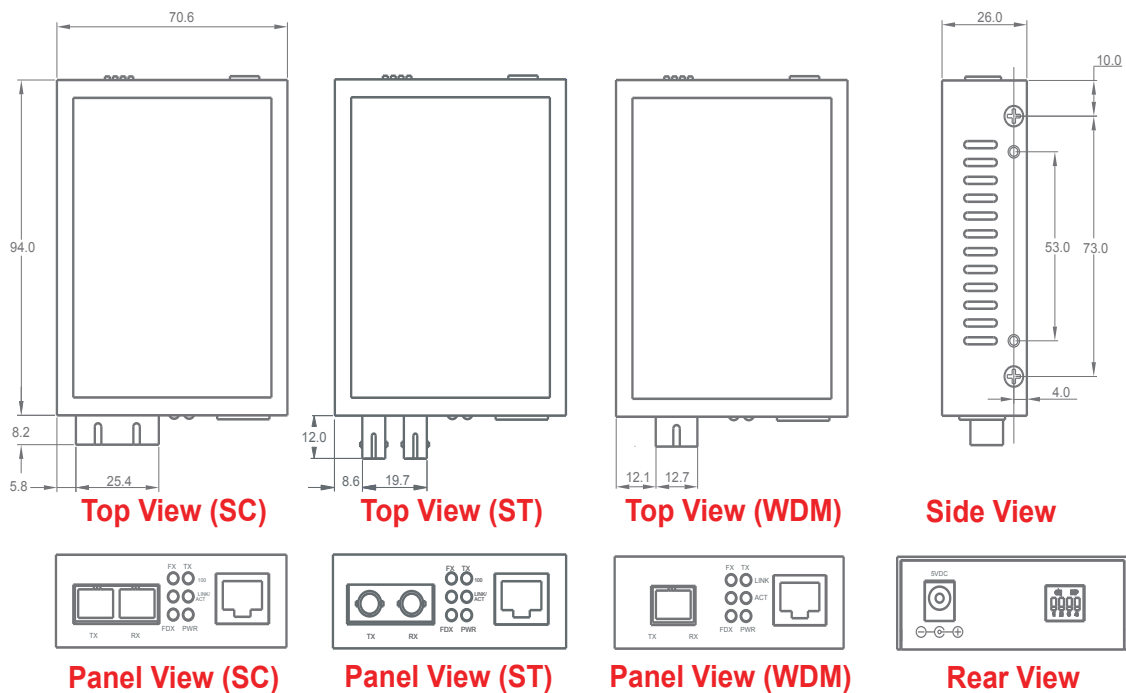

Antaira Technologies - Toll-Free: (877) 229-3665 - Phone: (714) 671-9000 - FAX: (714) 671-9944 - e-Mail: info@antaira.com - Website: <http://www.antaira.com>

► Specifications

Standard

IEEE 802.3 100BaseT
IEEE 802.3u 100BaseTX & 100BaseFX

Interface

10/100BaseT: 1 x RJ45 Port
100BaseFX: 1 x SC Port

Connector Type

FCU-100SC/SC-Sx/WA/WB-Sx: SC Connector
FCU-100ST: ST Connector

Wavelength

FCU-100SC/ST/SC-Sx: 1310nm
FCU-100WA-Sx: TX-1310nm; RX-1550nm
FCU-100WB-Sx: TX-1550nm; RX-1310nm

Typical Distance

FCU-100SC/ST: 2 Km
FCU-100SC-S3: 30 Km
FCU-100SC-S5: 50 Km
FCU-100SC-S8: 80 Km
FCU-100WA/WB-S2: 20 Km
FCU-100WA/WB-S8: 80 Km

Minimum TX Power

FCU-100SC/ST: -19.0 dBm
FCU-100SC-Sx: -15.0 ~ 0 dBm
FCU-100WA/WB-S2: -14.0 dBm
FCU-100WA/WB-S8: -2.0/-3.0 dBm

Maximum TX Power

FCU-100SC/ST: -14.0 dBm
FCU-100SC-Sx: -8.0 ~ 5.0 dBm
FCU-100WA/WB-S2: -8.0 dBm
FCU-100WA/WB-S8: 3.0 dBm

Sensitivity

FCU-100SC/ST: -30.0 dBm
FCU-100SC-Sx: -36.0 ~ -34.0 dBm
FCU-100WA/WB-S2: -33.0 dBm
FCU-100WA/WB-S8: -35.0 dBm

Link Budget

FCU-100SC/ST: 11.0 dB
FCU-100SC-Sx: 19.0 ~ 36.0 dB
FCU-100WA/WB-S2: 19.0 dB
FCU-100WA/WB-S8: 33.0/32.0 dB

Switching Method

Store and Forward

Data Transfer Rate

200 Mbps - Full Duplex

MAC Table

1K

Memory Buffer

48K

Forward/Filter Rate

Filtering Rate (Ethernet) - 14,880 pps
Filtering Rate (Fast Ethernet) - 148,800 pps

LED

Power, FDX, TP100, TP Link/ACT, FX100, FX Link/ACT

Power

External Power Supply: DC 5V, 1.6A

Power Consumption

5 Watts

Operation Temperature

0° C to 50° C (32° F to 122° F)

Storage Temperature

-20° C to 60° C (-4° F to 140° F)

Operation Humidity

5% to 90% (Non-condensing)

Mechanical

Casing: IP30 Metal Case
Dimension (W x H x D): 71 x 94 x 26 mm (2.80 x 3.70 x 1.02 inches)
Weight: 0.6 Kg (1.3 lbs)
Installation: DIN-Rail/Wall Mountable

Emission/Safety

FCC Class A, CE

Warranty

5-Year Warranty

► Ordering Information

FCU-100SC

FCU-100ST

FCU-100SC-S3

FCU-100SC-S5

FCU-100SC-S8

FCU-100WA-S2

FCU-100WB-S2

FCU-100WA-S8

FCU-100WB-S8

10/100TX - 100FX Media Converter, Standalone Module, Multi-Mode, SC, 2Km

10/100TX - 100FX Media Converter, Standalone Module, Multi-Mode, ST, 2Km

10/100TX - 100FX Media Converter, Standalone Module, Single-Mode, SC, 30Km

10/100TX - 100FX Media Converter, Standalone Module, Single-Mode, SC, 50Km

10/100TX - 100FX Media Converter, Standalone Module, Single-Mode, SC, 80Km

10/100TX - 100FX Single-Strand Fiber (WDM), Standalone Module, Single-Mode, SC, 20Km, TX-1310nm; RX-1550nm

10/100TX - 100FX Single-Strand Fiber (WDM), Standalone Module, Single-Mode, SC, 20Km, TX-1550nm; RX-1310nm

10/100TX - 100FX Single-Strand Fiber (WDM), Standalone Module, Single-Mode, SC, 80Km, TX-1310nm; RX-1550nm

10/100TX - 100FX Single-Strand Fiber (WDM), Standalone Module, Single-Mode, SC, 80Km, TX-1550nm; RX-1310nm

Optional Accessories

AD-SCM-STF-M

AD-SCM-STF-S

FCU-BK

DIN-RAIL-KIT

SC (Male) to ST (Female) Duplex Adapter (Multi-Mode)

SC (Male) to ST (Female) Duplex Adapter (Single-Mode)

Mounting Brackets for FCU Modules

DIN-Rail Mounting Kit

Antaira Technologies

Toll-Free: (877) 229-3665

Phone: (714) 671-9000

FAX: (714) 671-9944

e-Mail: info@antaira.com

Website: <http://www.antaira.com>


antaira
www.antaira.com

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660