

Devolinx STE-604C

Industrial 4-Port RS-232/422/485 to 2-Port 10/100TX Device Server




Features

- ▶ Redundant Dual Ethernet Ports: Recovery Time < 10ms
- ▶ Switch Mode Support: Daisy Chain to Reduce Usage of Switch ports
- ▶ Dual IP Support: One for LAN and One for WAN
- ▶ NAT-Pass Through: User Can Manage Through NAT Router
- ▶ Redundant Power Inputs: 12 ~ 48VDC on Terminal Block
- ▶ Redundant multiple host devices:
5 simultaneous in Virtual COM, TCP Server, TCP Client mode, UDP
- ▶ Secured Management by HTTPS and SSH
- ▶ Event Warning by Syslog, Email, SNMP trap, and Beeper
- ▶ 5-Year Warranty



▶ Dimensions (unit = mm)

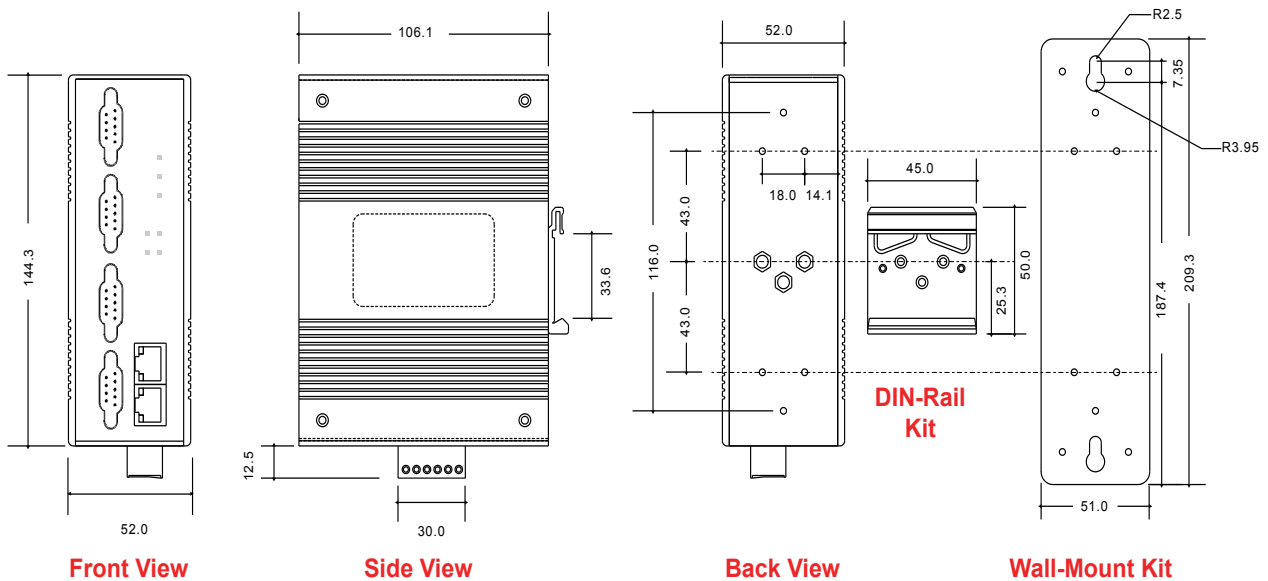

► Specifications

Ethernet Port
2 x 10/100BaseT(X) Ports in RJ-45 Auto MDI/MDI-X

Power over Ethernet (P.O.E.) - STE-604C-P Only
Present at ETH2
Power Device (IEEE 802.3af):

- IEEE 802.3af Compliant Input Interface
- Power Consumption: 8 Watts Max.
- Overload & Short Circuit Protection
- Isolation Voltage: 1000 VDC Min.
- Isolation Resistance: 10⁸ ohms Min.

Serial Connectors
4 x DB9

Operation Mode
RS-232 / RS-422 / 4(2)-Wire RS-485

Serial Baud Rate
110 bps to 460.8 Kbps

Data Bits
5, 6, 7, 8

Parity
odd, even, none, mark, space

Stop Bits
1, 1.5, 2

RS-232
TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND

RS-422
Tx+,Tx-, Rx+, Rx-,GND

RS-485 (4-Wire)
Tx+,Tx-, Rx+, Rx-,GND

RS-485 (2-Wire)
Data+, Data-,GND

Flow Control
XON/XOFF, RTS/CTS, DTR/DSR

LED
PWR 1(2)/Ready, Link/ACT, Serial TX/RX

Power (Redundant Input)
Dual DC Inputs
12 ~ 48VDC in 6-Pin Terminal Block

Power Consumption (Typ.)
5.5 Watts

Overload Current Protection
Present

Reverse Polarity Protection
Present

Operation Temperature
-30° C to 70° C (-22° F to 158° F)

Operation Humidity
5% to 95% (Non-condensing)

Storage Temperature
-40° C to 85° C (-40° F to 185° F)

Casing/Enclosure
IP30 Protection

Dimension (W x H x D)
52 x 144 x 106 mm (2.05 x 5.67 x 4.17 in.)

Weight (g)
STE-604C: 678 g
STE-604CP: 682 g

EMI
FCC Part 15, CISPR (EN55022) Class A

EMS
CE EN61000-4-2/EN61000-4-3/EN61000-4-4/EN61000-4-5/EN61000-4-6
/EN61000-4-8/EN61000-4-11

Stability Testing
Shock: IEC60068-2-27
Free Fall: IEC60068-2-32
Vibration: IEC60068-2-6

Safety
EN60950

Warranty
5-Year Warranty

► Ordering Information

STE-604C Industrial 4-Port RS-232/422/485 to 2-Port 10/100TX Device Server
STE-604C-P Industrial 4-Port RS-232/422/485 to 2-Port 10/100TX Device Server w/ 1-Port PoE

Optional Accessories

DR-4524 45W 24VDC Industrial DIN Rail Power Supply
DR-75-24 75W 24VDC Industrial DIN Rail Power Supply
DR-120-24 120W 24VDC Industrial DIN Rail Power Supply

Aaxeon Technologies

445 Capricorn St.
Brea, CA 92821
USA

Toll-Free: (877) AAXEON5 (229-3665)
Phone: (714) 671-9000
FAX: (714) 671-9944
e-Mail: info@aaxeon.com

aaxeon
www.aaxeon.com

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660