

# MERA-2000 Series

**Arestech**

Rugged Box PC with Intel® Atom or Celeron® Processor



## Features

- Intel® Celeron® Processor J1900, up to 2.42GHz
- Dual Displays Supported by DVI-I and DisplayPort
- 1x DDR3L 1066/ 1333MHz SO-DIMM. Max up to 8GB
- 2x Intel i210-AT GbE Ports, Support Wake-on-LAN and PXE
- 2x Full-size Mini-PCIe, 2x SIM Sockets
- 9~48V DC Input with Built-in Ignition Power Control
- -40°C ~ 70°C Wide Temperature Operation

## Applications

- Digital Signage Control Systems
- Factory Automation Applications
- Image Processing (e.g. Medical 2D and 3D imaging)
- Gaming and Entertainment Industries
- Network Communications

## → Packing List

Description
1 x MERA-2000 Series Machine
1 x DVI to VGA Adapter
1 x Wall Mount Kit

## → Optional Items

Part No.	Description
AWD-4G003	4G(LTE) EG25-G+ 2 antenna, Full size (for global)
AWD-WF001	Wi-Fi 802.11 bgn (1T1R) +1 Antenna (Single band), Half-size mini PCIe
AWD-WF003	Wi-Fi 802.11 a/b/g/n/ac/BT4.0 (2T2R)+ 2 antenna(dual band), mini PCIe Half size
2107-2330-X10	DIN-RAIL Mount Kit
55000-0025-M5	Adapter 12V/ 5A 60W
30100-0003-CA	Power Cord, 3-pin US Type, 180cm
30101-0005-CA	Power Cord, European Type, 180 cm

## → Ordering Information


Part No.	Description
MERA-2000	Intel® J1900 Compact fanless box pc with 2x LAN, 1x USB 3.0, 4x USB2.0, 2x RS232/422/485, 1x DVI-I, 1x DP, Lin out, Mic in, 1x Removable 2.5" SATA HDD Bay
MERA-2010	Intel® J1900 Rugged Box PC with 2x LAN, 1x USB 3.0, 4x USB2.0, 2x RS232/422/485, 1x DVI-I, 1x DP, Lin out, Mic in, 1x Universal I/O Bracket, 1x Removable 2.5" SATA HDD Bay
MERA-2011	Intel® J1900 Rugged Box PC with 2x LAN, 1x USB 3.0, 4x USB2.0, 2x RS232/422/485, 1x DVI-I, 1x DP, Lin out, Mic in, 1x Universal I/O Bracket, 2x Removable 2.5" SATA HDD Bays

[www.arestech.com.tw](http://www.arestech.com.tw)

# MERA-2000 Series

**Arestech**

## → Dimensions

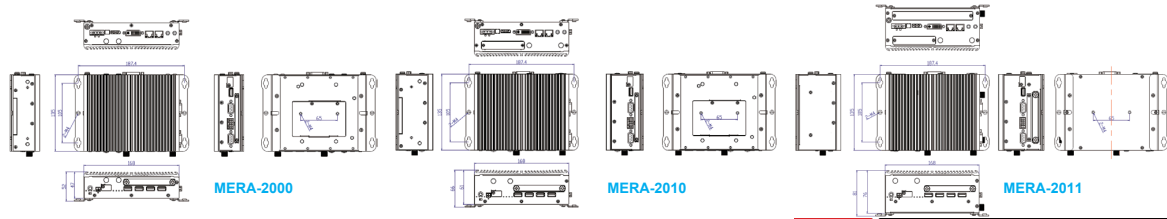

## → Specifications

Model		MERA-2000	MERA-2010	MERA-2011	
Processor System	CPU	Intel® Celeron® Processor J1900			
	System Chipset	N/A			
	BIOS	AMI BIOS, 64Mbit SPI Flash ROM Built on Board			
Memory	Technology	Single Channel DDR3L 1066/1333 MHz SO-DIMM			
	Max. Capacity	8 GB (un-buffered and non-ECC)			
	Socket	1 x DDR3L 204-pin SO-DIMM			
Display	Graphics Engine	Integrated Intel® HD Graphics			
	VGA	N/A			
	DVI-D	1 x DVI-I (DVI-D+VGA), Resolution 1920*1200			
	HDMI	N/A			
	Display Port	1 x DP (3840*2160)			
I/O Interface	Multi Display	Yes			
	USB	5 (1 x USB3.0, 4 x USB2.0)			
	Serial	2 x COM (RS-232/422/485), with Auto Flow Control, DB9			
	GPIO	4 x Isolated DI and 4 x Isolated DO Port, 10-Pin Terminal Block			
	Ethernet	2 x GbE (2 x Intel® i210-AT GbE LAN Ports, Supporting Wake-on-LAN and PXE)			
	Audio	Lin out, Mic in			
	CMOS Battery	1 x External Clear CMOS Switch			
Expansion	Universal I/O Bracket	N/A	1 x Universal I/O Bracket	1 x Universal I/O Bracket	
	miniPCIe/ M.2 Slot	1 x Full-size Mini-PCIe Socket (mux with mSATA), 1 x Full-size Mini-PCIe			
	SIM Socket	2 x External SIM Socket			
	Antenna Hole	6 x Antenna Holes	4 x Antenna Holes	4 x Antenna Holes	
Storage	PCI/ PCIe Slot	N/A			
	HDD/SSD	1 x Removable 2.5" SATA HDD Bay	1 x Removable 2.5" SATA HDD Bay	2 x Removable 2.5" SATA HDD bay	
	RAID	N/A			
	CFast Socket	1 x CFast Socket (Shared by mSATA)			
Power	mSATA/M.2	1 x mSATA Socket (Shared by 1 x Mini-PCIe and CFast)			
	Power On Model	AT/ATX			
	Power Supply Voltage	Power Supply: 9~48V DC (Power Ignition Sensing)			
	Power Connector Type	1 x 3-pin Terminal Block Connector			
	Power Consumption (Max.)	Max: 1.66A @ 12 V (20W)			
	Battery	CR2032; 3.3V			
	Power Connector Type	1 x AT/ATX Mode Switch			
Mounting	Protection	Over Voltage Protection (OVP) Up to 52V Reverse Voltage Protection (RVP) up to -48V Over Current Protection (OCP) 20A			
	Car Mode	1 x PC/Car Mode Switch			
	Type	Wall Mounting/DIN-Rail Mounting (Optional)			
	Environment	Operating Temperature	-40°C to 70°C (with Industrial Grade Peripherals)		
		Storage Temperature	-40°C to 80°C		
Humidity		10%~95% (Non-condensing)			
Vibration		5 Grms, 5-500 Hz, 3 Axis			
General	Shock	50 Grms, Half-sine 11 ms			
	Certification	CE/FCC			
	Thermal Dissipation	Fanless System			
	Material	Extruded Aluminum with Heavy Duty Metal			
	Dimensions (W x H x D)	168 x 135 x 47 mm (6.61" x 5.31" x 1.85")	168 x 135 x 61 mm (6.61" x 5.31" x 2.40")	168 x 135 x 76mm (6.61" x 5.31" x 2.99")	
	Net Weight	1.1 kg (2.43lb)	1.15 kg (2.54lb)	1.45 kg (3.20lb)	
Operating System	Windows 10 (IoT / Professional), Linux				

Tel: +886-2-8287-9168 Fax: +886-2-8287-2577

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660