




**8th Gen Intel® Core™ Processor
COM Express® Compact**




WL968

ULT

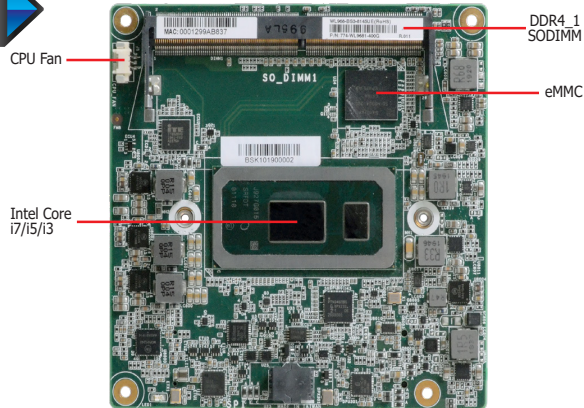


Front View



Bottom View

Mechanical Drawing

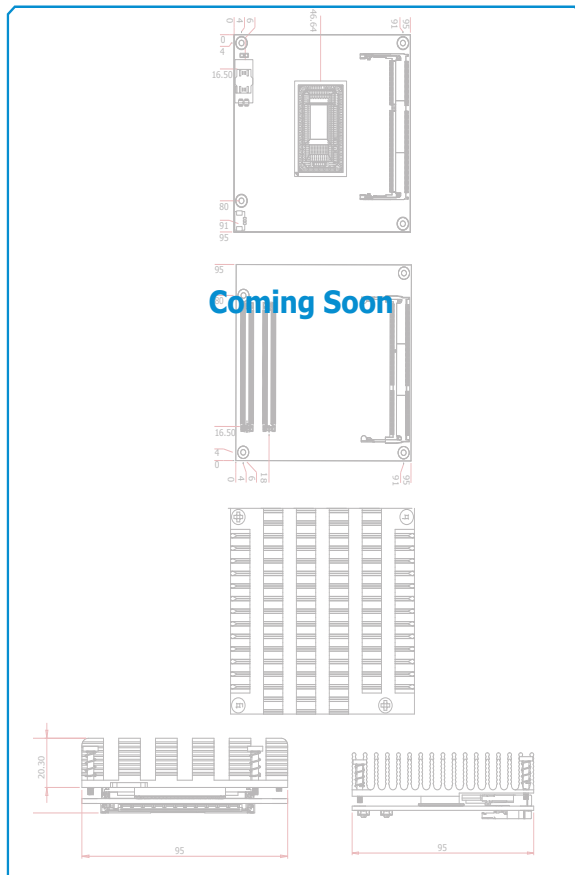


Features

- Dual Channel DDR4 2400MHz SODIMM up to 64GB
- Three independent displays: VGA*/DDI + LVDS*/eDP + DDI
- DP++ supports 4K x 2K resolution
- Multiple expansion: 8 PCIe x1, 1 LPC, 1 I²C, 1 SMBus
- Rich I/O: 1 Intel GbE, 4 USB 3.0, 8 USB 2.0

* Populated by default



Block Diagram

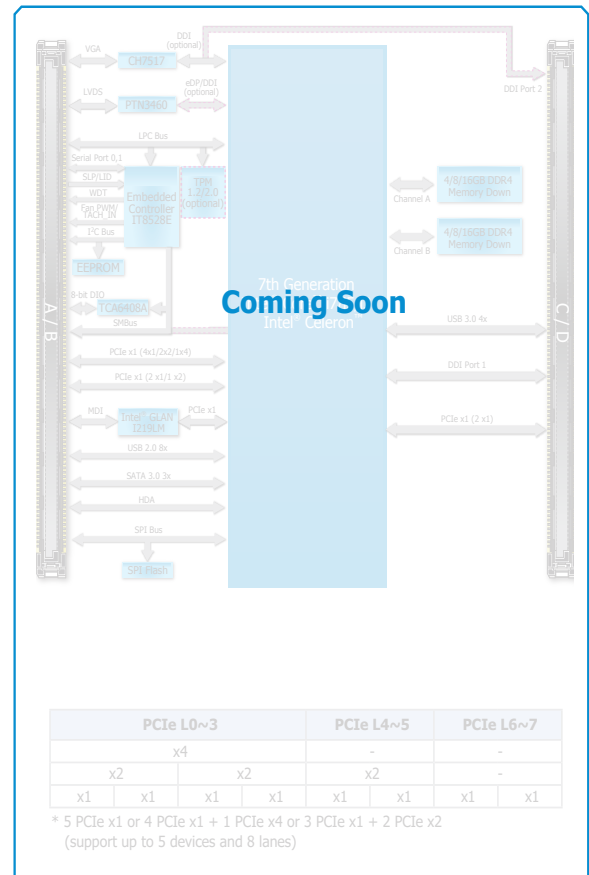



Specifications

SYSTEM	Processor	8th Gen Intel® Core™ Processor, FCBGA1528 Intel® Core™ i7-8665UE Processor, Quad Core, 8M Cache, 1.7GHz (4.4GHz), 15W Intel® Core™ i5-8365UE Processor, Quad Core, 6M Cache, 1.6GHz (4.1GHz), 15W Intel® Core™ i3-8145UE Processor, Dual Core, 4M Cache, 2.1GHz (3.9GHz), 15W Intel® Celeron® Processor 4305UE, Dual Core, 2M Cache, 2.0GHz (2.0GHz), 15W	
	Memory	Two 204-pin SODIMM up to 64GB	Dual Channel DDR4 2400MHz
	BIOS	AMI SPI 128Mbit	
GRAPHICS	Controller	Intel® HD Graphics	
	Feature	OpenGL 5.0, DirectX 12, OpenCL 2.1 HW Decode: AVC/H.264, MPEG2, VC1/WMV9, JPEG/MJPEG, HEVC/H265, VP8, VP9 HW Encode: AVC/H.264, MPEG2, JPEG, HEVC/H265, VP8, VP9	
	Display	1 x VGA/DDI (DDI available upon request) 1 x LVDS/eDP (eDP available upon request) 1 x DDI	VGA: resolution up to 1920x1200 @ 60Hz LVDS: dual channel 24-bit, resolution up to 1920x1200 @ 60Hz eDP: resolution up to 4096x2304 @ 60Hz HDMI: resolution up to 4096x2160 @ 30Hz DP++: resolution up to 4096x2304 @ 60Hz
	Triple Displays	VGA + LVDS + DDI	DDI + eDP + DDI
EXPANSION	Interface	5 PCIe x1 or 4 PCIe x1 + 1 PCIe x4 or 3 PCIe x1 + 2 PCIe x2 (support up to 5 devices and 8 lanes) 1 x LPC 1 x I ² C 1 x SMBus 2 x UART (TX/RX)	
	eMMC	1 x 8GB/16GB/32GB/64GB/128GB eMMC 5.1 (available upon request)	
AUDIO	Interface	HD Audio	
ETHERNET	Controller	1 x Intel® I219LM with iAMT11.0 PCIe (10/100/1000Mbps)	
I/O	USB	4 x USB 3.0 8 x USB 2.0	
	SATA	3 x SATA 3.0 (up to 6Gb/s)	RAID 0/1/5
	DIO	1 x 8-bit DIO	
WATCHDOG TIMER	Output & Interval	System Reset, Programmable via Software from 1 to 255 Seconds	
SECURITY	TPM	Available Upon Request	
POWER	Type	12V, 5VSB, VCC_RTC (ATX mode)	12V, VCC_RTC (AT mode)
	Consumption	TBD	
OS SUPPORT		Windows: Windows 10 IoT Enterprise 64-bit	Ubuntu 18.04
ENVIRONMENT	Temperature	Operating: 0 to 60°C -40 to 85°C (with heat spreader)	Storage: -40 to 85°C
	Humidity	Operating: 5 to 90% RH	Storage: 5 to 90% RH
	MTBF	TBD	
MECHANICAL	Dimensions	COM Express® Compact	95mm (3.74") x 95mm (3.74")
	Compliance	PICMG COM Express® R3.0, Type 6	
STANDARDS AND CERTIFICATIONS	Certification	CE, FCC, RoHS	

Packing List

• 1 WL968 board	
• 1 CPU Cooler (for -40 to 85°C, H=35.2mm)	A71-108124-000G
• 1 Heat sink (for 0 to 60°C, H=26.8mm)	A71-008137-000G

Optional Items

• COM332-B carrier board kit	770-CM3321-000G
• Heatspreader (H=11mm)	A71-808324-000G

www.dfi.com

DFI reserves the right to change the specifications at any time prior to the product's release. Changes thereafter will be based on the product's revision. Please contact your sales representative for the exact revision offered in your area. All product names mentioned are trademarks of their respective companies. © May 19, 2020 DFI Inc.

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660