



CS181-H310 Desktop

9th/8th Gen Intel® Core™
Mini-ITX

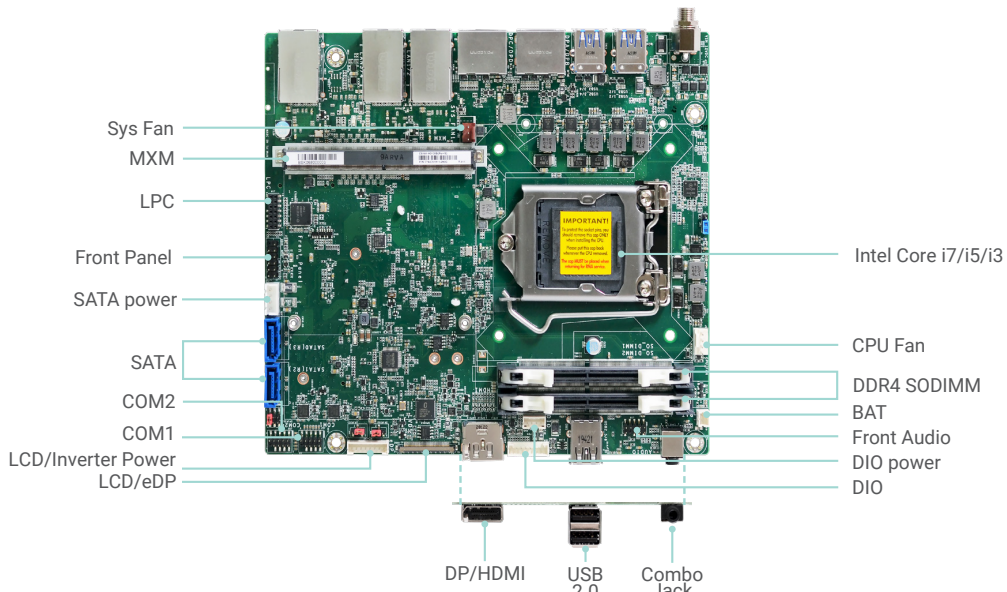

KEY FEATURES

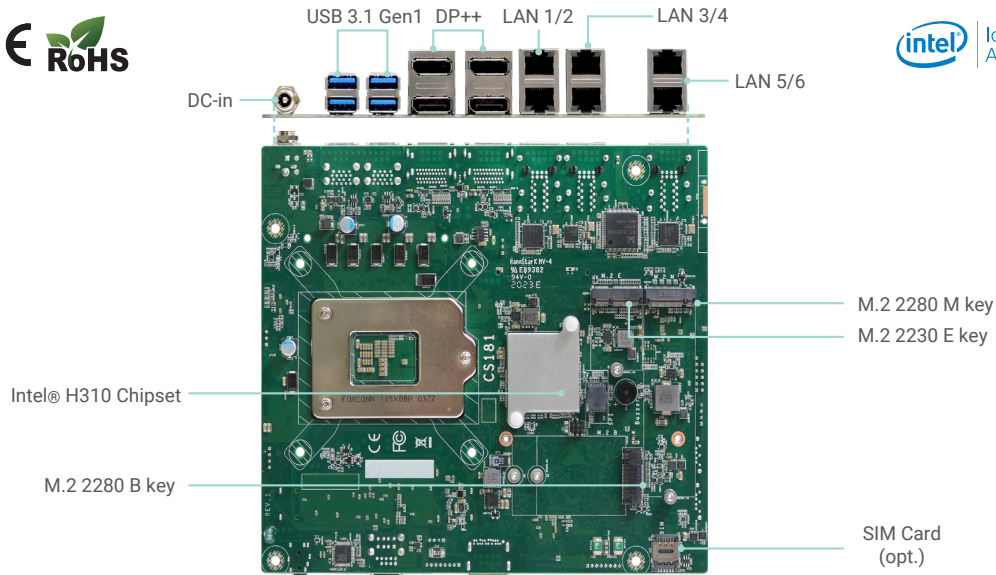

DDR4

2 DDR4 SODIMM up to 32GB



4K High Resolution

Supports 4K/ 2K resolution



Multiple Displays

1 LVDS/eDP,
1 DP++/HDMI (auto-detection)
4 DP



Multiple Expansion


1 MXM Type-A/B,
1 M.2 M Key,
1 M.2 B Key,
1 M.2 E Key




Rich I/O

6 Intel GbE, 2 COM,
4 USB 3.1 Gen2,
6 USB 2.0

BLOCK DIAGRAM

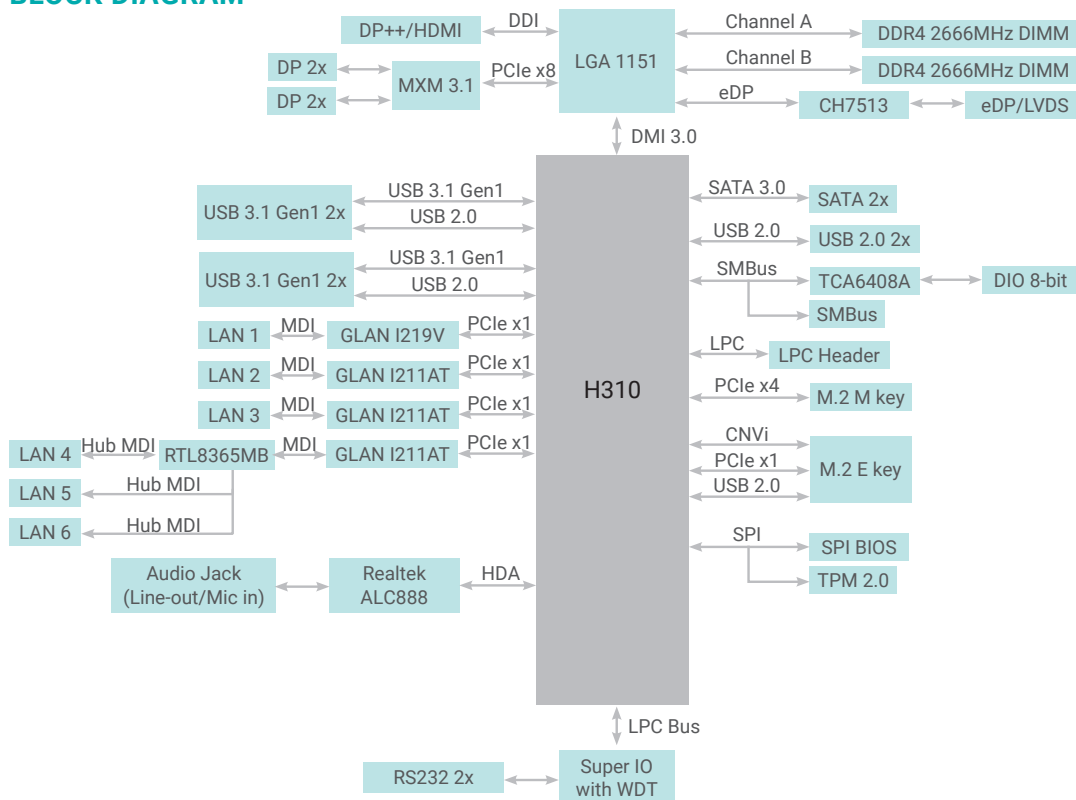

MECHANICAL DRAWING

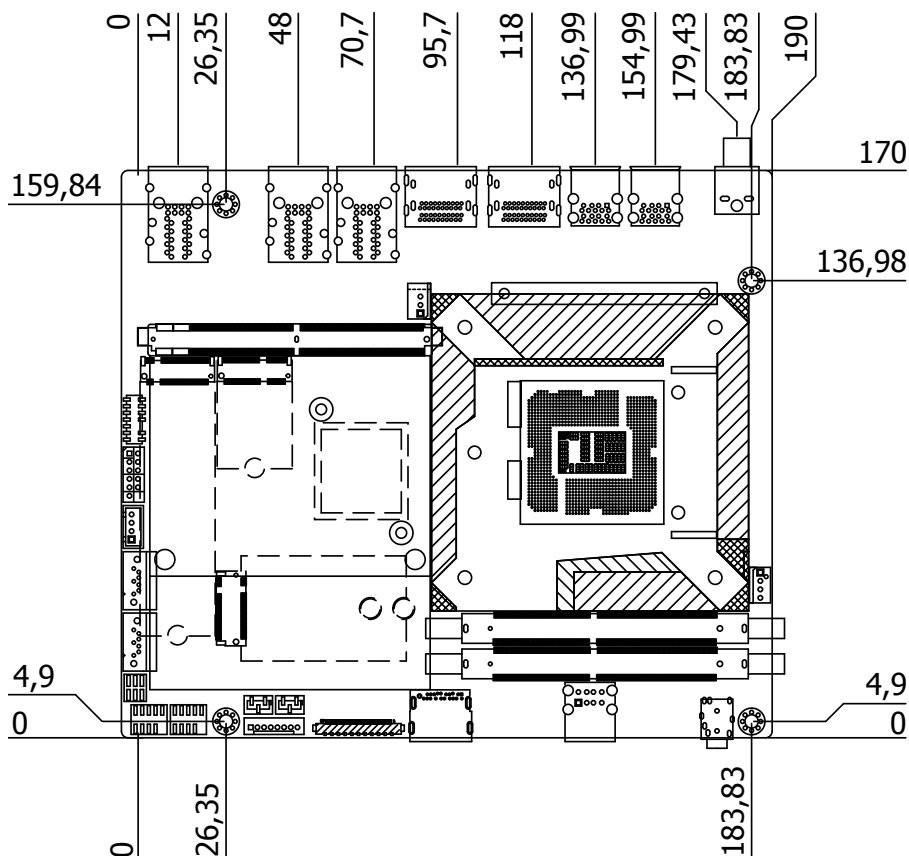

SPECIFICATION

System	Processor	9th Generation Intel® Core™ Processors, LGA 1151 Socket, TDP up to 65W Intel® Core i7-9700E Processor (Core 8; Max speed 4.4 GHz; TDP 65W) Intel® Core i7-9700TE Processor (Core 8; Max speed 3.8 GHz; TDP 35W) Intel® Core i5-9500E Processor (Core 6; Max speed 4.2 GHz; TDP 65W) Intel® Core i5-9500TE Processor (Core 6; Max speed 3.6 GHz; TDP 35W) Intel® Core i3-9100E Processor (Core 4; Max speed 3.7 GHz; TDP 65W) Intel® Core i3-9100TE Processor (Core 4; Max speed 3.2 GHz; TDP 35W) 8th Generation Intel® Core™ Processors, LGA 1151 Socket, TDP up to 65W Intel® Core™ i7-8700 Processor (Core 6; Max speed 4.6 GHz; TDP 65W) Intel® Core™ i7-8700T Processor (Core 6; Max speed 4.0 GHz; TDP 35W) Intel® Core™ i5-8500 Processor (Core 6; Max speed 4.1 GHz; TDP 65W) Intel® Core™ i5-8500T Processor (Core 6; Max speed 3.5 GHz; TDP 35W) Intel® Core™ i3-8100 Processor (Core 4; Max speed 3.6 GHz; TDP 65W) Intel® Core™ i3-8100T Processor (Core 4; Max speed 3.1 GHz; TDP 35W) Intel® Pentium G5400 Processor (Core 2; Max speed 3.7 GHz; TDP 58W) Intel® Celeron G4900 Processor (Core 2; Max speed 3.1 GHz; TDP 54W)
	Chipset	Intel® H310 Chipset
	Memory	Two 260-pin SODIMM up to 32GB Dual Channel DDR4 2400/2666MHz
	BIOS	AMI SPI 128Mbit
	Graphics	Intel® UHD Graphics 630 (Pentium G5400 and Celeron G4900 support Intel® UHD Graphics 610)
Graphics	Controller	Intel® UHD Graphics 630 (Pentium G5400 and Celeron G4900 support Intel® UHD Graphics 610)
	Feature	OpenGL 4.5, DirectX 12, OpenCL 2.1 HW Decode: AVC/H.264, MPEG2, VC1/WMV9, JPEG/MJPEG, HEVC/H265, VP8, VP9 HW Encode: AVC/H.264, MPEG2, JPEG, HEVC/H265, VP8, VP9
	Display	1 x LVDS/eDP (control by BIOS) 1 x DP++/HDMI (auto-detection) (located at front site) 4 x DP (support by MXM Type-A/B module) (located at rear site) LVDS: resolution up to 1920x1200 @ 60Hz eDP: resolution up to 4096x2304 @ 60Hz DP: resolution up to 4096x2304 @ 60Hz HDMI: resolution up to 4096x2160 @ 30Hz
	Multiple Displays	Onboard: LVDS/eDP + DP++/HDMI Onboard+MXM module: LVDS/eDP + DP++/HDMI + DP + DP + DP + DP
	Interface	1 x MXM Type-A/B (support MXM module) (provide 4 x independent DP at rear site) 1 x M.2 2280 M Key (PCIe Gen2 x1/SATA3.0) (support NVMe) 1 x M.2 3042/3052 B Key (USB3.1 Gen1/PCIe Gen3 x1) (support 5G or storage module) 1 x M.2 2230 E Key (USB2.0/PCIe Gen3 x1) (support BT/Wi-Fi module)
Expansion	Interface	1 x MXM Type-A/B (support MXM module) (provide 4 x independent DP at rear site) 1 x M.2 2280 M Key (PCIe Gen2 x1/SATA3.0) (support NVMe) 1 x M.2 3042/3052 B Key (USB3.1 Gen1/PCIe Gen3 x1) (support 5G or storage module) 1 x M.2 2230 E Key (USB2.0/PCIe Gen3 x1) (support BT/Wi-Fi module)
Audio	Audio Codec	Realtek ALC888S-VD2-GR
Ethernet	Controller	1 x Intel® I219V PHY (10/100/1000Mbps) 5 x Intel® I211AT PCIe (10/100/1000Mbps) (port4~port6 provide by Lan hub)
Rear I/O	Ethernet	6 x GbE (RJ-45) (dual type connector) (port4~port6 provide by Lan hub)
	USB	4 x USB 3.1 Gen1 (dual type-A connector)
	Power	1 x DC Jack
Front I/O	Display	1 x DP++/HDMI (auto-detection)
	USB	2 x USB2.0 (dual type-A connector)
	Audio	1 x Audio Combo Jack
Internal I/O	Serial	2 x RS-232 (support 5V/12V power) (2 x 5 10-pin 2.0mm pitch header)
	Display	1 x LVDS/eDP (control by BIOS) 1 x LCD/Inverter Power
	Audio	1 x Front Audio (2 x 5 10-pin 2.00mm pitch header)
	USB	2 x USB 2.0 (2 x 5 10-pin 2.00mm pitch header)
	SATA	2 x SATA 3.0 (up to 6Gb/s) RAID 0/1/5
	DIO	1 x 8-bit DIO (1 x 8 8-pin 2.00mm pitch header) 1 x DIO Power (1x 4 4-pin 2.00mm pitch header)
	LPC	1 x LPC (2 x 7 14-pin 2.00mm pitch female header)
	SMBus	1 x SMBus
Watchdog Timer	Output & Interval	System Reset, Programmable via Software from 1 to 255 Seconds
Security	TPM	dTPM2.0 (default)
Power	Type	Single 12V +/-5% DC
	Connector	DC-in Jack Right Angle Connector (4-pin) (available upon request) Straight Type Connector (4-pin) (available upon request)
	Consumption	TBD
	RTC Battery	CR2032 Coin Cell
OS Support	Microsoft	Windows 10 IoT Enterprise 64-bit
	Linux	Linux

Environment	Temperature	Operating: -5 to 65°C Storage: -40 to 85°C
	Humidity	Operating: 5 to 90% RH Storage: 5 to 90% RH
	MTBF	TBD
Mechanism	Dimensions	195mm (7.7") x 170mm (6.7")
	Height	PCB: 1.6mm
		Top Side: 26mm, Bottom Side: 10mm

PACKING LIST

1 CS181 motherboard	
1 Serial ATA data with power cable (Length: 300mm)	A81-002013-000G
1 COM port cable (Length: 250mm, 1 COM port)	A81-015011-001G
1 USB port cable (Length: 200mm)	A81-001032-016G
1 Driver DVD (EVT/DVT stage only)	
1 Bring Up (EVT/DVT stage only)	931-000000-000G

OPTIONAL ITEMS

I/O shield	
COM port cable (Length: 250mm, 1 COM port)	A81-015011-001G
Serial ATA data cable (Length: 500mm)	332-553001-005G
Serial ATA power cable (Length: 300mm)	A81-002044-016G
Thermal solution (For 35W, Height: 37.3mm)	A71-103004-000G
Thermal solution (For 65W, Height: 72.8mm)	552-200049-000G
Aetina MXM M3N1050(NVIDIA GeForce GTX 1050, 50W) PN: TBD	
Aetina MXM M3N1060(NVIDIA GeForce GTX 1060, 78W) PN: TBD	

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660