


VDX3-6726

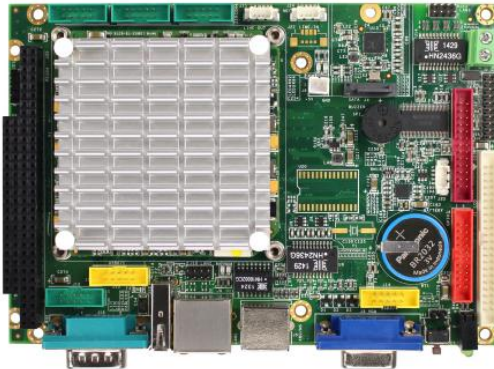

Specifications

CPU	DM&P SoC Vortex86DX3 1GHz, L1: 32K I-Cache, 32K D-Cache, L2 Cache: 512KB			
RAM	1/2GB DDR3 Onboard			
BIOS	AMI BIOS			
Bus	PC/104 Standard Compliant			
Display	Integrated 2D VGA chip with Dual Display Support (VGA + TTL / VGA + LVDS) VGA: Maximum resolution up to 1920 x 1080 @ 60Hz LVDS: Maximum resolution up to 1024 x 768 @6 0Hz, single channel 24-bit LVDS			
LAN	Integrated 10/100Mbps Ethernet x1	Realtek 8111F GbE x2		
Disk Support	SATA DOM			
I/O Interface	RS232 x4 16-bit GPIO x1 HD Audio	USB (ver. 2.0) x4 DOS hot SWAP x1 (Optional)	Parallel x1 PS/2 touch controller x1 (Optional)	
Connectors	2.54mm 4-pin pin header for DC output x1 2.0mm 44-pin box header for LCD x1 2.0mm 20-pin pin header for LVDS x1 2.0mm 8-pin pin header for Ethernet x1 2-pin box header for DC 5V output x1 15-pin D-Sub female connector for VGA x1	2.54mm 2-pin pin header for Reset x1 2.0mm 26-pin box header for Parallel x1 2.0mm 10-pin box header for USB x2 2.0mm 8-pin pin header for GbE x1 7-pin SATA connector for SATA DOM x1 9-pin D-Sub male connector for RS232 x1	2.54mm 104-pin PC/104 connector x1 2.0mm 20-pin box header for 16-bit GPIO x1 2.0mm 10-pin box header for RS232 x4 1.25mm 4-pin wafer connector for Line-out/MIC-in x2 RJ45 connector for GbE x1 PS/2 connector for Keyboard/Mouse x1	
Power Requirement	DC+5V @ 1300mA (Typical)			
Operating Temperature	-20°C - +70°C (Single Core) -10°C - +60°C (Dual Core)	-40°C - +85°C (Optional for Single Core) -20°C - +70°C (Optional for Dual Core)		
Dimension	102 x 146mm			
Weight	150g			
O/S Support	Windows 7 Windows XP Professional POS Ready (WePOS)	Windows Embedded Standard 7 Windows Embedded 2009 QNX	Windows Embedded Compact 7 Linux VxWorks	Windows Embedded CE6.0 DOS Free BSD

Ordering Information

PART NO.	CPU	DRAM (DDR3)	Storage	Display	LAN	GbE	USB (ver. 2.0)	RS232	16-bit GPIO	Parallel	Audio	Bus	Touch
VDX3-6726-1G	1GHz	1GB	SATA	VGA, LVDS, LCD	1	2	5	4	1	1	Line-out/MIC-in	PC/104	Not Supported
VDX3-6726-1G-T	1GHz	1GB	SATA	VGA, LVDS, LCD	1	2	5	4	1	1	Line-out/MIC-in	PC/104	1
VDX3-6726-2G	1GHz	2GB	SATA	VGA, LVDS, LCD	1	2	5	4	1	1	Line-out/MIC-in	PC/104	Not Supported
VDX3-6726-2G-T	1GHz	2GB	SATA	VGA, LVDS, LCD	1	2	5	4	1	1	Line-out/MIC-in	PC/104	1
CABLE-SET-6726	Cable set for VDX3-6726												

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660