

Surveillance/ Video Analytics



EDX-104 Series

5-port IEEE 802.3at PoE+ Gigabit Unmanaged Industrial Ethernet Switch with PoE+ PD and DC Dual Power Input



CE FCC

Key Features

- Five 10/ 100/ 1000 Mbps Ethernet ports
- Supports IEEE 802.3at PoE+ PSE on port 2~5
- Up to 25.5 W power output on each port, total 80W power budget
- Dual power input
 - PoE+ PD (Powered Device) mode via port 1
 - 24/ 48 VDC input with power connector
- EMS level 3 protection for industrial environments
- Industrial-grade, -25°C to 70°C fanless operation
- IP50 (EDX-104J) housing

[Contact Neosys](#)

[Get Quote](#)

Introduction

EDX-104 series is world's first PoE+ unmanaged switch combining IEEE 802.3at PSE/ PD capability and fanless enclosure for IP protection. It offers five Gigabit Ethernet ports compliant with 802.3 (10BASE-T), 802.3u (100BASE-TX) and 802.3ab (1000BASE-T). Four of its ports support 802.3at PoE+ PSE (Power Sourcing Equipment) capability and can deliver up to 25.5W to PoE PD on each port.

The dual power mode feature is what makes EDX-104 unique. It can operate as a PoE+ PD by simply powering it using a Ethernet cable from a PSE. Or, when PSE is not available, you can plug-in 24/ 48V DC and EDX-104 becomes a PSE. The option of operating in PSE or PD mode offers setup and installation flexibility.

EDX-104 series features EMS level 3 protection, Wide temperature -25°C to 70°C fanless operation and IP protection, EDX-104 is the ideal simple and rugged Ethernet switch for your industrial applications.


Specifications

PoE Standard	IEEE 802.3at PSE (port 2~5) IEEE 802.3at PD (port 1)
Ethernet Standard	IEEE 802.3 for 10BASE-T/ IEEE 802.3u for 100BASE-TX IEEE 802.3ab for 1000BASE-T/ IEEE 802.3x for flow control
# of Port	5-port, 1000/100/10 Mbps, auto-negotiation
Switch Features	MAC table size: 8192 entries Frame buffer memory: 1 Mb Jumbo frame support: 10 KB
Ethernet Connector	RJ45, PSE power out: V+/ V-/ V-/ V- on pin 1/ 2/ 3/ 6
Power Input (PD Mode)	Via Ethernet port 1 (RJ45), total power budget for PSE: 25.5 W
Power Input (DC Mode)	24/48 VDC, via 3-pin terminal block, total power budget for PSE: 80 W
IP Rating	IP50
EMC	CE/ FCC Class A, according to EN 50022 & EN 55024 EN 50155/ 50121-3-2
EMS	EN 61000-4-2 (Level 3), EN 61000-4-3 (Level 3), EN 61000-4-4 (Level 3), EN 61000-4-5 (Level 3), EN 61000-4-6 (Level 3), EN 61000-4-8 (Level 3)
Operating Temperature	-25°C to 70°C*
Vibration	Operating, 5 Grms, 5-500 Hz, 3 Axes, according to IEC60068-2-64
Shock	Operating, 50 Grms, Half-sine 11 ms Duration, according to IEC60068-2-27
Dimension	40 mm (W) x 92 mm (D) x139 mm (H)
IP Rating	0.5kg
Mounting	DIN-rail mount


EDX-104 Series



Appearance

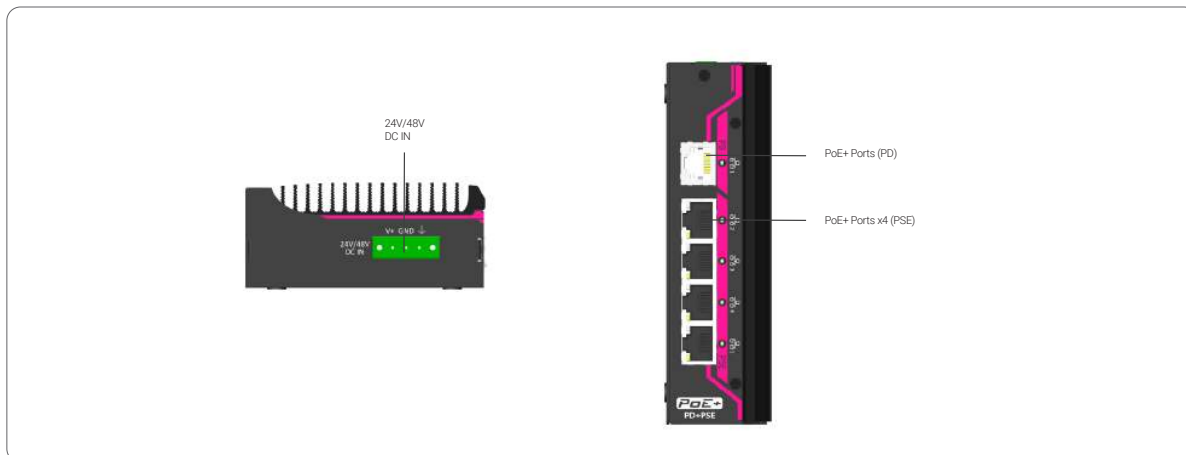

Dimensions

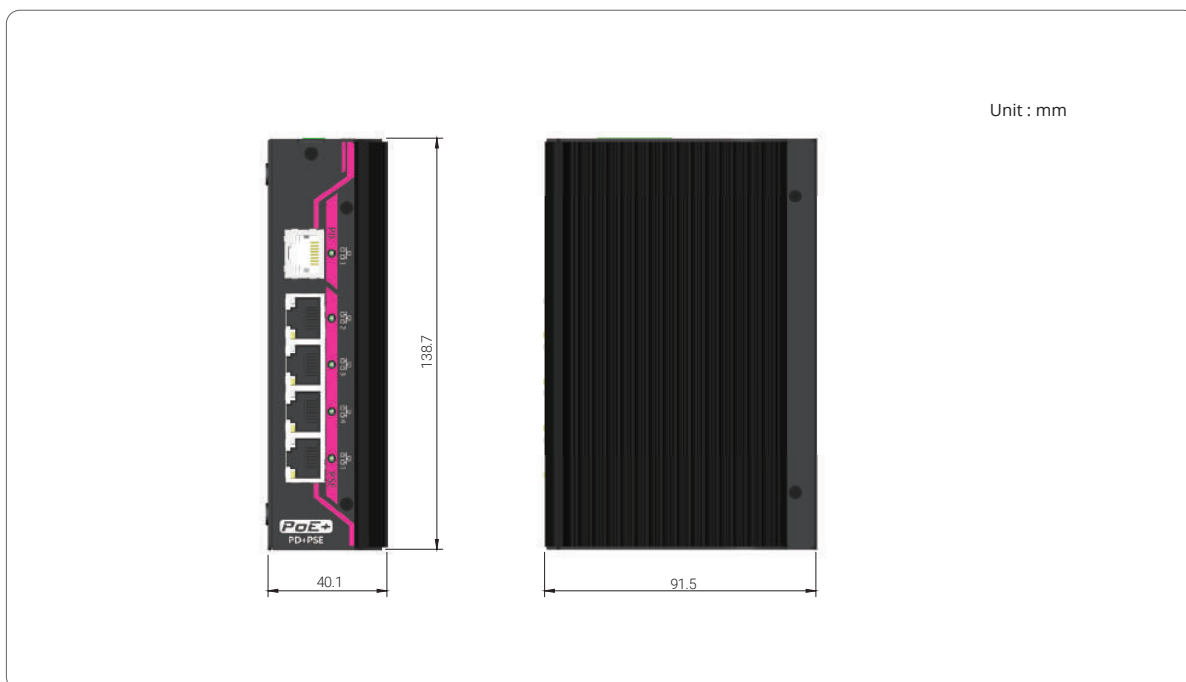

Ordering Information

Model No.	Product Description
EDX-104J	5-port IEEE 802.3at PoE+ unmanaged Gigabit Ethernet switch with PD/DC dual power mode, RJ45 connector and IP50 housing

Optional Accessories

PA-280W-ET2	280W AC/DC power adapter 24V/11.67A;16AWG/100cm; cord end terminals for terminal block, operating temperature : -30 to 60 °C.
-------------	---

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660