



Industrial Solutions Partner!

## SSF/SSH2945-A

### 29.4" Resizing LCD, 1000 nits LED backlight, 1920 x 720

The SSF/SSH2945-A is a 29.4 inch color TFT-LCD display with high brightness 1000 nits and high color saturation. it produce sharp images, crisp text and lifelike colors. The Spanpixel LED backlight technology ensures high reliability and low power consumption, suitable for outdoor application, kiosk, factory automation, military, transportation and gaming application.

#### Key Features

- 29.4" Resizing LCD
- Ultra-Wide Screen (16 : 6)
- High Brightness 1000 nits
- LED Backlight
- Wide viewing angle 178°(H)~ 178°(V)
- Low Power Consumption
- BL MTBF: 100,000 hours



#### Specifications

| Model Name              | SSF/SSH2945-A                                                |
|-------------------------|--------------------------------------------------------------|
| Description             | 29.4" Resizing LCD, 1000 nits LED backlight, 1920x720        |
| Screen Size             | 29.4"                                                        |
| Display Area (mm)       | 698.4(H) x 261.9(V)                                          |
| Brightness              | 1000 cd/m <sup>2</sup>                                       |
| Resolution              | 1920x720                                                     |
| Aspect Ratio            | 16 : 6                                                       |
| Contrast Ratio          | 5400 : 1                                                     |
| Pixel Pitch (mm)        | 0.36375(H) x 0.36375(V)                                      |
| Pixel Per Inch (PPI)    | 70                                                           |
| Viewing Angle           | 178°(H), 178°(V)                                             |
| Color Saturation (NTSC) | 87%                                                          |
| Display Colors          | 16.7M                                                        |
| Response Time (Typical) | 6.5ms                                                        |
| Panel Interface         | LVDS                                                         |
| Video Interface         | HDMI, DP                                                     |
| Input Power             | DC12V                                                        |
| Power Consumption       | 37W (with AD Board 40W)                                      |
| OSD Key                 | 4 Keys (Power Switch, Menu, +, -)                            |
| OSD Control             | Brightness, Color, Contrast, Auto Turing, H/V Position...etc |
| Dimensions (mm)         | 735.4 x 302.6 x 20.9                                         |
| Bezel Size(U/B/L/R)     | 22.7/18/18.5/18.5                                            |
| Weight (Net)            | 3.2 kg                                                       |
| Operating Temperature   | 0 °C ~ 50 °C                                                 |
| Storage Temperature     | -20 °C ~ 60 °C                                               |

SSF= Panel + LED Driving Board

SSH= Panel + LED Driving Board + AD Control Board

Specifications are subject to change without notice.

All brands or product names are trademarks or registered trademarks of their respective companies.






Industrial Solutions Partner!

## Mechanical Drawing

### Outline Dimensions



Unit: mm

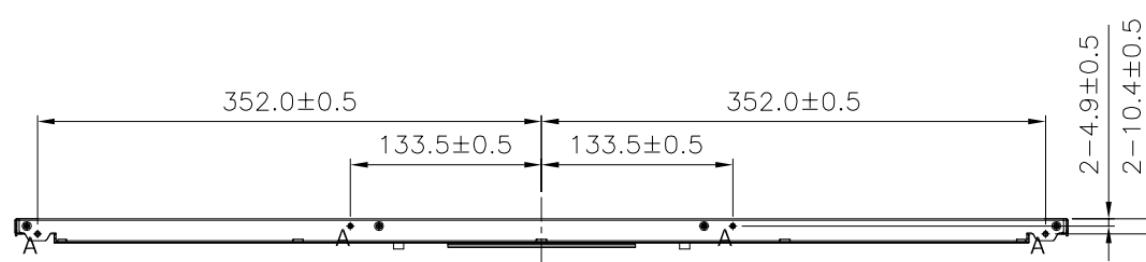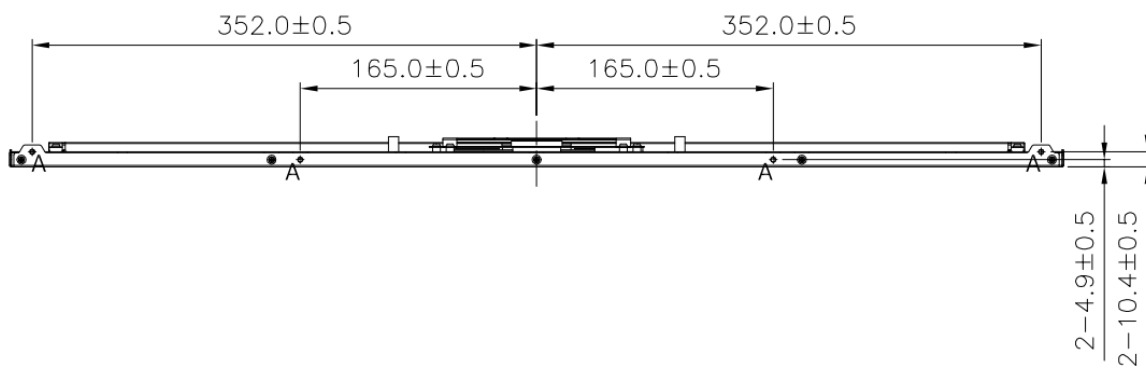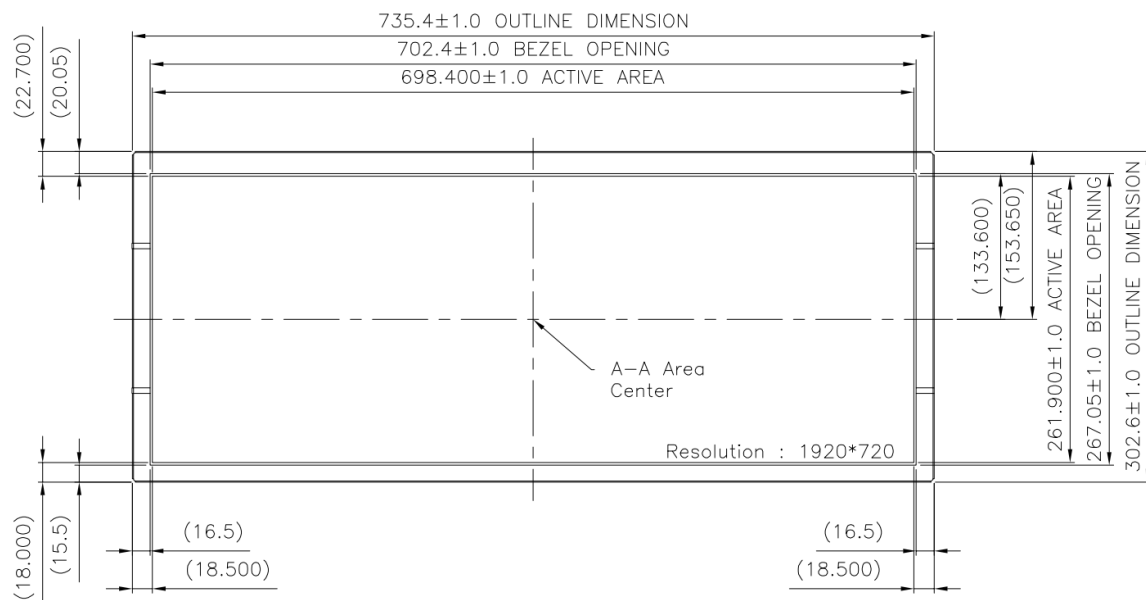

|   |                                           |
|---|-------------------------------------------|
| A | M3 MOUNTING HOLE (12X) DP=5.0mm MAX SCREW |
|---|-------------------------------------------|



Industrial Solutions Partner!

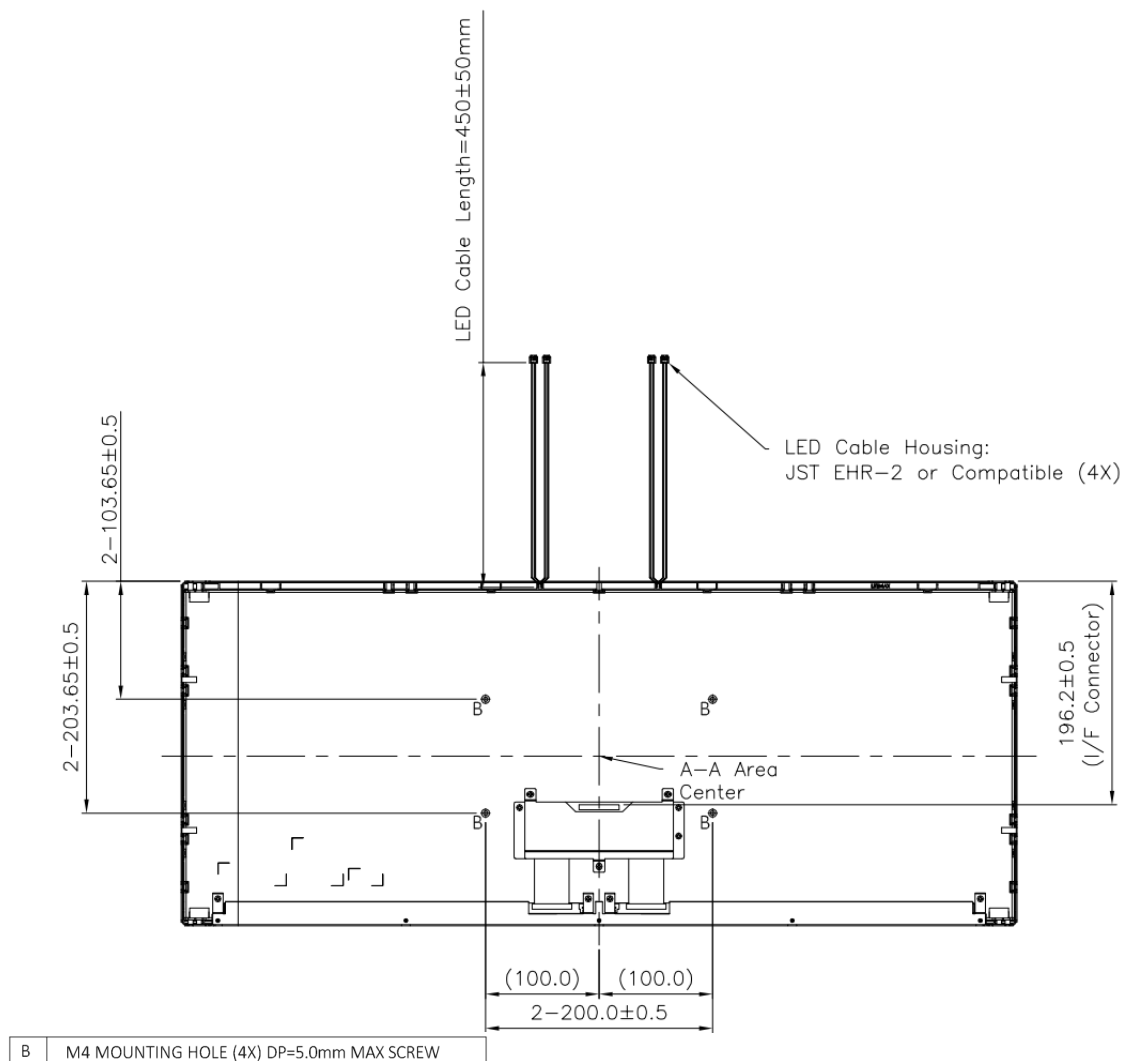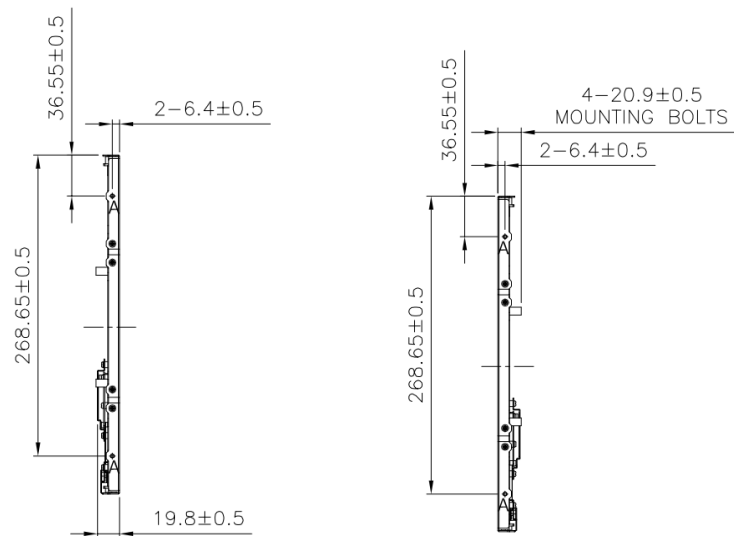



Industrial Solutions Partner!

Note :

1. Resolution: 1920x720
2. "( )"marks the reference dimensions
3. Front Case is black paint

## Ordering Information

| Part Number            | Description                                                   |
|------------------------|---------------------------------------------------------------|
| <b>SSF2945-ANN-A11</b> | 29.4", 1000nits, 1920x720, LID29C, 5in1, V1                   |
| <b>SSH2945-ANN-T11</b> | 29.4", 1000nits, 1920x720, LID29C, AD68862HP, DC12V, 5in1, V1 |
|                        |                                                               |

## Optional Accessories

| Part Number         | Description                                                                             |
|---------------------|-----------------------------------------------------------------------------------------|
| <b>840612051212</b> | ADAPTER, AC/DC, 12V/5A, 60W, Power-Din-4P, CWT, G99-ABF060F-N022, Efficiency-level-6, R |
| <b>810618301010</b> | CABLE.POWER.AC.1830mm USA type                                                          |
| <b>810618301090</b> | CABLE, POWER, AC, 1830mm Europe type                                                    |
| <b>810618301050</b> | CABLE.POWER.AC.1830mm UK type                                                           |
| <b>810618301170</b> | CABLE.POWER.AC, 1830mm Australia type                                                   |
| <b>810618301031</b> | CABLE.POWER.AC.1830mm Japan type                                                        |

## By Customer Request

|              |                                 |
|--------------|---------------------------------|
| <b>Glass</b> | Tempered glass, AR coating..... |
| <b>Touch</b> | PCT, SCT, Resistive.....        |

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660