

15" Marine Bridge System Display

Model # R15T600-MRA1







Features:



- | | |
|---------------------------------|--|
| ■ Hyper Dimming | : Dimming knob control backlight brightness from nearly 0% to 100% |
| ■ Sunlight Readable | : Transflective film technology enhance visibility |
| ■ Anti-Corrosion & IP Proof | : IP65 aluminum housing with powder coating design (IP54 rear) |
| ■ Wide Voltage Range Input | : 9 to 36V DC to DC power input acceptable (AC power for option) |
| ■ Touchscreen/ Protection Glass | : High quality touchscreen / AR protection glass for option |
| ■ Multiscan Function | : PIP(picture in picture) function and multi-video inputs |
| ■ IP65 OSD Fornt Panel Design | : Ease of use front panel OSD control |
| ■ Anti-Shock and Vibration | : Enhanced shock and vibration resistance |



Mechanical Design Drawings

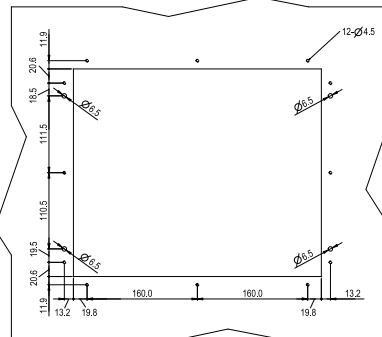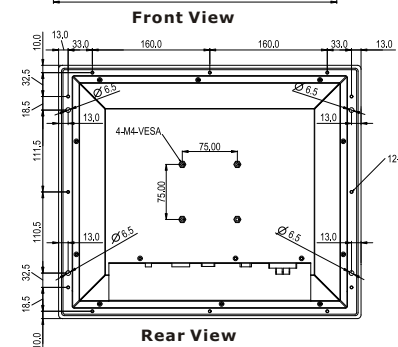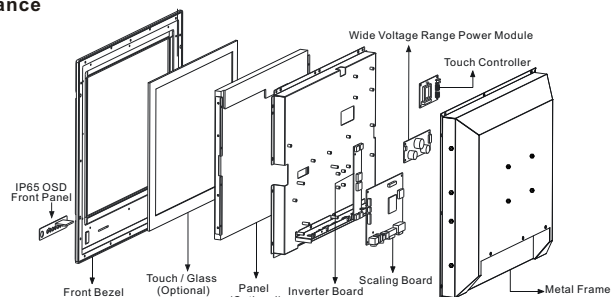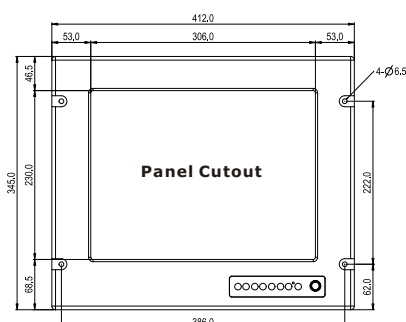

All Dimensions are ± 0.5 mm

* Note: this is a simplified drawing and some components are not marked in detail.
Please contact our sales representative if you need further product information.

TFT Characteristics:

Pixel Number	: 1024 x 768
Pixel Pitch(RGB)	: 0.297 (H) x 0.297 (V) mm
Contrast Ratio	: 500:1(typ.)
Light Intensity	: 550 cd/m ² (typ.)
Viewable Angles	: -70~70(H);-50~70(V)
Active Display Area	: 304.1 (H) x 228.1 (V) mm
Max Colors	: 16.2M (6bit+FRC/colors)

Input Signals:

RGB Signal	: D-SUB 15P connector(female)
Composite Video	: RCA phono plug
S-Video Signal	: S-Video (SVHS) plug
DVI-D Signal	: DVI-D input 24pin connector
DC Power Signal	: Screw terminal block
AC Power Signal (Optional)	: Std IEC Inlet
Touch Screen (Optional)	: D-SUB 9P connector (female)
Remote via RS-232 (Optional)	: D-SUB 9P connector (female)

User Controls:

- Power On/Off via front button
- VR Brightness Knob Control
- Power Mode Status LED
- On Screen Display control(OSD)
- OSD Remote Control via RS-232

Power Specifications:

Power Supply Options	: 9 to 36 V DC power supply with Terminal block (Default), 90 to 265V AC powersupply
Power Consumption	: 40 W typical, normal operation

Mechanical and Environmental:

Mechanical Mounting	: Panel (Flush) mount with IP65*, VESA, Bracket mounting
Operating Temperature	: -10 to 55 deg.C
Operating Humidity	: 5% to 95% (non condensing)
Anti-Vibration	: 5Hz~500Hz / 1Grms/3 Axis
Anti-Shock	: 15G, 11ms duration
* SAW touch for IP54	

Available Options:

Touch Screen Options	: SAW, 5 Wire Resistive
AR Safety Glass Options	: 3mm Anti-reflective protection glass
Transflective Options	: Yes (Enhance Visibility)
AC power Options	: Yes (90 to 265 V AC power input)
Bracket Mounting Options	: Yes (One robust bracket can adjust from -10 to 30 deg.)

Certification and Approvals : CE, FCC



Note: All Specifications are subject to change without prior notice!


Revised Date : 02/16/2011




15" Marine Bridge System Display

Model # R15T600-MRA1


Mechanical Design with Robust Bracket (options)

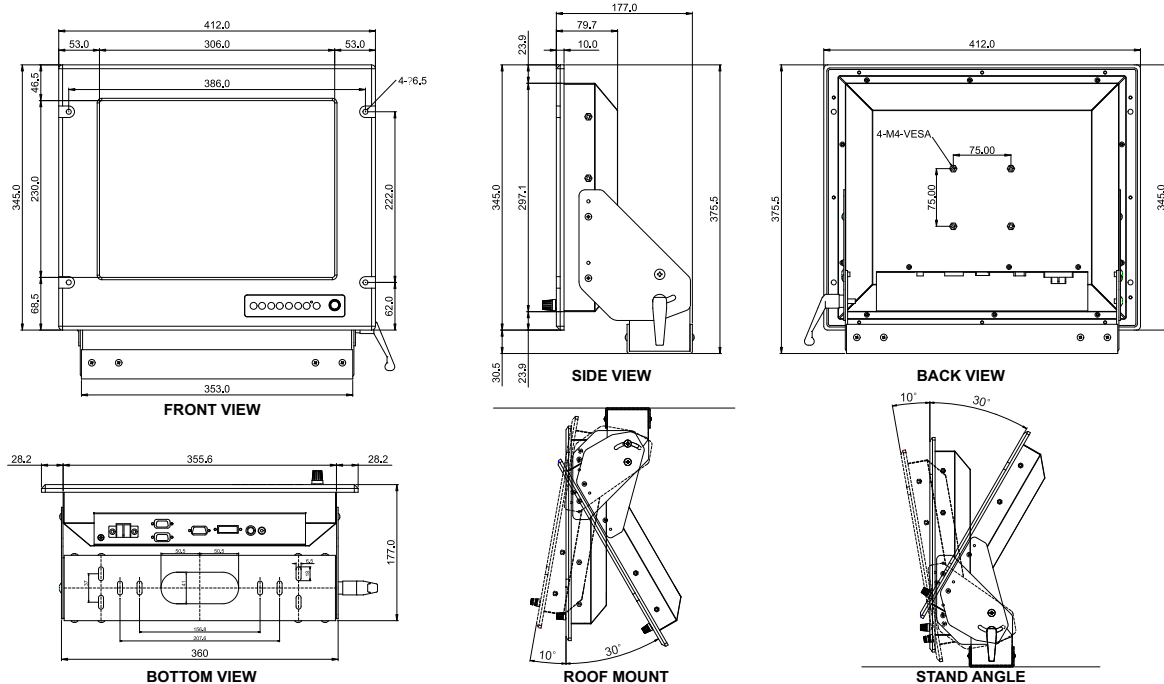

ROOF MOUNT

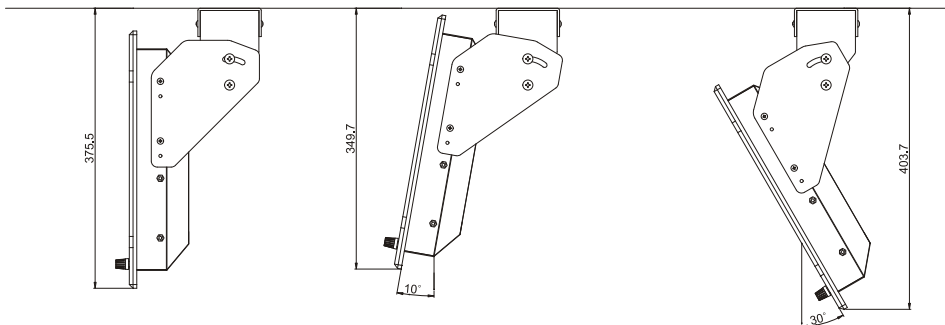

STAND ANGLE

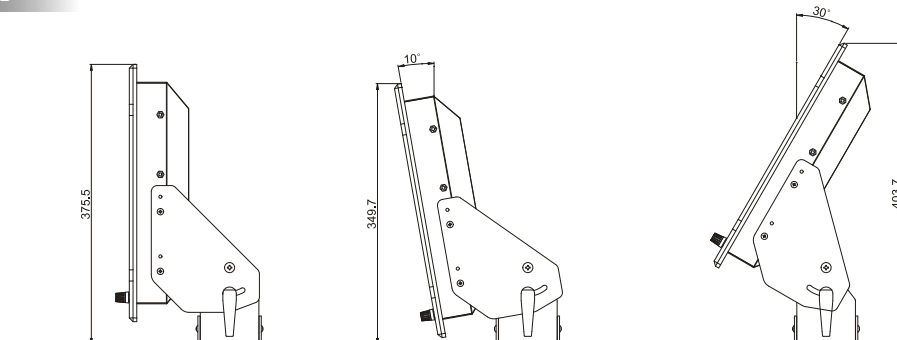

All Dimensions are ± 0.5 mm

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Certification and Approvals : CE, FCC



* Extra charge is required for back covers with bracket holes for products purchased before end of Nov. 08'

Rev.	Reasons	Revised Date
1.0	Add holes for brackets on back cover*	Nov-17-08
1.1	Spec change	Feb-16-11

Note: All Specifications are subject to change without prior notice!

Revised Date : 02/16/2011

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660