


DI SERIES

DI651ST2


65" Fanless Digital Signage Display



**24 / 7
OPERATION**



FANLESS



**BUILT-IN
MEDIA PLAYER**



**IP5X
DUST RESISTANT**



**TRUECOLOR™
CALIBRATED**

FOR MORE INFORMATION

For more information about DynaScan, visit our site at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.

DynaScan


V1.01

SPECIFICATION


MODEL	DI651ST2	
PANEL	LCD Panel Size	64.53 inches LCD
	Native Resolution	1920 x 1080
	Backlight	LED
	Default Color Temperature	D65 (6500 K)
	Brightness	800 nits
	Color Depth	10 bits
	Contrast Ratio	3000 : 1
	Response Time	10 ms
	Viewing Angle (H/V)	178° / 178°
	Light Life Time (Typ.)	50,000 hrs
POWER	Blackening Defect Free	Up to 110°C (230°F)
	Panel Surface	AG Haze 1%, 3H
	Power Supply	Internal
MECHANICAL SPECS	Rated Voltage	100-240V ~ 50/60Hz
	Power On Mode (Typ./ Max.)	140 W / 185 W
	Power Saving Mode	< 1 W
USER INTERFACE	Bezel Width (T/B/L/R)	22 / 22 / 12.9 / 12.9 mm
	Cabinet Color	Black
	Monitor Dimension (LxHxD)	1457 x 851 x 60 mm
	Monitor Weight	40 kg
	Orientation	Portrait / Landscape
	VESA Mounting (LxH)	400 x 400 mm
	Carring Handles	Yes
	Fanless Design	Yes
	Language	English
	Built-in Video Wall Support	Up to 15x15
INPUT	Support SNMP (Up to V3.0)	Yes
	Dimming Control	Yes
	Proof of Image Retention	Yes
	Auto Orientation Sensor	Yes
	Ambient Light Sensor	Yes
OUTPUT	Power On/Off Scheduling	Yes
	Internal Temperature Sensor	Yes
	OSD Menu Rotation	Yes
	HDMI	x1 (1080p)
	DVI-D	x1
EXTERNAL CONTROL	Display Port	x1
	USB	x1 (For Internal Player)
	SD Slot	x1 (For Internal Player)
	DVI-D	x1
	Audio	x1
INTERNAL PLAYER	RS-232	In x1, Out x1
	RJ-45	x1 (LAN)
	Processor	ARM Quad-Core Cortex-A9
	Clock speed	1.6 GHz
	Main memory interface	DDR3L-1066, 1GB
	Graphics	Mali400MP4, support OpenGL ES1.1/2.0, Open VG1.1
	Storage	Internal: Nand flash 8GB(multi sources) External: Support SD , Up to 32GB
	Multimedia	Multi-format 1080P video decoders (H.264,VC-1, MPEG-1/2/4, H.263, H.264 MVC, AVS, VP8/6, RV)
	Wi-Fi Specification	802.11 b/g/n 2412.0MHz - 2462.0MHz
	Operating System	Android 4.4.2
ENVIRONMENT	Operating Temperature	0° C ~ 40° C
	Storage Temperature	-20° C ~ 60° C
	Humidity	10% ~ 80% RH Non-condensing
CERTIFICATION	CE / FCC / RoHS	
	Dust resistant design	IP5X

DIMENSIONS

Unit: mm [inch]

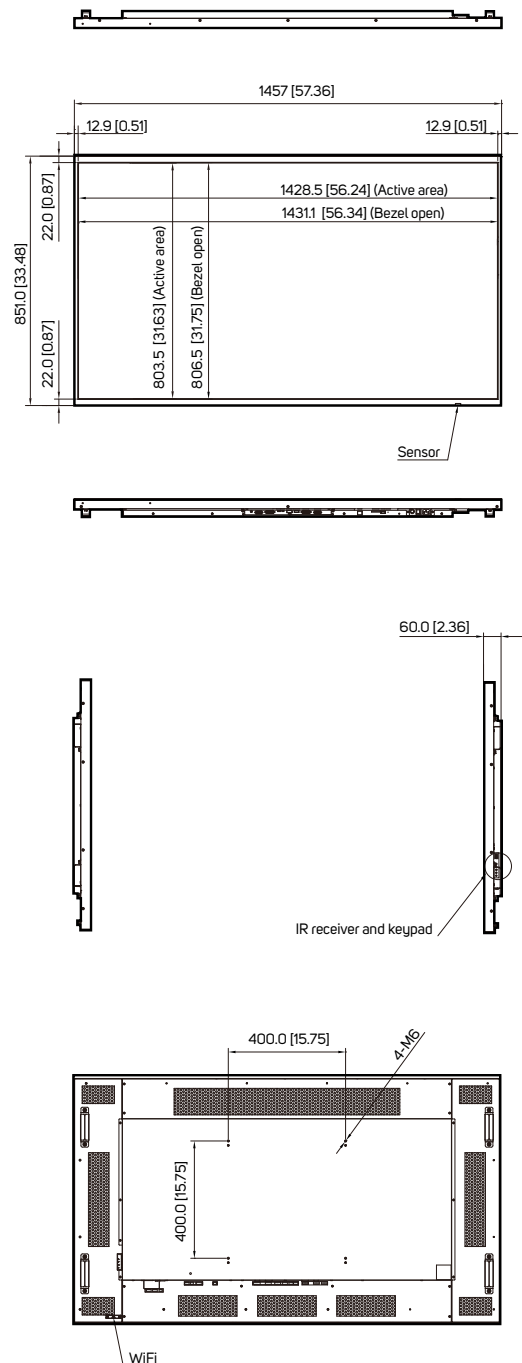

INTERFACE

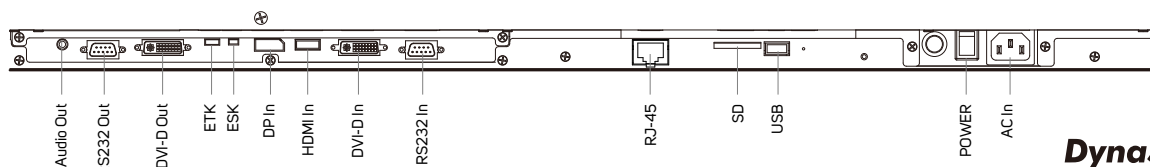

DynaScan

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660