


NEX 650

Mini-ITX Form Factor
with Onboard Intel® Celeron® Processor J1900 Product Family

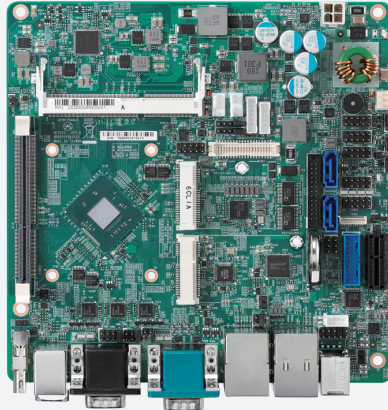

Main Features

- Intel® Celeron® processor J1900
- Integrated Intel® Gen7 Intel® Graphics DX 11*, OGL3.2
- Supports dual channel DDR3 1333MHz, 2 x SO-DIMM, up to 8GB system memory
- 3 x COM (RS-232/422/485), 2 x COM (RS-232); 1 x HDMI, 1 x D-Sub,
- 1 x Dual channel 24-bit LVDS; 4 x USB 3.0, 6 x USB 2.0, 2 x SATA2;
- Gigabit LAN : 2 x Realtek LAN
- 12~24 V DC-in power support

Product Overview

NEX 650 is the NEXCOM most advanced flagship Mini-ITX form factor powered by onboard 4-core Intel® Celeron® J1900 processor (codenamed Bay Trail) that integrates with 24/48-bit LVDS & upto 8GB DDR3/L memory & rich I/Os.

NEX 650 represents a powerful model for intensive multi-media & high computing base application which can be embedded into fan-less or 1U/2U rack mounted chassis as customized system-ready PBOX solution. The wide range 12~24V DC-in.

Specifications

Form Factor

- Dimensions: Mini-ITX (6.7-in x 6.7-in)

Processor System

- CPU: Intel® Celeron® processor J1900
- Core number: 4
- Max speed: (by CPU)
- L3 cache: 2MB
- Chipset: N/A
- BIOS: UEFI

Expansion Slot

- mini-PCIe: 1 (full size)
- mSATA: 1
- PCIe: 1

Memory

- Technology: dual channel DDR3L 1333 MHz SDRAM
- Max.: 8GB
- Socket: 2 x SO-DIMM

Graphics

- Controller: Intel® Gen7 Intel® graphics DX 11*, OGL3.2
- VRAM: shared memory
- VGA: supports max. resolution 1920 x 1200
- LVDS: dual channel 24-bit, max resolution 1920 x 1200@60Hz
- HDMI: supports HDMI 1.3a, max resolution 1920 x 1200

Ethernet

- Ethernet: 10/100/1000 Mbps
- Controller: GbE LAN: 2 x Realtek RTL8111G-CG
- Connector: 2 x RJ-45

SATA

- Max. data transfer rate: SATA2 (3.0 Gb/s)
- Rear I/O
- VGA: 1
- HDMI: 1
- Ethernet: 2
- USB: 4 (2 x USB 3.0, 2 x USB 2.0)
- Audio: 2 (Mic-in, Line-out)
- Serial: 3 (RS-232/422/485)
- PS2: 2 (1 x keyboard, 1 x mouse)


Internal Connector

- USB: 6 (2 x USB 3.0, 4 x USB 2.0)
- LVDS/inverter: 1/1
- VGA: 1 (shared with rear I/O VGA COM)
- Serial: 2 (RS-232)
- SATA: 2 x SATA2 (3.0Gb/s)
- mPCIe: 1
- Parallel: 1
- mSATA: 1 (shared)
- GPIO 8-bit: 4 x GPI + 4 x GPO
- SATA PWR output con: 1
- Speaker header: 1

www.nexcom.com



Block Diagram

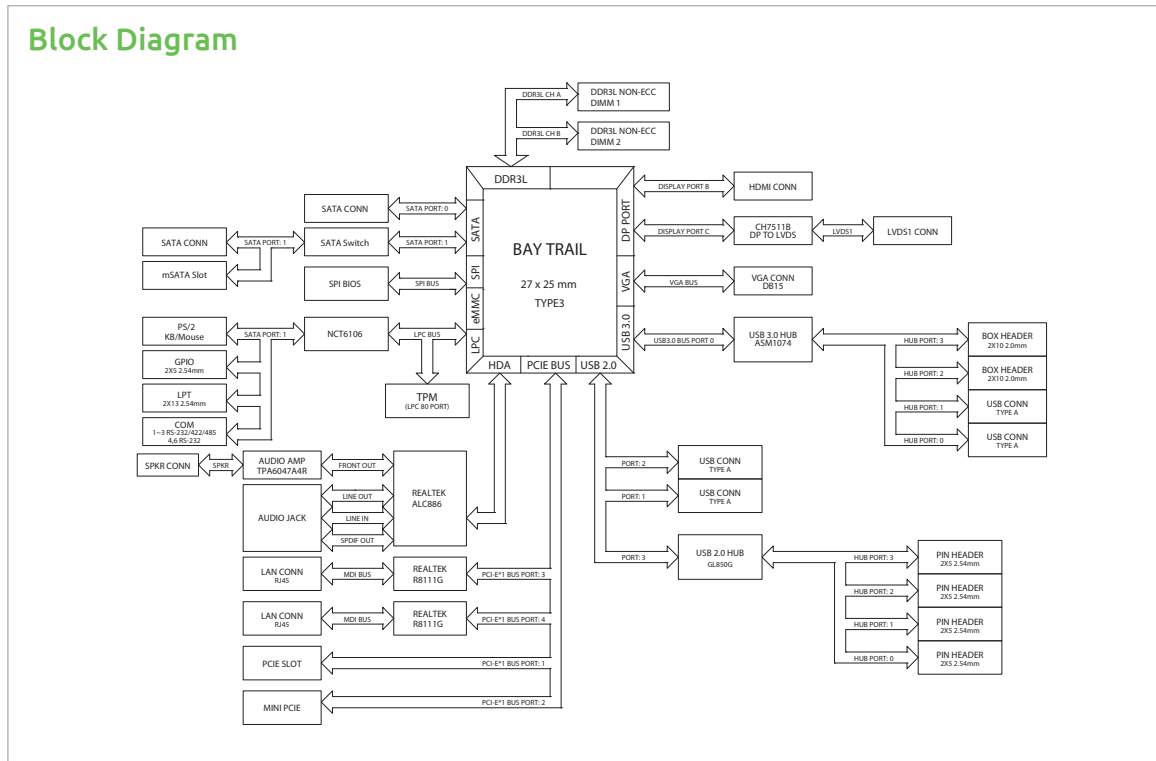

Watchdog Timer

- Output: from super I/O to drag RESETCON#
- Interval: 256 segments, 0,1,2...255sec/min

Power Requirements

- Input PWR: 12~24V DC-in (4-pin ATX PWR Con)
- Power on: AT/ATX supported
- AT: directly PWR on as power input ready
- ATX: press button to PWR on after power input ready

Environment

- Temperature: 0°C~60°C

Ordering Information

♦ NEX 650 (P/N: 10G00065001X1)

Mini-ITX form factor powered by onboard 4-core Intel® Celeron® J1900 processor that integrates with 24/48-bit LVDS & up to 8GB DDR3/L memory & Rich I/Os

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660