

In-Window Display Series - SVFSDH550

Sureview 55" Digital Rod Displays




Screen Size

55"
(54.64" measured diagonally)

HD Series

- Brightness : 2,500 cd/m² Typical, customized 1500-5000cd/m²
- Interface : HDMI,USB,VGA

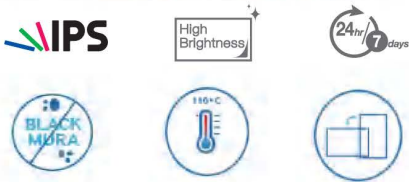

Other Features

Cost Effective




Low Power Consumption Using The M+ Panel

The M+ panel offers excellent energy efficiency and cost savings and decreases power consumption compared to conventional RGB panels




Smart Brightness Control

The auto brightness sensor adjust backlight brightness according to the ambient brightness to save power energy and protect the human eye.

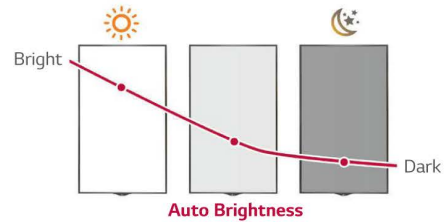

Connectivity

DC12V power in	HDMI in	VGA in	PC Audio in	USB
---------------------------	--------------------	-------------------	------------------------	------------



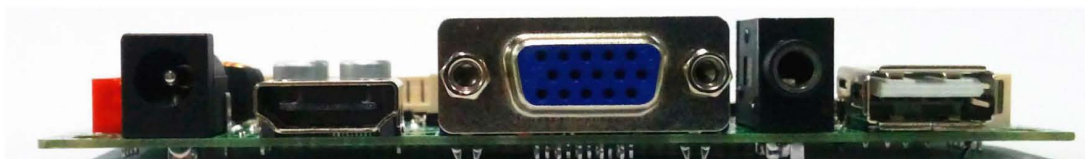


In-Window Display Series - SVFSDH550

Sureview 55" Digital Rod Displays



Dimensions (unit : mm)

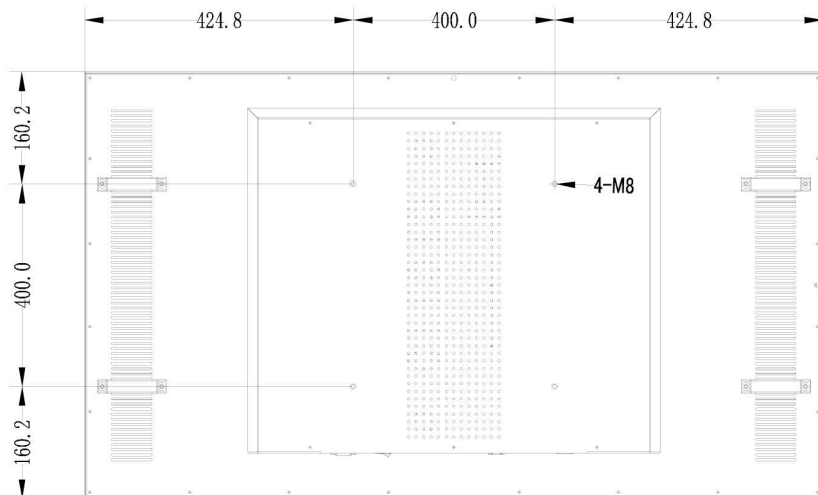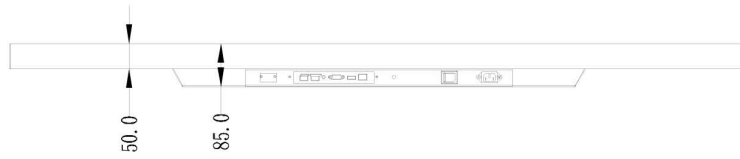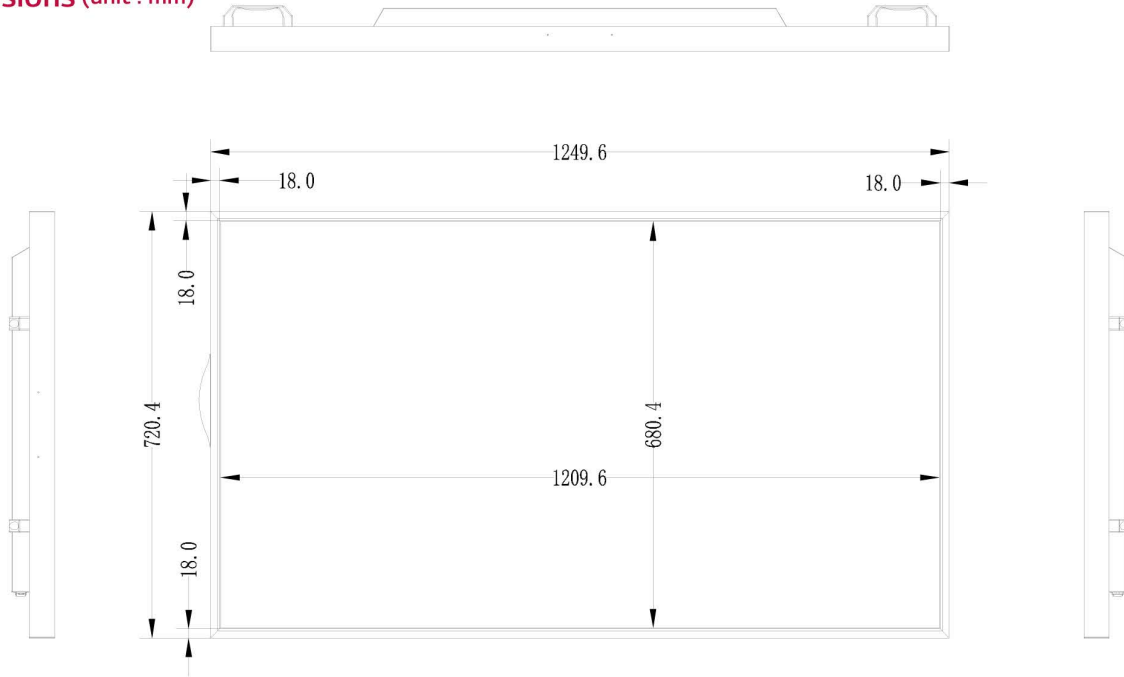

SUREVIEW

Specifications

SUREVIEW

HD Series

SVFSD550

PANEL	Screen Size	55" (54.64" measured diagonally)	
	Panel Technology	IPS	
	Aspect Ratio	16:9	
	Native Resolution	1,920 x 1,080 (FHD)	
	Brightness	2,500cd/m (Typ.), Customized 1500-5000cd/m ²	
	Contrast Ratio	1,000:1	
	Dynamic CR	500,000:1	
	Viewing Angle (H x V)	178 x 178	
	Surface Treatment	/	
	Orientation	Landscape & Portrait	
CONNECTIVITY	Input	HDMI, USB,VGA	
	Output		
	External Control	IR Receiver,Auto-Dimming Sensor	
PHYSICAL SPECIFICATION	Bezel Color	Black	
	Bezel Width	18mm(T/B/L/R)	
	Monitor Dimension (W x H x D)	1249.60x720.40x85.00mm	
	Weight (Head)	33.0kg	
	Carton Dimensions (W x H x D)	TBD	
	Packed Weight	TBD	
	VESA™ Standard Mount Interface	400x400 mm	
SPECIAL FEATURES	Temperature sensor, Auto brightness sensor, Silent fans cooling Source selection, Brightness/Contrast/Backlight select Energy saving, Smart energy saving		
ENVIRONMENT CONDITIONS	Operation Temperature Range	0°C to 45°C (w/o Direct sunlight) 0°C to 35°C (Direct sunlight)	
	Operation Humidity Range	10% to 80%	
POWER	Power Supply	100-240 V~, 50/60 Hz	
	Power Type	Built-In Power	
	Power Consumption	Typ	300W
		Max	330W
STANDARD (CERTIFICATION)	Safety	/	
	EMC	CE	
ACCESSORIES	Included Accessories	Remote controll(w/o battery) ,AC power plug	
	Optional Accessories	/	

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660