


AI Vehicle Computer

COMPACT AI Vehicle Series

Intelligent Machine Learning Unit with NVIDIA Jetson Xavier NX

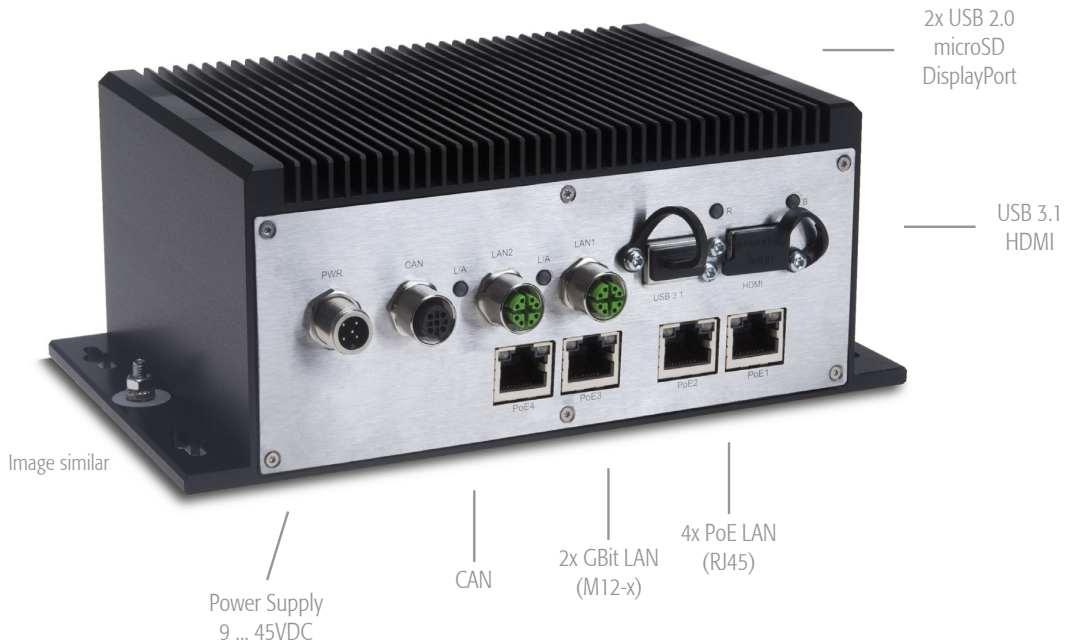

AI Vehicle Computer

IPC/COMPACT A3N - RM

This fanless COMPACT A3N generation is based on the NVIDIA Jetson Xavier NX processor module and offers a wide range of interface options.

The robust and uncompromising industrial design allows the implementation in the most demanding mobile AI applications and guarantees long term availability.

- Power over Ethernet (PoE+), 48VDC out
- 24/7 continuous operation
- 6 total LAN Interfaces with individual NIC's
- Passively cooled, no moving parts
- Long term availability with fixed BOM



Linux for Tegra (L4T)

Product Highlights

Maintenance free
Power Ignition Controller
Shock and vibration resistant
Each LAN interface has its own dedicated NIC
No moving parts / passively cooled

Product Features

384-core NVIDIA Volta™ GPU with 48 Tensor Cores
6-Core ARM v8.2 64-bit NVIDIA Carmel CPU
8GB / 16GB 128-bit LPDDR4x RAM
M.2 NVMe slot for storage expansion up to 2TB
USB 3.1 and HDMI 2.0 ports
Gbit Ethernet, CAN 2.0 A/B
Anodized aluminum & stainless steel housing

Markets / Applications

Autonomous Mobile Robots (AMRs)
Automotive
Transportation
Robotics
CCTV



Order Code IPC/RMA3NI19-G202S^{1,5}

AI Vehicle Computer

Processor module / Performance

NVIDIA Jetson Xavier NX 384-core NVIDIA Volta™ GPU with 48 Tensor Cores	•
6-Core ARM v8.2 64-bit NVIDIA Carmel CPU	
NVIDIA Jetson Xavier NX (16GB RAM) 384-core NVIDIA Volta™ GPU with 48 Tensor Cores	optional
6-Core ARM v8.2 64-bit NVIDIA Carmel CPU	

Memory / Storage

Data Cache Size	2MB
128-bit LPDDR4x RAM soldered on board	8GB
eMMC 5.1 Flash Storage on board	16GB
M.2 2280 Key M socket (for NVMe SSD) ⁵	1
microSD card socket ²	1

Features

Real time clock (RTC) with battery backup Renata CR2477N (950mAh)	•
Hardware Watchdog & Temperature supervisor	•
Buzzer	•

Communication Interfaces

Display output ¹ behind the service cover	DisplayPort 1.4
Internal USB version 2.0 OTG ¹ behind the service cover	(micro USB Type AB) 1
USB version 2.0 ¹ behind the service cover	(Type A) 2
Display output	HDMI 2.0
USB version 3.1 (5 Gbit/s)	(Type A) 1
USB version 2.0 ¹	(Type A) optional
Ethernet 10/100/1000 BASE-T (1x native, 1x I210-IT)	(M12 female, x-coded) 2
Power over Ethernet - IEEE802.3at 10/100/1000Mbit	(M12 female, x-coded) 4
PSE - Power sourcing equipment, producing 48VDC out	(total max power: 39W)
CAN 2.0A / CAN 2.0B (active/passive), CAN FD supported, isolated	(M12 female, a-coded) 1
Mini PCIe socket ² , used for extensions depending on configuration	2
I2C bus ²	1
Serial RS232 ¹ , up to two ports available internally	(M12 male, a-coded) on request
Digital I/O's, 24VDC ¹	(up to 4 inputs & 4 outputs) on request
Analog input1, 0-20mA or -10...+10V / 0... 30V ¹ , (16bit resolution Accuracy: +/- 0.1%)	(4 inputs) on request
MIPI CSI-2 / GMSL2 / FPDLinkIII Camera interface ¹	on request

Technical Data

Dimensions [mm] (housing, excl. mounting)	w182 x h80 x d130
Dimensions [mm] (housing, incl. mounting)	w218 x h80 x d130
Net weight [gram]	~ 1900
Non isolated input voltage, with ignition controller, reverse polarity protected	(M12 male, a-coded) 9... 45VDC
Idle power consumption typ. in Watt @ 24V without Add-Ins	~ 12

Environmental Conditions

Operating temperature ³	-25°C ... +65°C
Storage temperature	-25°C ... +85°C
Ingress protection standard according to EN60529	IP40
Conformal coating ⁴	on request
Road vehicles: UNECE-R10 (E-mark)	on request
Shock (designed to meet)	EN60068-2-27
Vibration (designed to meet)	EN60068-2-64
EMI-Conformity (designed to meet)	EN55032 / EN55035
Safety (designed to meet)	EN62368-1
MTBF @ 25°C ambient ¹ according to Telcordia SR-332, Environment GB, excluding battery and SSD	~ 415 000h

¹ Please contact factory for minimum order quantities

² Internal connector

³ Depending on installation situation and interface connection. Please see user documentation

⁴ On all possible components (excl. Xavier NX module, connectors and wireless devices)

⁵ It is possible to equip the products with an Industrial grade Apacer PV210 NVMe SSD. Retrofitting an SSD is not possible by the user without complete disassembly. Use these part codes:
IPC/RMA3NI19-G202S-01 = 128GB | IPC/RMA3NI19-G202S-02 = 256GB | IPC/RMA3NI19-G202S-05 = 512GB | IPC/RMA3NI19-G202S-10 = 1TB

Product specifications subject to change without notice. | All data is for information purposes only and not guaranteed for legal purposes. Information in this data sheet has been carefully checked and is believed to be accurate. However, no responsibility is assumed for inaccuracies. Please refer to the user documentation for additional product specification.

© 2023 Syslogic Datentechnik AG
All rights reserved

Syslogic Datentechnik AG
Tafernstrasse 28
CH-5405 Baden Dättwil

Version 1.3 | December 2023

For further information and support:
info@syslogic.com
support@syslogic.com
www.syslogic.com

+41 56 200 90 40
+49 7741 9671-420

Switzerland (Headquarters)
Germany and Austria

 **syslogic**
industrial computing

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660