

W07L100-PCT1

7" Multi-Touch Chassis Display



KEY FEATURES

- 7" 1024 x 600 Resolution, Multi-Touch Chassis Display
- Projected Capacitive Multi-Touch (P-Cap)
- Front IP65 Water and Dust Proof
- VGA input and variety of optional connectors
- USB port for touch
- Stylish and elegant design




SPECIFICATIONS

Contrast Ratio 1000:1	Display			
Display Color 16.7M Colors View Angles 75,75,70 Active Area 153.6x90 mm Touch / Glass Projected Capacitive Multi Touch Screen	Resolution	1024x600	Size	7.0 inches
Active Area 153.6x90 mm Touch / Glass Projected Capacitive Multi Touch Screen Environment Operating Humidity 10% to 90% RH, Non-Condensing Operating Temperature 10°C to 60°C Storage Temperature -10°C to 60°C Certification Certification CE, FCC IO Ports USB Port 1 x USB for Touch Screen Video 1 x VGA 1 x HDMI (Optional) 1 x DVI	Contrast Ratio	1000:1	Panel Brightness	320.0 nits
Environment Operating Humidity 10% to 90% RH, Non-Condensing Operating Temperature 7-10°C to 60°C Temperature 7-10°C to 50°C Temperature 7-10°C Temp	Display Color	16.7M Colors	View Angles	75,75,75,70
Operating Humidity 10% to 90% RH, Non-Condensing Temperature 7-0°C to 60°C 7-10°C 7-10°C to 60°C 7-10°C 7-10	Active Area	153.6x90 mm	Touch / Glass	Projected Capacitive Multi Touch Screen
Temperature Temperature -10°C to 60°C Certification Certification CE, FCC IO Ports USB Port	Environment			
Temperature Certification CE, FCC IO Ports USB Port	Operating Humidity	10% to 90% RH, Non-Condensing		0°C to 50°C
Certification CE, FCC IO Ports USB Port 1 x USB for Touch Screen Video 1 x VGA 1 x HDMI (Optional) 1 x DVI (Optional) Audio 1 x Speaker (Optional) Mechanical Dimension 189.4 x 145.4 x 39.8 mm Weight 0.68 kg Mounting VESA Mount Enclosure Metal Cooling System Fanless Design Accessory Accessory 1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Power Rating 12V DC in Control Control	Storage Temperature	-10°C to 60°C		
USB Port 1 x USB for Touch Screen Video 1 x VGA 1 x HDMI (Optional) Audio 1 x Speaker (Optional) Mechanical Dimension 189.4 x 145.4 x 39.8 mm Weight 0.68 kg Mounting VESA Mount Enclosure Metal Cooling System Fanless Design Accessory Accessory 1 x VGA cable 1 x HDMI cable 100-240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Power Rating 12V DC in Control	Certification			
USB Port 1 x USB for Touch Screen Video 1 x VGA 1 x HDMI (Optional) Audio 1 x Speaker (Optional) Mechanical Dimension 189.4 x 145.4 x 39.8 mm Weight 0.68 kg Mounting VESA Mount Enclosure Metal Cooling System Fanless Design Accessory Accessory 1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Power Rating 12V DC in Control	Certification	CE, FCC		
Audio 1 x Speaker (Optional) Mechanical Dimension 189.4 x 145.4 x 39.8 mm Weight 0.68 kg Mounting VESA Mount Enclosure Metal Cooling System Fanless Design Accessory Accessory 1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Power Rating 12V DC in 1 x HDMI (Optional) 1 x DVI (Optional) 1 x HDMI (Optional) 1 x DVI (Optional) 1 x D	IO Ports			
Mechanical Dimension 189.4 x 145.4 x 39.8 mm Weight 0.68 kg Mounting VESA Mount Enclosure Metal Cooling System Fanless Design Accessory Accessory 1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Power Rating 12V DC in Control	USB Port	1 x USB for Touch Screen	Video	1 x HDMI (Optional)
Dimension 189.4 x 145.4 x 39.8 mm Weight 0.68 kg Mounting VESA Mount Enclosure Metal Cooling System Fanless Design Accessory Accessory 1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Rating 12V DC in Control	Audio	1 x Speaker (Optional)		
Mounting VESA Mount Enclosure Metal Cooling System Fanless Design Accessory Accessory 1 x VGA cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Rating 12V DC in Enclosure Metal Metal Metal Metal Metal Accessory Remote Controller (Optional, Varies by product) Power Controller Accessory 1 x VGA cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Accessory 1 x VGA cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Accessory 1 x VGA cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product)	Mechanical			
Cooling System Fanless Design Accessory Accessory 1 x VGA cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Rating 12V DC in 12V DC in	Dimension	189.4 x 145.4 x 39.8 mm	Weight	0.68 kg
Accessory Accessory 1 x VGA cable 1 x HDMl cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Rating 12V DC in Control	Mounting	VESA Mount	Enclosure	Metal
Accessory 1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Rating 12V DC in Optional Accessory Remote Controller (Optional, Varies by product) Potential Accessory Remote Controller (Optional, Varies by product) Potential Accessory Remote Controller (Optional, Varies by product) Accessory Remote Controller (Optional, Varies by product)	Cooling System	Fanless Design		
1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) Power Power Rating 12V DC in Control	Accessory			
Power Rating 12V DC in Control	Accessory	1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual	Optional Accessory	Remote Controller (Optional, Varies by product)
Control	Power			
	Power Rating	12V DC in		
Button 5 Keys: - , + , Power , Esc , Enter	Control			
	Button	5 Keys: - , + , Power , Esc , Enter		



DIMENSIONS UNIT:MM

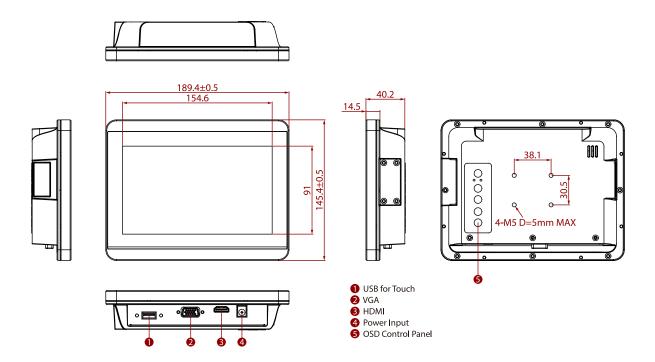

NOTE

- 1. This is a simplified drawing and some components are not marked in detail.
- 2. When with HDMI outside dimension and I/O will be different from standard.
- 3. Please contact our sales representative if you need further product information.
- 4. All specifications are subject to change without prior notice.
- 5. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.

Page 2/3



Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508 Support: +1 347 719 4508

1309 Coffeen Ave Ste 1200 Sheridan WY 82801 USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050 Support: +44 (0)1785 879 050

Unit A5 Douglas Park Stone Business Park Stone ST15 0YJ United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660