

EPBC 1000

Intel Atom[®] x6211E Processor (Elkhart Lake)
2.5" Pico-ITX Embedded Single Board Computer



^ In-Vehicle Infotainment



- Dual-core Intel Atom[®] x6211E Processor (Elkhart Lake), TDP 6W
- 2.5" Pico-ITX compact size, Small Form Factor (SFF), measure only 100 x 72 mm
- Supports fanless -40°C to 70°C Operation
- 1 DDR4 3200MHz SO-DIMM, up to 32GB
- DisplayPort supports up to 4K resolution
- 2 GigE LAN, 2 USB 3.1, 2 COM
- SIM Socket for 5G/WiFi/4G/LTE/GPRS/UMTS
- Expansion : M.2 Key B, M.2 Key E

▼ Intelligent Control



^ Factory Automation

intel
partner
Gold



Vecow

Specifications

System

Processor	Intel Atom® x6211E Processor (Elkhart Lake)
BIOS	AMI
SIO	IT8659E
Memory	1 DDR4 3200MHz SO-DIMM, up to 32GB
OS	Windows 10, Linux

Graphics

Graphics Processor	Intel® UHD Graphics for 10th Gen Intel® Processors
Interface	1 DisplayPort : Up to 4096 x 2160 @60Hz

Ethernet

LAN 1	Realtek RTL8119I supports GigE LAN
LAN 2	Realtek RTL8119I supports GigE LAN

Audio

Audio Codec	Realtek ALC888S-VD, 7.1 Channel HD Audio
Audio Interface	1 Mic-in, 1 Line-out

I/O Interface

Front I/O	- 2 RJ45 Connector - 2 USB Connector - 1 DisplayPort Connector - 1 SIM Card Socket - 1 Reset Button - 1 Power LED - 1 HDD LED - 1 WLAN LED - 1 WWAN LED
Internal I/O	- 1 DDR4 SO-DIMM Socket - 1 M.2 Key B Socket (2280, PCIe x2/SATA/USB3(Default)/USB2) - 1 M.2 Key E Socket (2230, PCIe/USB) - 1 SATA Data Connector - 1 SATA Power Connector - 1 Power Connector - 2 COM Header (1 RS-232/422/485, 1 RS-232) - 1 USB 2.0 Header - 1 GPIO Header - 1 Audio Mic-in and Line-out Header

Storage

SATA	1 SATA III (6Gbps)
------	--------------------

Expansion

M.2	- 1 M.2 Key B (2280, PCIe x2/SATA/USB3(Default)/USB2) - 1 M.2 Key E (2230, PCIe/USB)
-----	---

Power

Power Input	12V DC-in
Power Interface	2-pin Terminal Block : V+, V-

Others

Watchdog Timer	Reset : 1 to 255 sec./min. Per Step
HW Monitor	Monitoring temperature, voltages. Auto throttling control when CPU overheats.

Mechanical

Dimensions	100.0mm x 72.0mm (9.34" x 2.83")
------------	----------------------------------

Environment

Operating Temp.	-40°C to 70°C
Storage Temp.	-40°C to 85°C
Humidity	5% to 95% Humidity, non-condensing
Relative Humidity	95% @70°C
EMC	CE, FCC

* All product information may subject to change without prior notice.
 * The rights of all brand names, product names and trademarks belong to their respective owners.
 Copyright © 2022 Vecow Co., Ltd. All rights reserved.

Vecow info@vecow.com



Packing List

EPBC-1000	x1
Driver CD	x1
Cable Kit	
- USB 2.0 Cable	x1
- COM Port Cable	x2
- SATA Data Cable	x1
- SATA Power Cable	x1
- Audio Cable	x1

Order Information




Model	GigE LAN	USB 3.0	DisplayPort	SIM Socket
EPBC-1000	2	2	1	1

Accessories

75-VU2HSP0-010	Heat Spreader for EPBC-1000
75-VU2H5K0-010	Heat Sink for EPBC-1000
61-13Q1009-0DA	COM Port Cable
61-193102U-156	USB 2.0 Cable
61-13B0707-386	SATA Data Cable
61-1470022-005	SATA Power Cable (5V only)
61-1300024-39A	Audio Cable

Dimensions & Drawing

Unit : mm (inch)

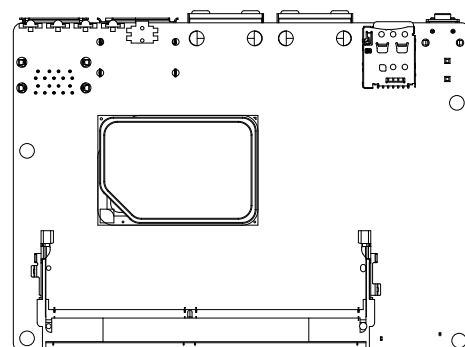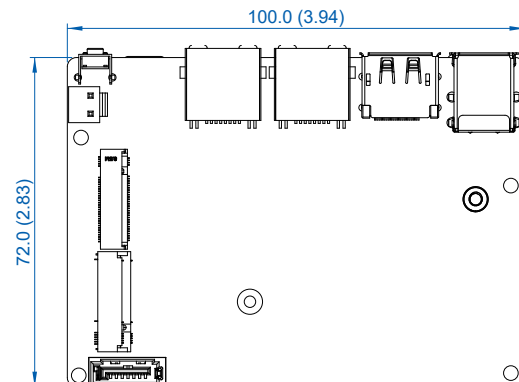

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660