

# ARS-7131 Series

Industrial 802.11a/b/g/n WiFi Access  
Point/Client/Bridge/Repeater with Router Capabilities



## Features


- ▶ Industrial 2x2 MIMO
- ▶ Atheros XSPAN Family Chipset
- ▶ Supports IEEE 802.11 a/b/g/n
- ▶ Supports 2\*10/100Base-TX WAN/LAN Ports
- ▶ Tx Power 21 dB for 2.4GHz
- ▶ Tx Power 18 dB for 5GHz
- ▶ WPA, WPA2, TKIP, AES
- ▶ Power Input: 9~48VDC in 6-Pin Terminal Block
- ▶ Reverse Polarity Protection
- ▶ IP30 Protection
- ▶ DIN-Rail and Wall Mountable
- ▶ Operating Temperature – STD: 0°C to 60°C; EOT: -35°C to 70°C
- ▶ 5-Year Warranty

## INTRODUCTION

**Antaira Technologies' ARS-7131 series** is a single radio industrial 802.11a/b/g/n wireless LAN access point with added router capabilities. With the Atheros XSPAN family chipset, it boasts network robustness, stability, and a wide network coverage with a very low voltage input of 9V. Based on IEEE 802.11 a/b/g/n, the access point supports high-speed data transmission of up to 867Mbps.

The ARS-7131 series is capable of operating in different modes, which makes it suitable for a wide variety of wireless applications including long-distance deployments. The unit also allows the user to position the wireless antennas in a better signal-broadcasting location for improved wireless coverage and signal strength or simply in a more convenient location.

## DIMENSIONS

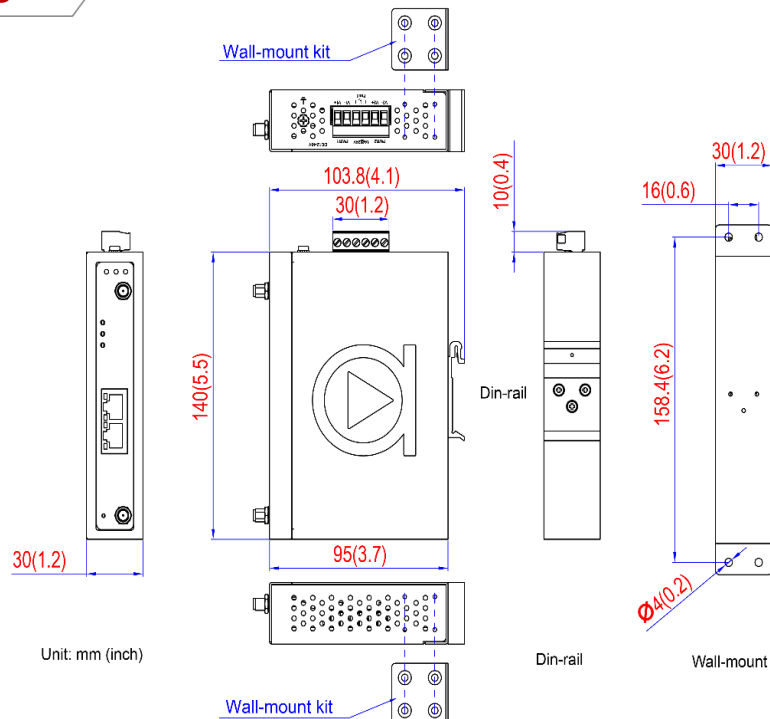

## SPECIFICATIONS

Technology		Power Requirement	
Protocol	IP, TCP, UDP, ARP, BOOTP, ICMP, HTTP, HTTPS, DNS Proxy, NTP, RADIUS, Dynamic DNS, SNMP	Input Voltage	9~48VDC, Redundant Input
IEEE	IEEE 802.11 a/b/g/n IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet	Power Connection	6-Pin Terminal Block
WLAN Operation Mode	AP/Client/Bridge/Repeater	Reverse Polarity Protection	Present
Encryption Security	WPA, WPA2, WPA3, WEP, TKIP, AES	Overload Current Protection	Present
Interface		Power Consumption	8 Watts
Ethernet Port	2*10/100Tx	Environmental Limits	
WLAN	Single Radio	Operating Temperature	STD: -10° to 60° C EOT: -35° to 70° C
Antenna	2*External Antennas	Storage Temperature	-40°C ~ 90°C
LED Indicators	Power, Fault, Wi-Fi Signal, Link, Activity	Ambient Relative Humidity	5 to 95%, (non-condensing)
Mechanical Characteristics		Regulatory Approvals	
Housing	Metal, IP30 Protection	EMI	FCC Part 15 Subpart B CE EN 55032 EN301489-1/-17 FCC Part 15 Subpart B CNS13438 AS/NZS CSIPR 32
Dimensions	30 x 140 x 95mm (W*H*D)		CE EN 55024 IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT), IEC61000-4-5 (Surge), IEC61000-4-6 (CS), IEC61000-4-8 (Magnetic Field) IEC61000-4-11
Weight	Unit: 0.60 lb. Shipping: 1.0 lb.		
Mounting	DIN-Rail, Wall Mounting		
		Free Fall	IEC60068-2-32
		Shock	IEC60068-2-27
		Vibration	IEC60068-2-6
		Green	RoHS Compliant
		Certifications	FCC, CE
		Warranty	5 Years

## ORDERING INFO

ARS-7131	Industrial 802.11a/b/g/n WiFi Access Point/Client/Bridge/Repeater with Router capabilities, STD: -10°C to 60°C
ARS-7131-T	Industrial 802.11a/b/g/n WiFi Access Point/Client/Bridge/Repeater with Router capabilities; EOT: -35°C to 70°C

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660