



## Four and Eight Quadrature Inputs PCI Express Mini Card Data Sheet

### FEATURES

- PCI EXPRESS MINI CARD (mPCIe) TYPE F1, WITH LATCHING I/O CONNECTORS
- DIRECT INTERFACE TO FOUR OR EIGHT QUADRATURE ENCODERS (A, B & INDEX (Z))
- SINGLE-ENDED OR DIFFERENTIAL 3V OR 5V ENCODER INPUTS
- 32-BIT COUNTERS; COUNT MODES INCLUDE QUADRATURE (X1, X2, X4), FREE-RUN, NON-QUADRATURE (UP/DOWN), NON-RECYCLE, MODULO-N, AND RANGE LIMIT
- SELECTABLE CLOCK SOURCE (10MHZ, 20MHZ & 40MHZ) (FOR DIGITAL FILTERING ON INPUTS)
- INTERRUPT GENERATION FROM VARIOUS STATUS CHANGES
  - SELECT FLAGS FOR INTERRUPT SOURCE (INSTANTANEOUS OR LATCHED)
- PANEL-MOUNTABLE DB-37F FOUR CHANNEL MODULE
- TWO MODULES DAISY-CHAINABLE FOR EIGHT QUADRATURE INPUTS (TWO DB-37F CONNECTORS)
- 9" CABLE(S) (228MM) CONNECT BETWEEN QUAD MODULE(S) AND mPCIe CARD
- AVAILABLE IN INDUSTRIAL TEMPERATURE OPERATION (-40°C TO +85°C), ROHS STANDARD

### MODELS mPCIe-QUAD-8 AND mPCIe-QUAD-4



### FUNCTIONAL DESCRIPTION

The mPCIe-QUAD-8 consists of a type F1 PCI Express Mini Card (mPCIe) interface board that connects to one or two DB-37F Modules via included 9" cables. The modules are designed to be easily panel-mounted in any application environment, and have convenient mounting holes for non-panel-mount applications. Up to eight differential (or single-ended) encoders (each with A, B, and Index) can be monitored simultaneously.

Type ISL32173 differential input circuits provide compatibility with a wide variety of quadrature encoder outputs.

The LSI/CSI LS7766 features:

- 32-bit quadrature counters support x1, x2, and x4 counting modes, or can be used as non-quadrature up/down counters
  - Quadrature frequencies up to 9.6MHz
    - 4.5MHz when powered with 3.3VDC
  - Non-quadrature frequencies up to 40MHz when powered with 5VDC
    - 20MHz when powered with 3.3VDC
- Programmable index and marker flags (carry, borrow, sign & compare)
  - Enable/disable sources generating IRQ's
- Programmable count modes:
  - Normal (free-run) / Modulo-N / Range Limit / Non-Recycle, Binary / BCD

The mPCIe-QUAD cards are well suited for use in industrial and embedded environments and factory locations.


### SPECIAL ORDER

Please contact ACCES with your requirements. Example special orders include conformal coating, custom software or product labelling, and more. We will work with you to provide *exactly* what is required.

### ACCESSORIES

Available accessories include:

- |                         |  |
|-------------------------|--|
| <b>ADAP37M</b>          | 37-pin Screw Terminal Board (direct plug-in)                 |
| <b>STB-37</b>           | 37-pin Screw Terminal Board (needs male-female ribbon cable) |
| <b>mPCIe-HDW-KIT2</b>   | Mounting hardware for 2mm                                    |
| <b>mPCIe-HDW-KIT2.5</b> | Mounting hardware for 2.5mm                                  |

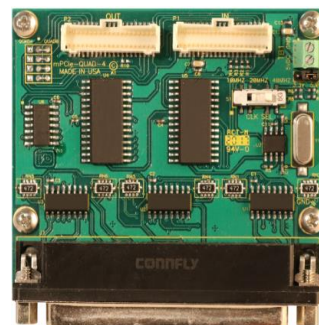


### SOFTWARE

The card is supported for use in most operating systems and includes a free DOS, Linux (including macOS) and Windows compatible software package. This package contains sample programs and source code in C#, Visual Basic, Delphi, and Visual C++ for Windows. Also provided is a graphical setup program in Windows. Linux support includes installation files and basic samples for programming from user level via an open source kernel driver. Third party support includes a Windows standard DLL interface usable from the most popular application programs, and includes LabVIEW VIs. Embedded OS support includes the family of Windows Operating Systems including IoT. Full register-level documentation of all features ensures easy compatibility in any application environment.



## Four and Eight Quadrature Inputs PCI Express Mini Card Data Sheet

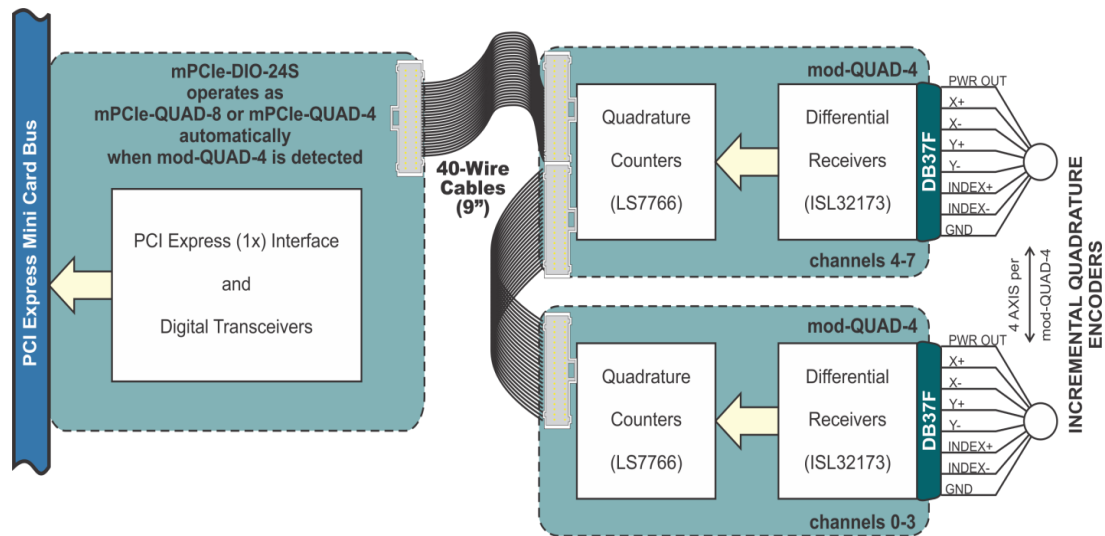

### PC Interface

PCI Express Mini Card	Type F1 "Full Length"
-----------------------	-----------------------

### Quadrature Inputs

Counters	8 (or 4)
Receiver Type	ISL32173
Configuration	Phase A, B and Index; differential or single-ended
Sensitivity	± 200 mV
Hysteresis	30 mV typical
Impedance	Internal 48kΩ minimum

### Environmental

Temperature	Operating	0° to 70°C (order "-T" for -40° to 85°C)
	Storage	-40° to 85°C
Humidity		5% to 95%, non-condensing
Power required	+5.0VDC	165mA with external power (+ encoder power)
	+3.3VDC	430mA using self power (+ encoder power)

### Physical

mPCIe board characteristics		
Weight		6.2 grams
Size	Length	50.95mm (2.006")
	Width	30.00mm (1.181")
I/O connector	On-card	Molex 501190-4017 40-pin latching
	mating	Molex 501189-4010

### 4-Channel Quadrature Input Module characteristics

Weight		45 grams (+ 11.8 grams for the 9" cable)
Size	Length	2.835" (72.01mm)
	Width	2.362" (59.99mm)
I/O connector	On-module	Female, D-Sub Miniature, 37-pin
	Mating	Male, D-Sub Miniature, 37-pin

DB-37 Female Pinout			
1	INLO_A0/4	20	INHI_A0/4
2	PWR OUT	21	INHI_B0/4
3	INLO_B0/4	22	GND
4	PWR OUT	23	INHI_Z0/4
5	INLO_Z0/4	24	INLO_Z2/6
6	NC	25	INHI_A2/6
7	INLO_A2/6	26	INHI_B2/6
8	PWR OUT	27	GND
9	INLO_B2/6	28	INHI_Z2/6
10	PWR OUT	29	INLO_Z3/7
11	INLO_A3/7	30	INHI_A3/7
12	PWR OUT	31	INHI_B3/7
13	INLO_B3/7	32	GND
14	PWR OUT	33	INHI_Z3/7
15	INLO_A1/5	34	INHI_A1/5
16	PWR OUT	35	INHI_B1/5
17	INLO_B1/5	36	GND
18	PWR OUT	37	INHI_Z1/5
19	INLO_Z1/5		

Signal Definitions	
Signal	Meanings
INLO_Ax	Low side differential "A" input
INHI_Ax	High side differential "A" input
INLO_Bx	Low side differential "B" input
INHI_Bx	High side differential "B" input
INLO_Zx	Low side differential "Z" input (Index)
INHI_Zx	High side differential "Z" input (Index)
PWR OUT	Encoder Power Output
GND	Ground

### ORDERING GUIDE

mPCIe-QUAD-8	Two 4 Channel Quadrature Input Modules, mPCIe Card and interconnect cables
mPCIe-QUAD-4	4 Channel Quadrature Input Module, mPCIe Card and interconnect cable
<i>Add -T to your model # for Industrial Temperature Option (-40° to 85°C)</i>	

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660